



# Digital Signals

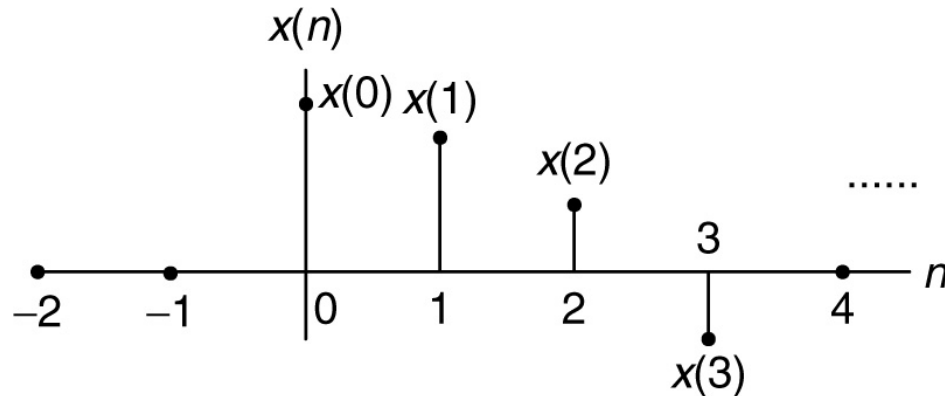

Copyright © 2007 by Academic Press. All rights reserved.

$x(0)$ : zero-th sample amplitude at the sample number  $n = 0$ ,  
 $x(1)$ : first sample amplitude at the sample number  $n = 1$ ,  
 $x(2)$ : second sample amplitude at the sample number  $n = 2$ ,  
 $x(3)$ : third sample amplitude at the sample number  $n = 3$ , and so on.

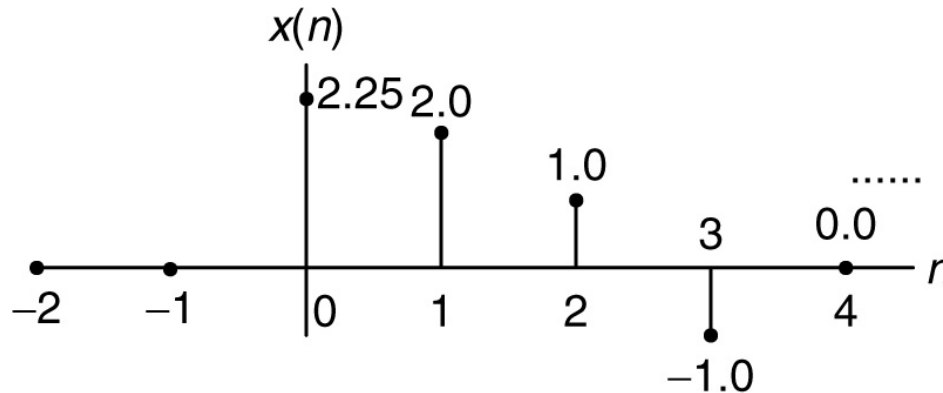

Copyright © 2007 by Academic Press. All rights reserved.

CEN352, Dr. Ghulam Muhammad  
King Saud University


For floating point DS processor, the amplitudes can be floating points.

# Common Digital Sequences

---


**Unit-impulse sequence:**

$$\delta(n) = \begin{cases} 1 & n = 0 \\ 0 & n \neq 0 \end{cases}$$

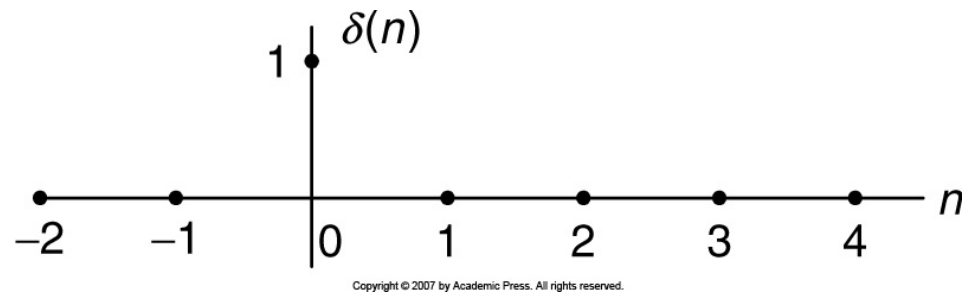

**Unit-step sequence:**

$$u(n) = \begin{cases} 1 & n \geq 0 \\ 0 & n < 0 \end{cases}$$


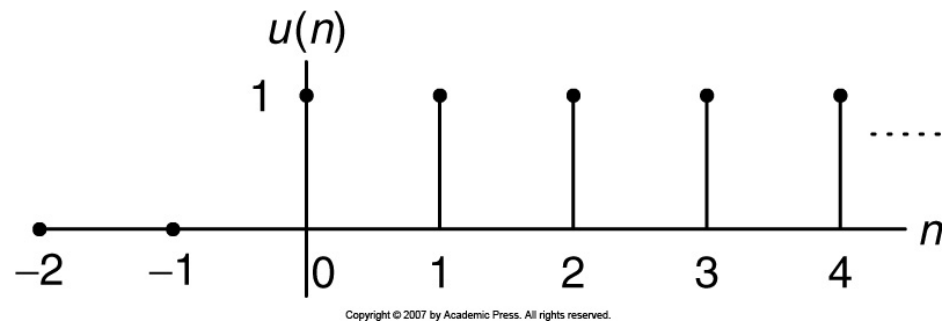


# Shifted Sequences



Shifted unit-impulse

Shifted unit-step

Right shift by two samples

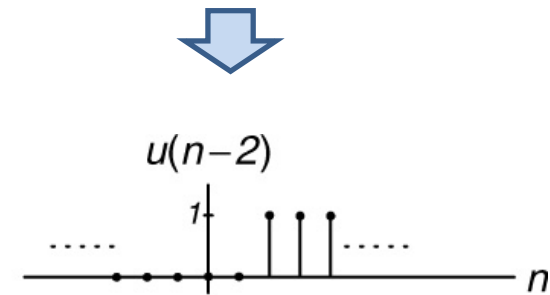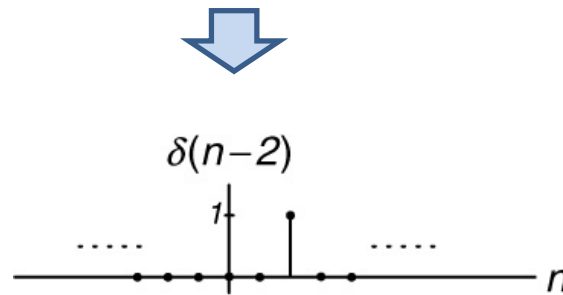

Left shift by two samples

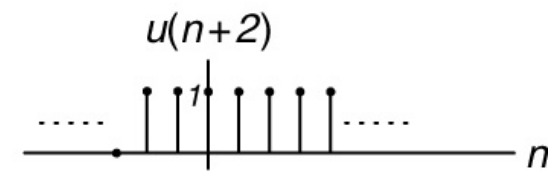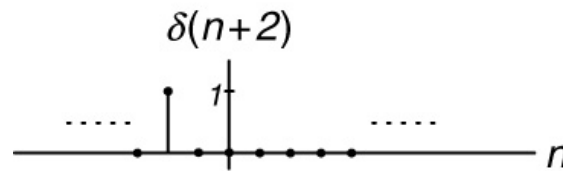


Copyright © 2007 by Academic Press. All rights reserved.

# Sinusoidal and Exponential Sequences

Example

$n$	$x(n) = 10 \cos(0.125\pi n)u(n)$
0	10.0000
1	9.2388
2	7.0711
3	3.8628
4	0.0000
5	-3.8628
6	-7.0711
7	-9.2388

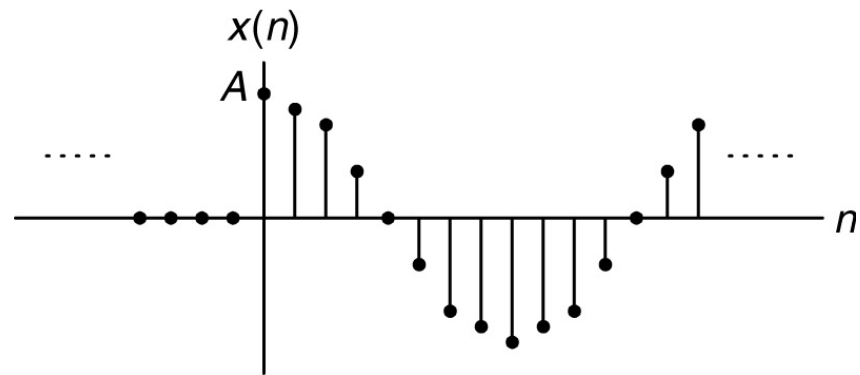


Copyright © 2007 by Academic Press. All rights reserved.

Sinusoidal

Example

$n$	$10(0.75)^n u(n)$
0	10.0000
1	7.5000
2	5.6250
3	4.2188
4	3.1641
5	2.3730
6	1.7798
7	1.3348

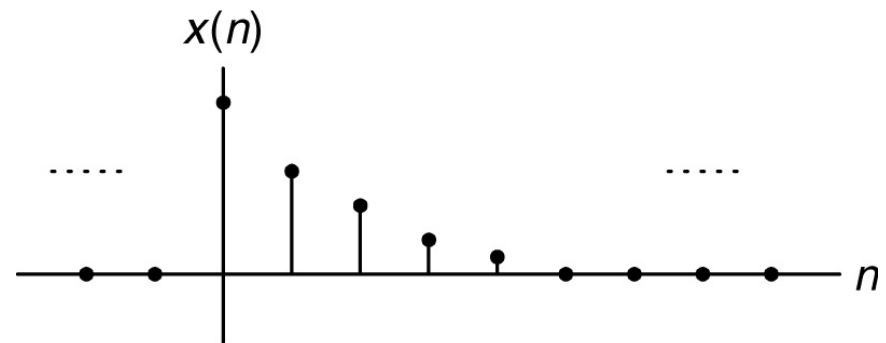

Copyright © 2007 by Academic Press. All rights reserved.

Exponential





# Example 1

Given the following,

$$x(n] = \delta(n + 1) + 0.5\delta(n - 1) + 2\delta(n - 2),$$

a. Sketch this sequence.

**Solution:**

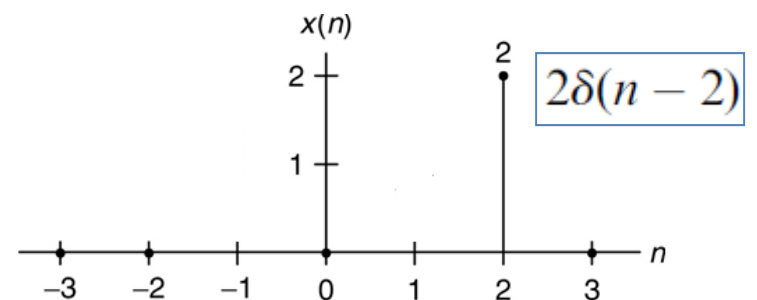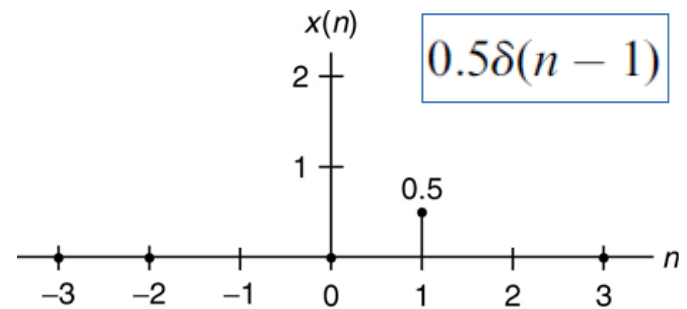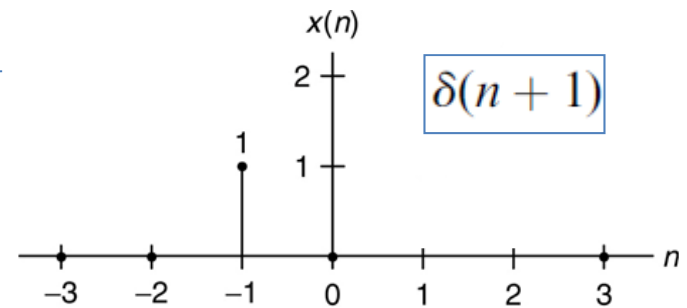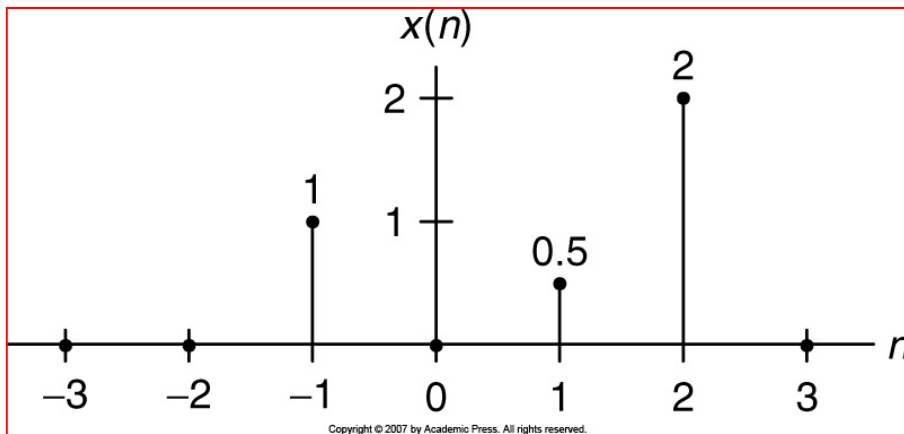

# Generation of Digital Signals

Let, sampling interval,  $\Delta t = T$

$x(n)$ : digital signal

$x(t)$ : analog signal

$$x(n) = x(t)|_{t=nT} = x(nT)$$

Also  $u(t)|_{t=nT} = u(nT) = u(n)$

## Example 2

Convert analog signal  $x(t)$  into digital signal  $x(n)$ , when sampling period is 125 microsecond, also plot sample values.

$$x(t) = 10e^{-5000t}u(t)$$

**Solution:**

$$t = nT = n \times 0.000125 = 0.000125n$$

$$x(n) = x(nT) = 10e^{-5000 \times 0.000125n}u(nT) = 10e^{-0.625n}u(n)$$

## Example 2 (contd.)

The first five sample values:



$$x(0) = 10e^{-0.625 \times 0} u(0) = 10.0$$


$$x(1) = 10e^{-0.625 \times 1} u(1) = 5.3526$$

$$x(2) = 10e^{-0.625 \times 2} u(2) = 2.8650$$

$$x(3) = 10e^{-0.625 \times 3} u(3) = 1.5335$$

$$x(4) = 10e^{-0.625 \times 4} u(4) = 0.8208$$

Plot of the digital sequence:

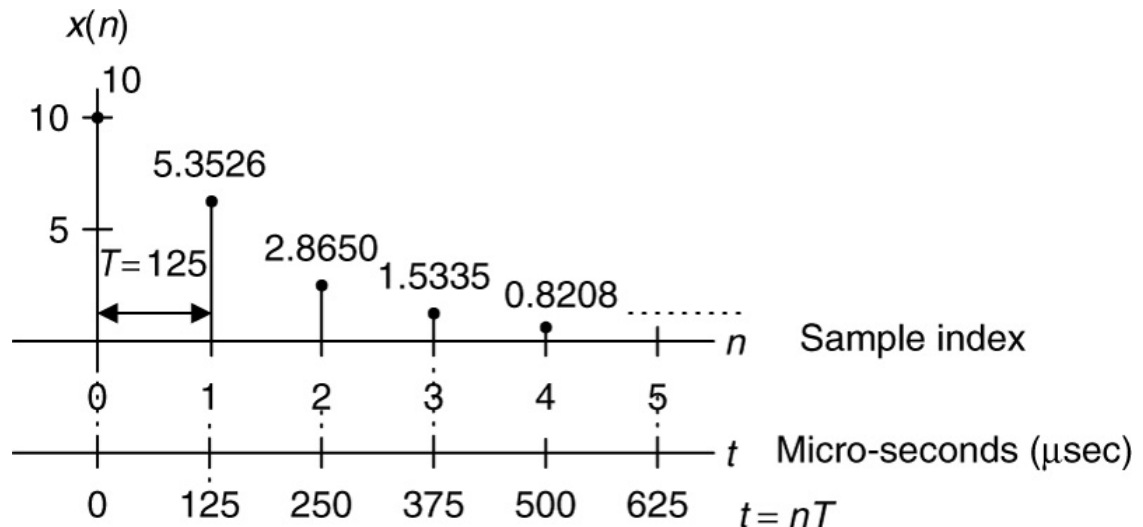


Copyright © 2007 by Academic Press. All rights reserved.

# Linear System

**System:** A system that produces an output signal in response to an input signal.

Continuous system & discrete system.

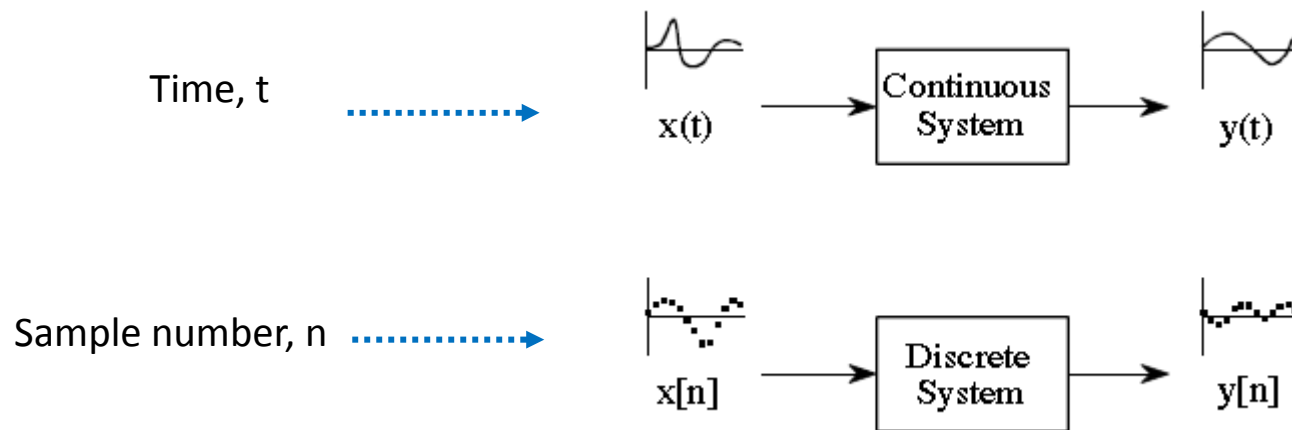



# Linear Systems: Property 1


1. Homogeneity
  2. Additivity
  3. Shift invariance
- Must for all linear systems
- Must for DSP linear systems

**Homogeneity:** (deals with amplitude)


If  $x[n] \rightarrow y[n]$ , then  $kx[n] \rightarrow ky[n]$

$K$  is a constant

*IF*

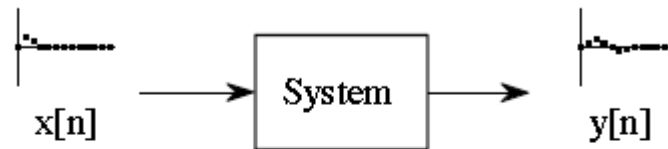


*THEN*

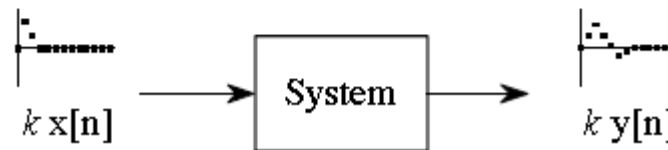


# Linear Systems: Property 2

## Additivity

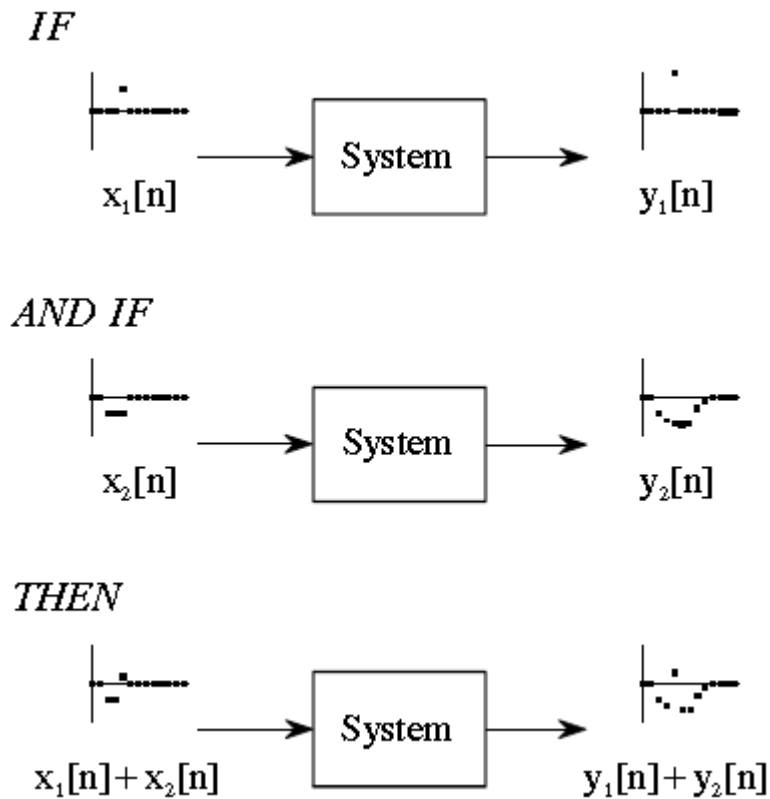


## Homogeneity & Additivity

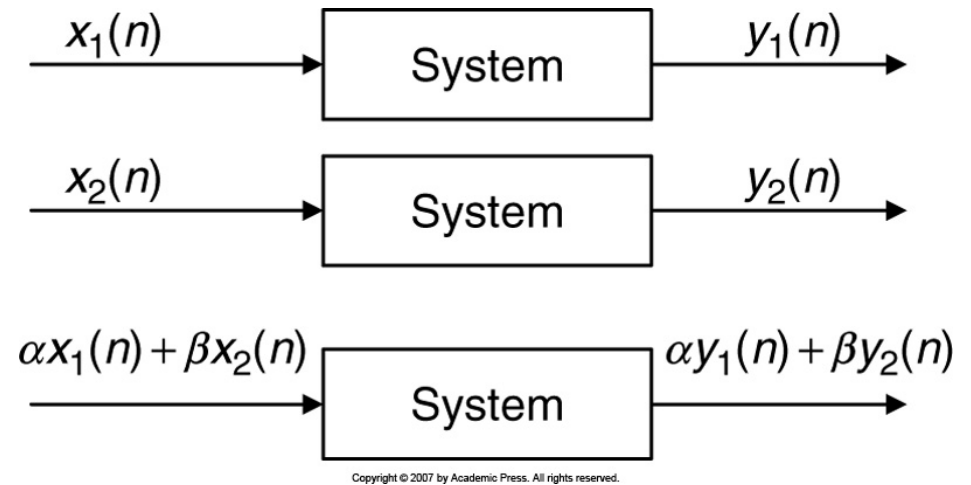

# Linear Systems: Property 3


## Shift (time) Invariance

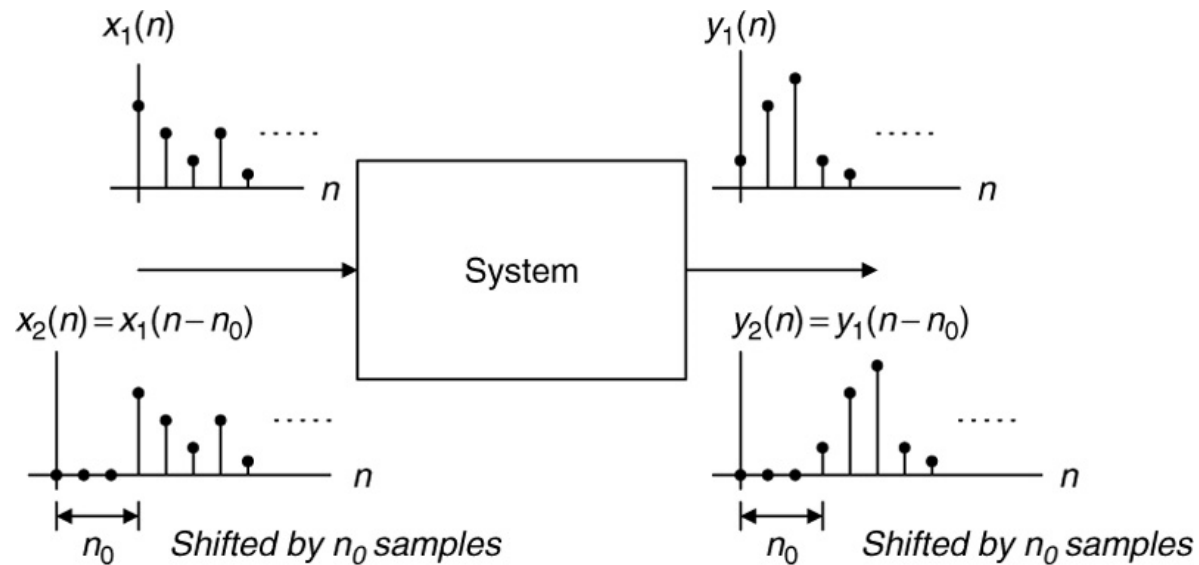

Copyright © 2007 by Academic Press. All rights reserved.



# Example 3

Let a digital amplifier,  $y(n) = 10x(n)$




If the inputs are:  $x_1(n) = u(n)$  and  $x_2(n) = \delta(n)$

Outputs will be:  $y_1(n) = 10u(n)$  and  $y_2(n) = 10\delta(n)$ , respectively.




If we apply combined input to the system:  $x(n) = 2x_1(n) + 4x_2(n) = 2u(n) + 4\delta(n)$

The output will be:  $y(n) = 10x(n) = 10(2u(n) + 4\delta(n)) = 20u(n) + 40\delta(n)$

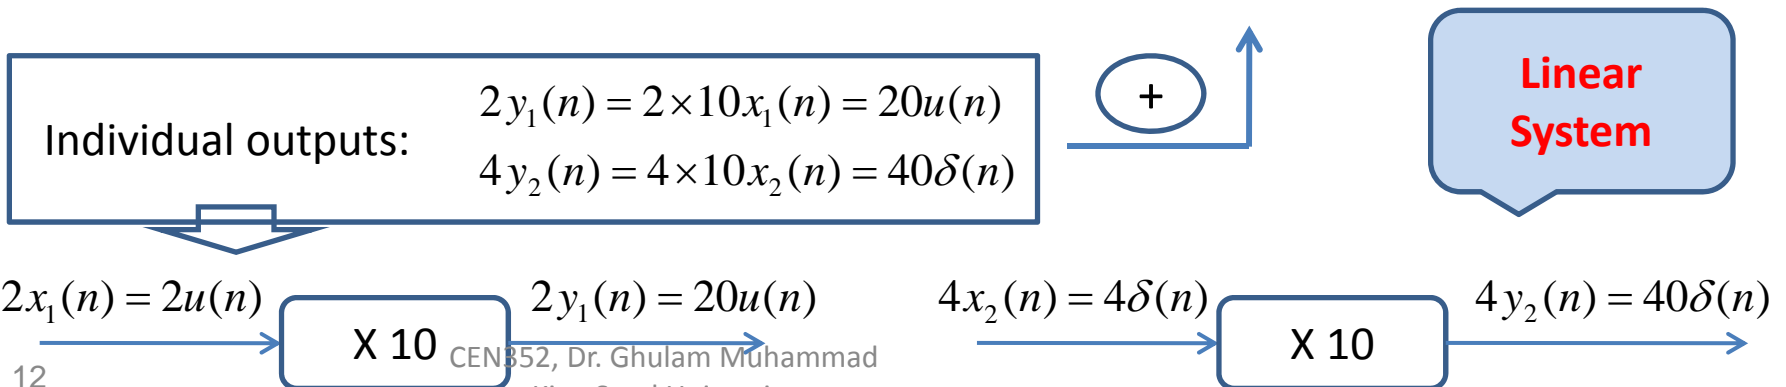


# Example 4

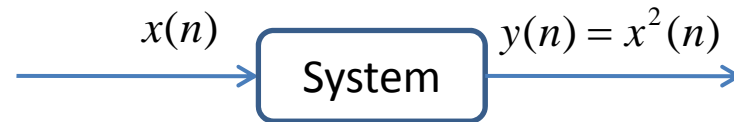

If the input is:  $4x_1(n) + 2x_2(n)$

$$\begin{aligned} \text{Then the output is: } y(n) &= x^2(n) = (4x_1(n) + 2x_2(n))^2 \\ &= (4u(n) + 2\delta(n))^2 = 16u^2(n) + 16u(n)\delta(n) + 4\delta^2(n) \\ &= 16u(n) + 20\delta(n). \end{aligned}$$

Individual outputs:	$4y_1(n) = 4 \times x_1^2(n) = 4u(n)$
	$2y_2(n) = 2 \times x_2^2(n) = 2\delta(n)$




**Non Linear System**

# Example 5 (a)

Given the linear system  $y(n) = 2x(n - 5)$ , find whether the system is time invariant or not.

**Solution:**

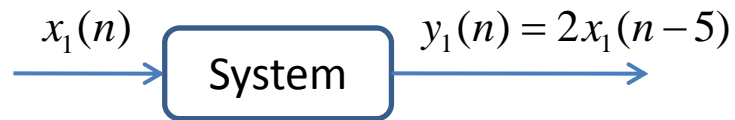

Let the shifted input be:  $x_2(n) = x_1(n - n_0)$

Therefore system output:  $y_2(n) = 2x_2(n - 5) = 2x_1(n - n_0 - 5)$ .


Shifting  $y_1(n) = 2x_1(n - 5)$  by  $n_0$  samples leads to  $y_1(n - n_0) = 2x_1(n - 5 - n_0)$ .

**Time Invariant**

## Example 5 (b)

Given the linear system  $y(n) = 2x(3n)$ , find whether the system is time invariant or not.

**Solution:**



Let the shifted input be:  $x_2(n) = x_1(n - n_0)$

Therefore system output:  $y_2(n) = 2x_2(3n) = 2x_1(3n - n_0)$  ← NOT Equal

Shifting  $y_1(n) = 2x_1(3n)$  by  $n_0$  samples leads to

$$y_1(n - n_0) = 2x_1(3(n - n_0)) = 2x_1(3n - 3n_0)$$

**NOT Time Invariant**

# Causality

## Causal System:

Output  $y(n)$  at time  $n$  depends on current input  $x(n)$  at time  $n$  or previous inputs, such as  $x(n-1)$ ,  $x(n-2)$ , etc.

**Example:**

$$y(n) = 0.5x(n) + 2.5x(n - 2), \text{ for } n \geq 0$$

## Non Causal System:

Output  $y(n)$  at time  $n$  depends on future inputs, such as  $x(n+1)$ ,  $x(n+2)$ , etc.

**Example:**

$$y(n) = 0.25x(n - 1) + 0.5x(n + 1) - 0.4y(n - 1), \text{ for } n \geq 0$$

The non causal system cannot be realized in real time.



# Difference Equation

A causal, linear, and time invariant system can be represented by a difference equation as follows:

$$\underbrace{y(n) + a_1y(n-1) + \dots + a_Ny(n-N)}_{\text{Outputs}} = \underbrace{b_0x(n) + b_1x(n-1) + \dots + b_Mx(n-M)}_{\text{Inputs}}$$

After rearranging:

$$y(n) = -a_1y(n-1) - \dots - a_Ny(n-N) + b_0x(n) + b_1x(n-1) + \dots + b_Mx(n-M)$$

Finally:

$$y(n) = -\sum_{i=1}^N a_i y(n-i) + \sum_{j=0}^M b_j x(n-j)$$


## Example 6

Identify non zero system coefficients of the following difference equations.


$$y(n) = 0.25y(n - 1) + x(n) \xrightarrow{\text{Solution:}} b_0 = 1, \quad a_1 = -0.25$$

$$y(n) = x(n) + 0.5x(n - 1) \xrightarrow{\text{Solution:}} b_0 = 1, \quad b_1 = 0.5$$

# System Representation Using Impulse Response

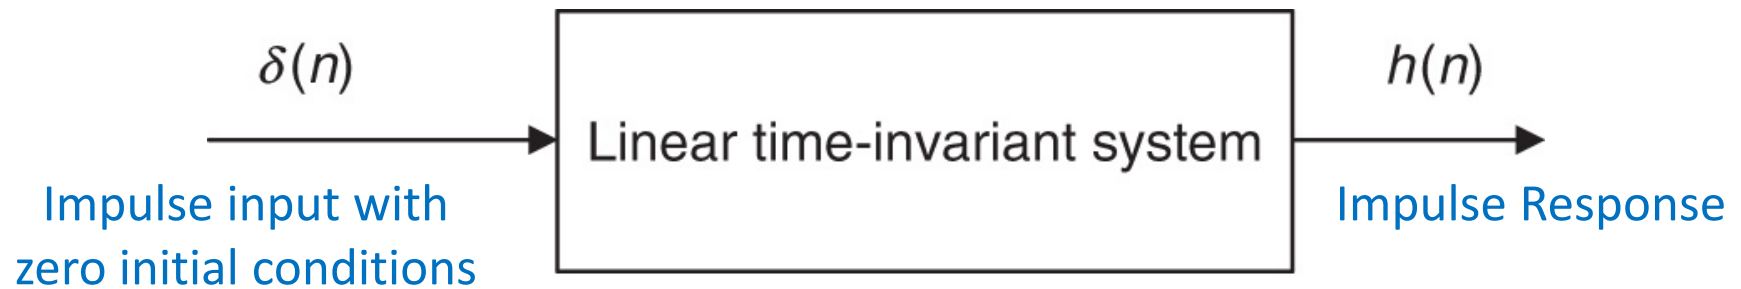

Copyright © 2007 by Academic Press. All rights reserved.

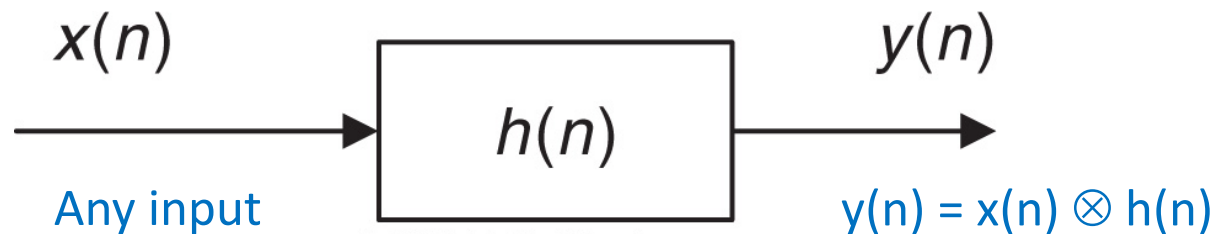

Copyright © 2007 by Academic Press. All rights reserved.

Convolution

$$y(n) = \dots + h(-1)x(n+1) + h(0)x(n) + h(1)x(n-1) + h(2)x(n-2) + \dots$$

# Example 7 (a)

Given the linear time-invariant system:

$$y(n] = 0.5x(n] + 0.25x(n - 1) \text{ with an initial condition } x(-1) = 0,$$

- Determine the unit-impulse response  $h(n)$ .
- Draw the system block diagram.
- Write the output using the obtained impulse response.

---


**Solution:**

**a.** let  $x(n] = \delta(n]$

$$h(n] = y(n] = 0.5x(n] + 0.25x(n - 1) = 0.5\delta(n] + 0.25\delta(n - 1)$$

Therefore,

$$h(n] = \begin{cases} 0.5 & n = 0 \\ 0.25 & n = 1 \\ 0 & \text{elsewhere} \end{cases}$$



**c.**  $y(n] = h(0)x(n] + h(1)x(n - 1)$

# Example 7 (b)

Given the difference equation

$$y(n] = 0.25y(n - 1) + x(n) \text{ for } n \geq 0 \text{ and } y(-1) = 0,$$

- Determine the unit-impulse response  $h(n)$ .
- Draw the system block diagram.
- Write the output using the obtained impulse response.

---

## Solution:

a. let  $x(n] = \delta(n]$  Then  $h(n] = 0.25h(n - 1) + \delta(n]$ .

$$h(0] = 0.25h(-1) + \delta(0] = 0.25 \times 0 + 1 = 1$$

$$h(1] = 0.25h(0] + \delta(1] = 0.25 \times 1 + 0 = 0.25$$

$$h(2] = 0.25h(1] + \delta(2] = 0.25 \times 0.25 + 0 = 0.0625$$


...

With the calculated results, we can predict the impulse response as

$$h(n] = (0.25)^n u(n] = \delta(n] + 0.25\delta(n - 1) + 0.0625\delta(n - 2) + \dots$$

Infinite!

## Example 7 (b) - contd.



c. 
$$y(n) = h(0)x(n) + h(1)x(n-1) + h(2)x(n-2) + \dots$$
$$= x(n) + 0.25x(n-1) + 0.0625x(n-2) + \dots$$

---

### Finite Impulse Response (FIR) system:

When the difference equation contains no previous outputs, i.e. ' $a$ ' coefficients are zero. < See example 7 (a) >

### Infinite Impulse Response (IIR) system:

When the difference equation contains previous outputs, i.e. ' $a$ ' coefficients are not all zero. < See example 7 (b) >

# BIBO Stability

## BIBO: Bounded In and Bounded Out

A stable system is one for which every bounded input produces a bounded output.

$$y(n) = \dots + h(-1)x(n+1) + h(0)x(n) + h(1)x(n-1) + h(2)x(n-2) + \dots$$

Let, in the worst case, every input value reaches to maximum value  $M$ .

$$y(n) = M(\dots + h(-1) + h(0) + h(1) + h(2) + \dots).$$

Using absolute values of the impulse responses,

$$y(n) < M(\dots + |h(-1)| + |h(0)| + |h(1)| + |h(2)| + \dots).$$


If the impulse responses are finite number, then **output is also finite.**

**Stable system.**

# BIBO Stability - contd.

To determine whether a system is stable, we apply the following equation:

$$S = \sum_{k=-\infty}^{\infty} |h(k)| = \dots + |h(-1)| + |h(0)| + |h(1)| + \dots < \infty.$$

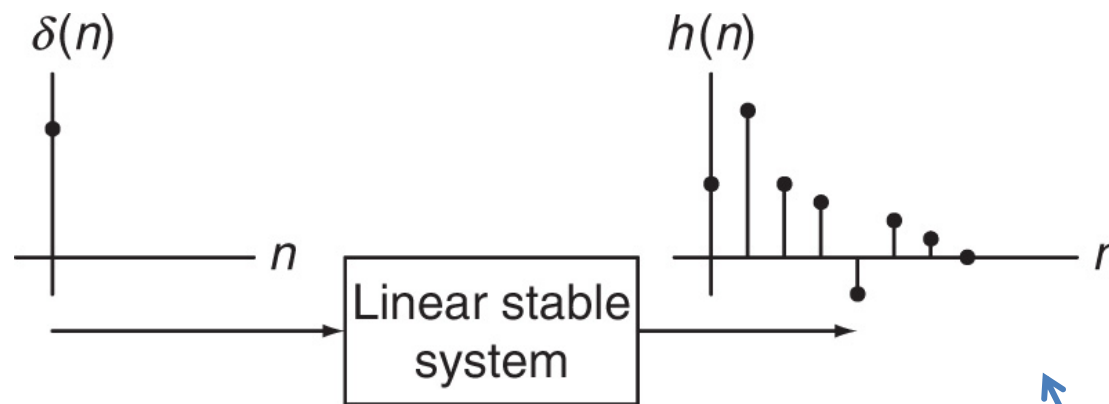

Copyright © 2007 by Academic Press. All rights reserved.

**Impulse response is decreasing to zero.**



## Example 8

Given a linear system given by:  $y(n) = 0.25y(n - 1) + x(n)$  for  $n \geq 0$  and  $y(-1) = 0$

Which is described by the unit-impulse response:  $h(n) = (0.25)^n u(n)$

Determine whether the system is stable or not.

---

**Solution:**

$$S = \sum_{k=-\infty}^{\infty} |h(k)| = \sum_{k=-\infty}^{\infty} |(0.25)^k u(k)|$$

Using definition of step function:  $u(k) = 1$  for  $k \geq 0$ ,   $S = \sum_{k=0}^{\infty} (0.25)^k = 1 + 0.25 + 0.25^2 + \dots$

For  $a < 1$ , we know  $\sum_{k=0}^{\infty} a^k = \frac{1}{1-a}$  where  $a = 0.25 < 1$

Therefore  $S = 1 + 0.25 + 0.25^2 + \dots = \frac{1}{1-0.25} = \frac{4}{3} < \infty$


**The summation is finite, so the system is stable.**

# Digital Convolution

$$y(n) = \sum_{k=-\infty}^{\infty} h(k)x(n-k)$$

$$= \dots + h(-1)x(n+1) + h(0)x(n) + h(1)x(n-1) + h(2)x(n-2) + \dots$$

The sequences are interchangeable.


$$y(n) = \sum_{k=-\infty}^{\infty} h(k)x(n-k) = \sum_{k=-\infty}^{\infty} x(k)h(n-k)$$

**Commutative**

$$x[n] * h[n] = h[n] * x[n]$$

Convolution sum requires  $h(n)$  to be reversed and shifted.

If  $h(n)$  is the given sequence,  $h(-n)$  is the reversed sequence.

# Reversed Sequence

Given a sequence,


$$h(k) = \begin{cases} 3, & k = 0,1 \\ 1, & k = 2,3 \\ 0 & \text{elsewhere} \end{cases}$$

where  $k$  is the time index or sample number,

- a. Sketch the sequence  $h(k)$  and reversed sequence  $h(-k)$ .


**Solution:**

**a.**

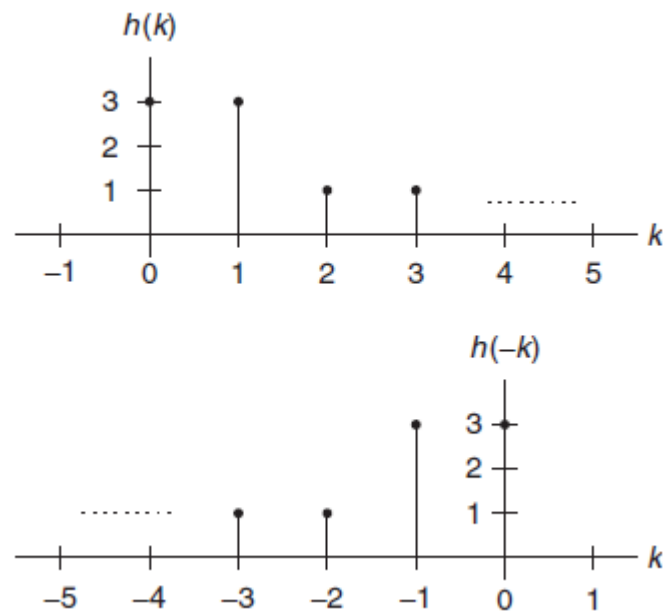

# Convolution Using Table Method

## Example 9

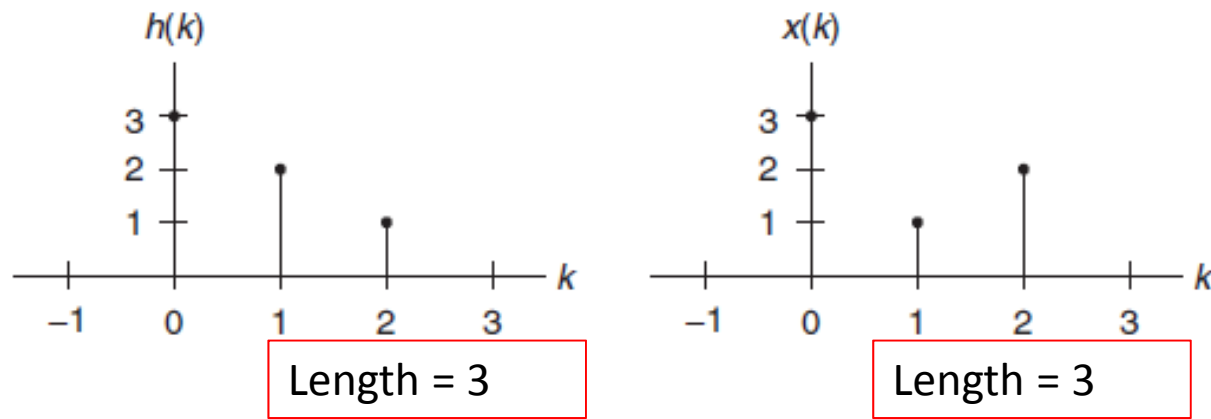

**Solution:**

**Convolution sum using the table method.**

$k:$	-2	-1	0	1	2	3	4	5	
$x(k):$			3	1	2				
$h(-k):$	1	2	3						$y(0) = 3 \times 3 = 9$
$h(1-k)$		1	2	3					$y(1) = 3 \times 2 + 1 \times 3 = 9$
$h(2-k)$			1	2	3				$y(2) = 3 \times 1 + 1 \times 2 + 2 \times 3 = 11$
$h(3-k)$				1	2	3			$y(3) = 1 \times 1 + 2 \times 2 = 5$
$h(4-k)$					1	2	3		$y(4) = 2 \times 1 = 2$
$h(5-k)$						1	2	3	$y(5) = 0$ (no overlap)

**Convolution length =  $3 + 3 - 1 = 5$**

# Convolution Using Table Method

## Example 10

$$x(n) = \begin{cases} 1 & n = 0, 1, 2 \\ 0 & \text{otherwise} \end{cases} \text{ and } h(n) = \begin{cases} 0 & n = 0 \\ 1 & n = 1, 2 \\ 0 & \text{otherwise} \end{cases}$$

Length = 3

Length = 2

**Solution:**


$k:$	-2	-1	0	1	2	3	4	5	...	
$x(k):$			1	1	1				...	
$h(-k):$	1	1	0							$y(0) = 0$ (no overlap)
$h(1-k)$		1	1	0						$y(1) = 1 \times 1 = 1$
$h(2-k)$			1	1	0					$y(2) = 1 \times 1 + 1 \times 1 = 2$
$h(3-k)$				1	1	0				$y(3) = 1 \times 1 + 1 \times 1 = 2$
$h(4-k)$					1	1	0			$y(4) = 1 \times 1 = 1$
$h(n-k)$						1	1	0		$y(n) = 0, n \geq 5$ (no overlap)
										Stop

Convolution length =  $3 + 2 - 1 = 4$



# Convolution Properties

Commutative:  $a[n] * b[n] = b[n] * a[n]$


Associative:  $(a[n] * b[n]) * c[n] = a[n] * (b[n] * c[n])$



Distributive:  $a[n] * b[n] + a[n] * c[n] = a[n] * (b[n] + c[n])$

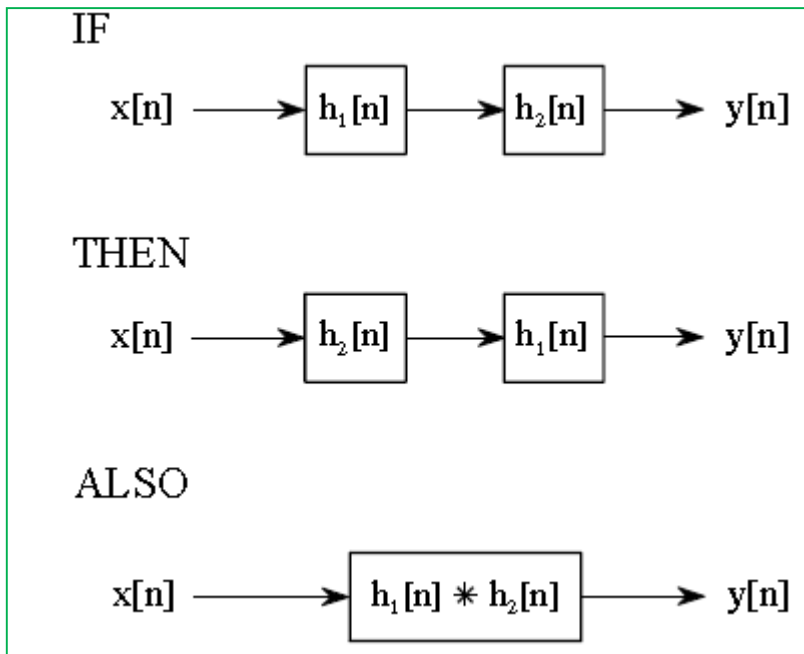

Associative

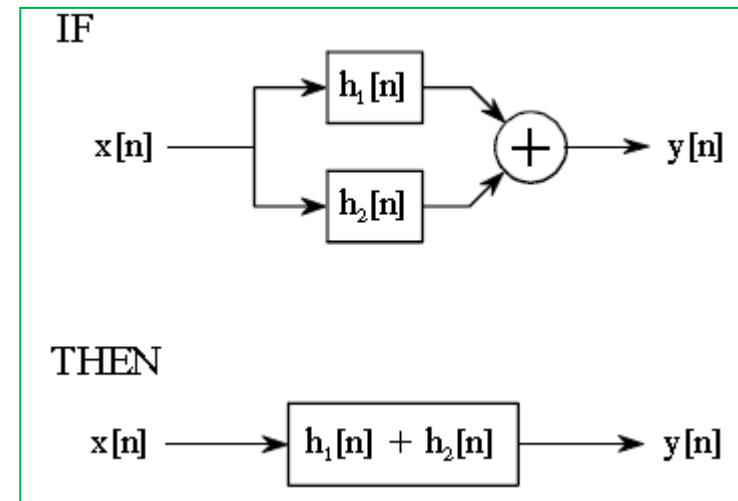

Distributive