

# CHAPTER 30

## SOURCES OF THE MAGNETIC FIELD

30.1 THE BIOT–SAVART LAW

30.2 THE MAGNETIC FORCE BETWEEN TWO PARALLEL  
CONDUCTORS

30.3 AMPERE'S LAW

30.4 THE MAGNETIC FIELD OF A SOLENOID


30.5 MAGNETIC FLUX

30.6 GAUSS'S LAW IN MAGNETISM

# 30.1 THE BIOT-SAVART LAW

Jean-Baptiste Biot (1774–1862) and Félix Savart (1791–1841) performed quantitative experiments on the force exerted by an electric current on a nearby magnet.

Properties of the magnetic field created by an electric current

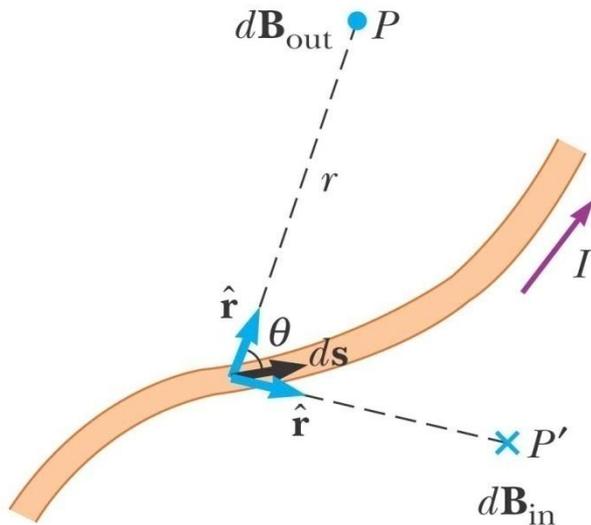

- The vector  $d\mathbf{B}$  is perpendicular both to  $ds$  (which points in the direction of the current) and to the unit vector directed from  $ds$  to  $P$ .
- The magnitude of  $d\mathbf{B}$  is inversely proportional to  $r^2$ , where  $r$  is the distance from  $ds$  to  $P$ .
- The magnitude of  $d\mathbf{B}$  is proportional to the current and to the magnitude  $ds$  of the length element  $ds$ .
- The magnitude of  $d\mathbf{B}$  is proportional to  $\sin \theta$ , where  $\theta$  is the angle between the vectors  $ds$  and  $\hat{r}$ .

The magnetic field  $d\mathbf{B}$  at a point due to the current  $I$  through a length element  $ds$  is given by the Biot-Savart law. The direction of the field is out of the page at  $P$  and into the page at  $P'$ .

These observations are summarized in the mathematical formula known today as the **Biot–Savart law**:

$$d\mathbf{B} = \frac{\mu_0}{4\pi} \frac{I d\mathbf{s} \times \hat{\mathbf{r}}}{r^2} \quad (30.1)$$

where  $\mu_0$  is a constant called the **permeability of free space**:

$$\mu_0 = 4\pi \times 10^{-7} \text{ T}\cdot\text{m/A} \quad (30.2)$$


To find the total magnetic field  $\mathbf{B}$  created at some point by a current of finite size, we must sum up contributions from all current elements  $I d\mathbf{s}$  that make up the current. That is, we must evaluate  $\mathbf{B}$  by integrating Equation 30.1

$$\vec{\mathbf{B}} = \frac{\mu_0}{4\pi} \int \frac{I d\vec{\mathbf{s}} \times \hat{\mathbf{r}}}{r^2}$$


## EXAMPLE 30.1


### Magnetic Field Surrounding a Thin, Straight Conductor

Consider a thin, straight wire carrying a constant current  $I$  and placed along the  $x$  axis as shown in Figure ... Determine the magnitude and direction of the magnetic field at point  $P$  due to this current

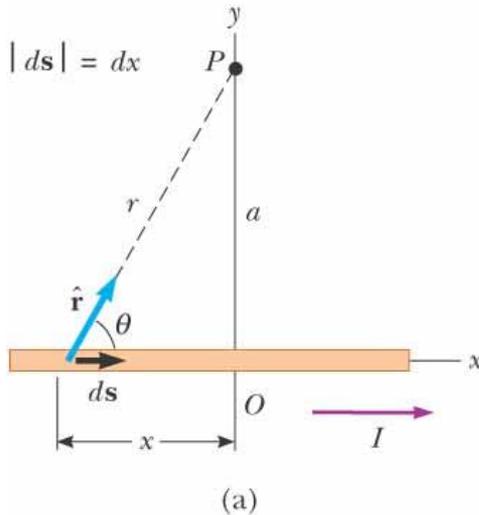



$$B = \frac{\mu_0 I}{2\pi a}$$


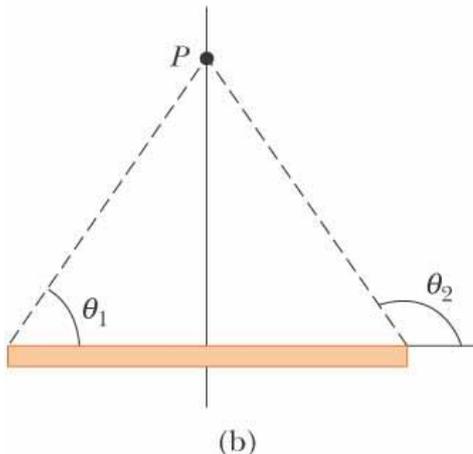


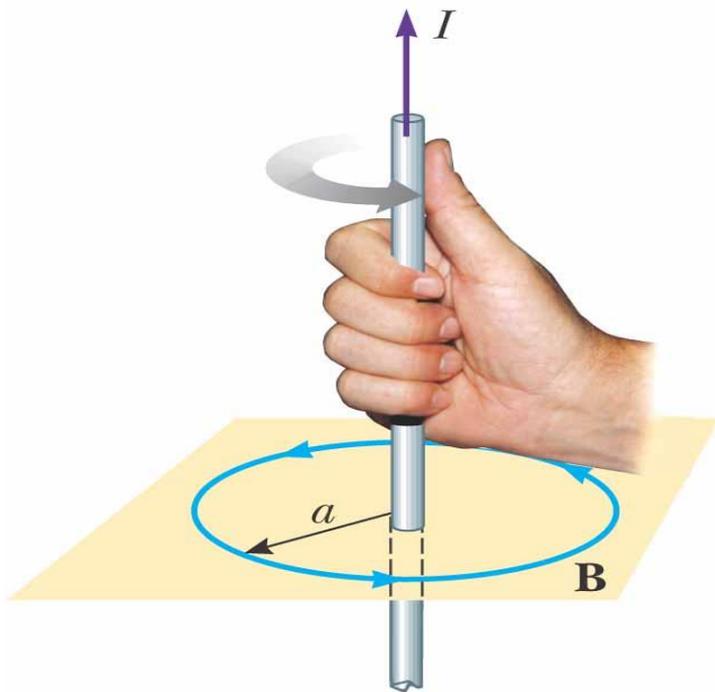

©2004 Thomson - Brooks/Cole

The right-hand rule for determining the direction of the magnetic field surrounding a long, straight wire carrying a current. Note that the magnetic field lines form circles around the wire.

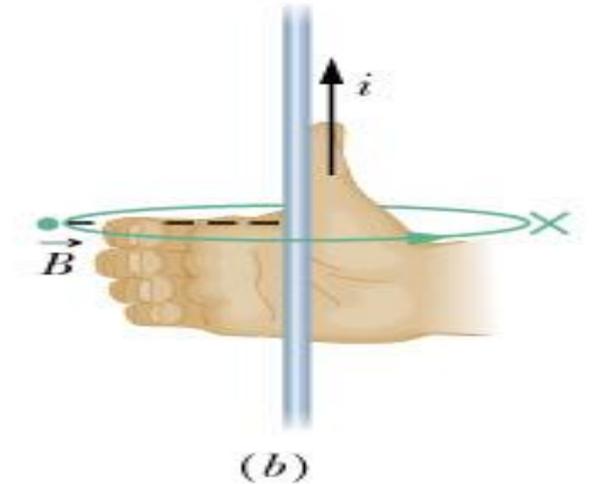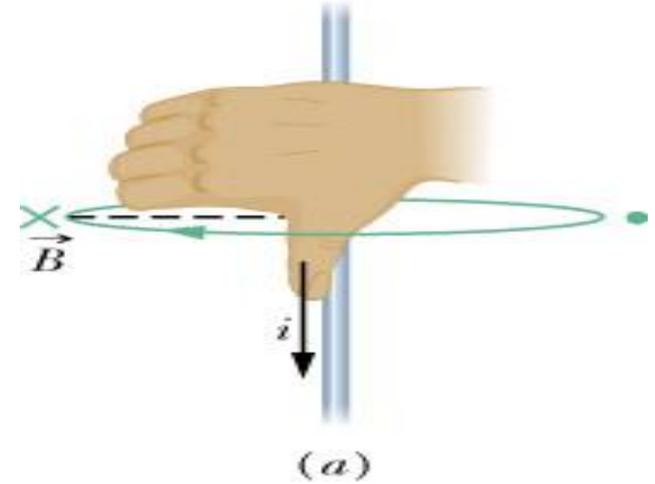

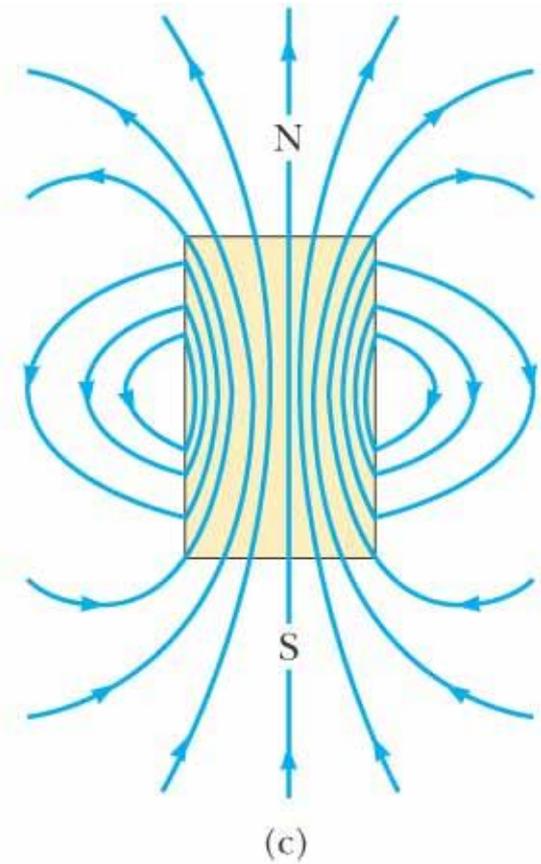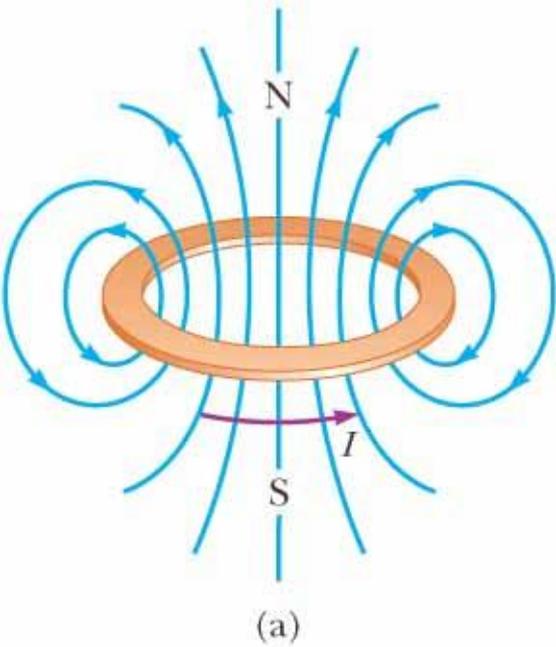

©2004 Thomson - Brooks/Cole

(a) Magnetic field lines surrounding a current loop. (b) Magnetic field lines surrounding a current loop, displayed with iron filings. (c) Magnetic field lines surrounding a bar magnet. Note the similarity between this line pattern and that of a current loop

**Example** A vertical electric wire in the wall of a building carries a current of 25 A upward. What is the magnetic field at a point 10 cm due north of this wire?


Let's make north be to the left in this picture, and up be up.

According to the right hand rule, the magnetic field is to the west, coming out of the plane of the "paper."

To calculate the magnitude, B:

$$B = \frac{\mu_0 I}{2\pi r}$$


$$B = \frac{4\pi \times 10^{-7} \frac{T \cdot m}{A} (25A)}{2\pi (0.1m)} = 5 \times 10^{-5} T$$

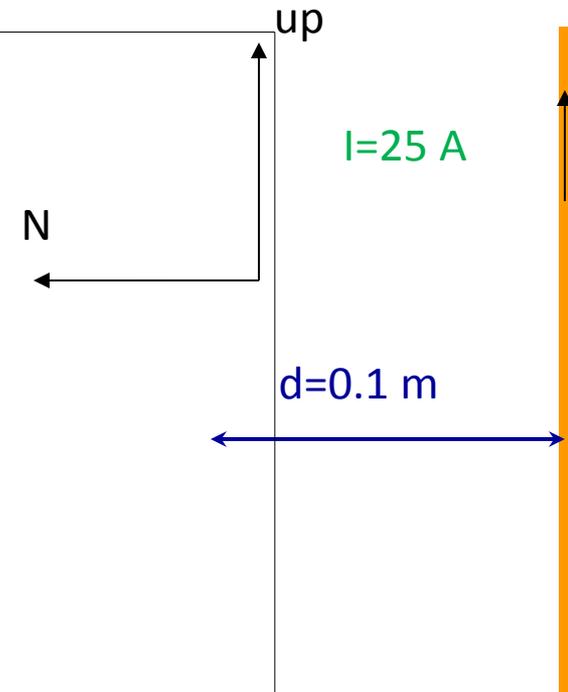

# example

Two infinitely long wires form the  $x$  and  $y$  axis of a 2D coordinate system. They each carry current as shown. What is the magnetic field at a point  $P$  (2.0 m, 2.0 m)?

- A.  $7 \times 10^{-7}$  T into the page
- B.  $7 \times 10^{-7}$  T out of the page
- C.  $1 \times 10^{-7}$  T into the page
- D.  $1 \times 10^{-7}$  T out of the page**
- E. 0

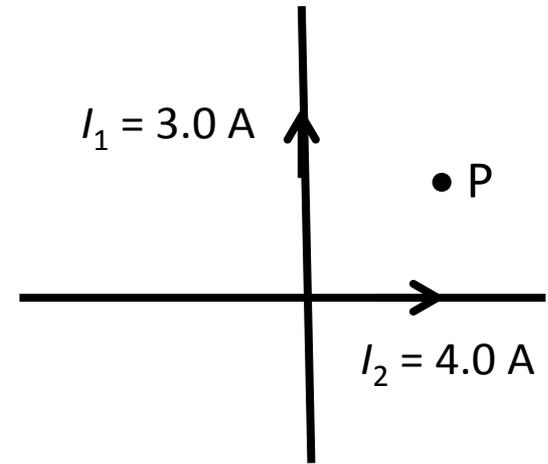

$$B_1 = \frac{\mu_0 (3 \text{ A})}{2\pi (2 \text{ m})} \text{ into the page}$$

$$B_2 = \frac{\mu_0 (4 \text{ A})}{2\pi (2 \text{ m})} \text{ out of the page}$$

$$\vec{B}_{\text{total}} = \vec{B}_1 + \vec{B}_2$$

$$B_{\text{total}} = \frac{\mu_0 (1 \text{ A})}{2\pi (2 \text{ m})} = 10^{-7} \text{ T out of the page}$$

## The Magnetic Field around a Wire

What is the magnetic field strength and direction  $1.0 \times 10^{-2}$  m from the centre of a wire with 1.0 A of current coming out of the page?

Given:  $R = 1.0 \times 10^{-2}$  m,  $I = 1.0$  A,  $B = ?$

$$B = \frac{\mu_0 I}{2\pi R}$$
$$= \frac{\left(4\pi \times 10^{-7} \frac{\text{T}\cdot\text{m}}{\text{A}}\right)(1.0 \text{ A})}{2\pi(1.0 \times 10^{-2} \text{ m})}$$


$$B = 2.0 \times 10^{-5} \text{ T}$$

The strength of the magnetic field is  $2.0 \times 10^{-5}$  T. Using RHR #1, the direction of the magnetic field is counterclockwise.

# 30.2 THE MAGNETIC FORCE BETWEEN TWO PARALLEL CONDUCTORS

Consider two long, straight, parallel wires separated by a distance  $a$  and carrying currents  $I_1$  and  $I_2$  in the same direction



We can determine the force exerted on one wire due to the magnetic field set up by the other wire.

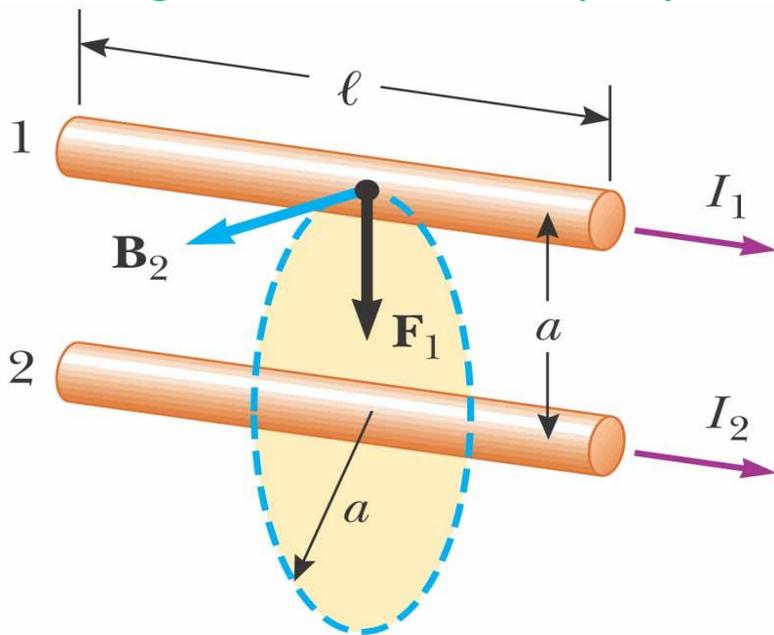

$$F_1 = I_1 \ell B_2 = I_1 \ell \left( \frac{\mu_0 I_2}{2\pi a} \right) = \frac{\mu_0 I_1 I_2}{2\pi a} \ell$$

RHR-  
 Fingers along B  
 Thumb along v  
 Palm shows F

parallel conductors carrying currents in the same direction attract each other, and parallel conductors carrying currents in opposite directions repel each other.

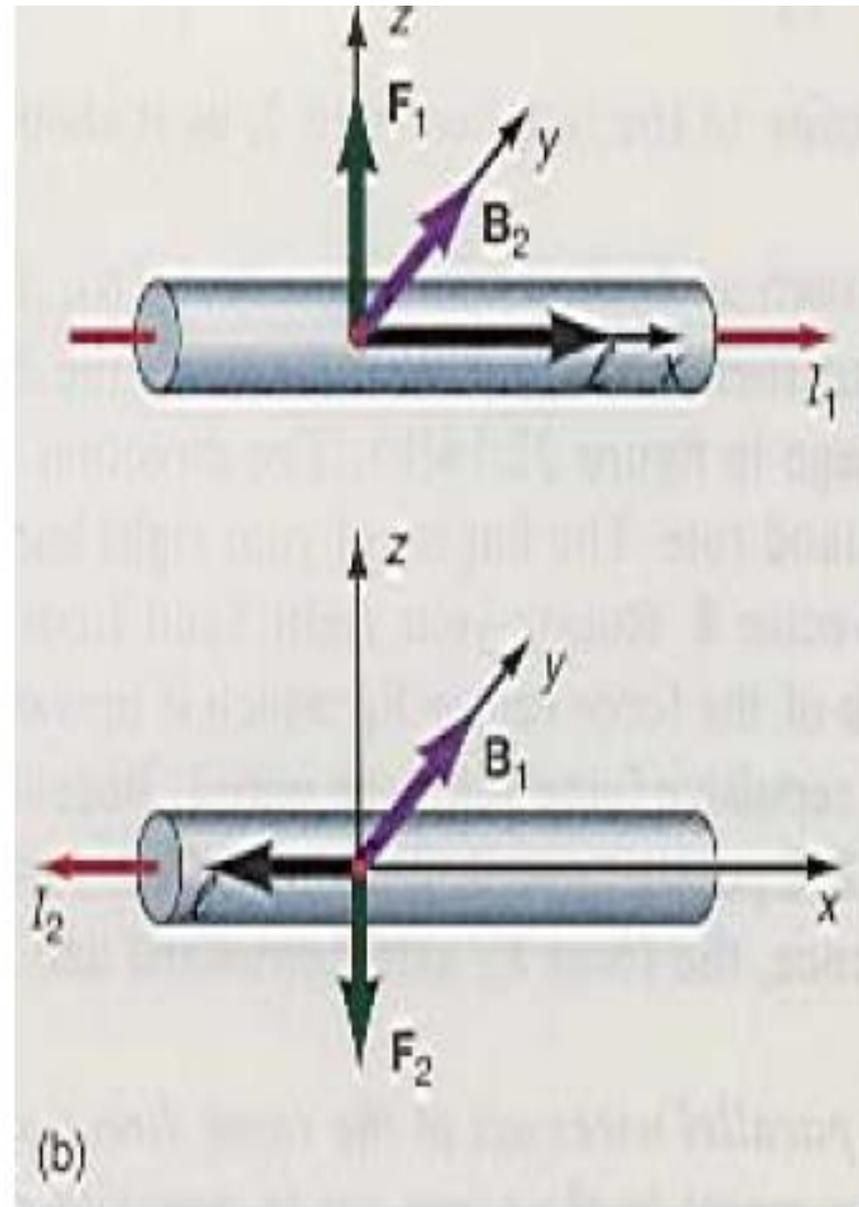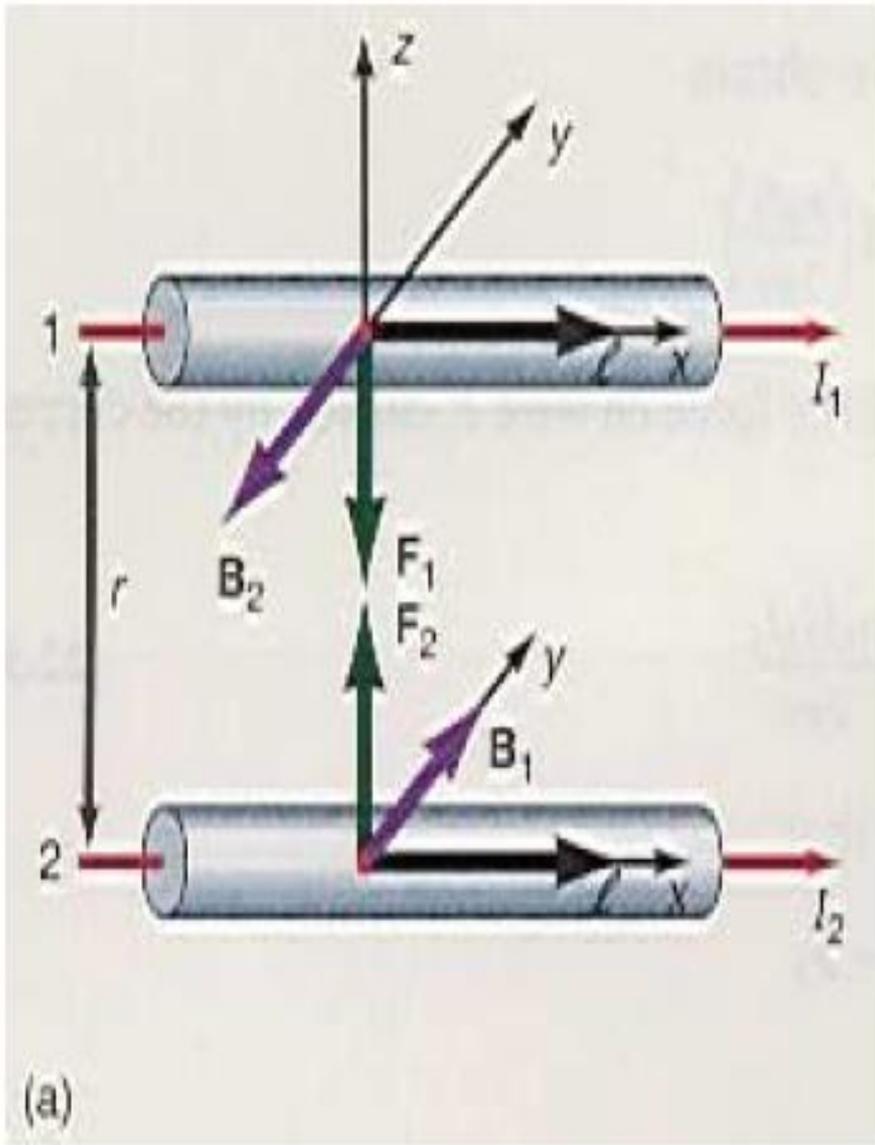



© 2004 Thomson - Brooks/Cole

Because the magnitudes of the forces are the same on both wires, we denote the magnitude of the magnetic force between the wires as simply  $F_B$ .

Force per unit length: 
$$\frac{F_B}{\ell} = \frac{\mu_0 I_1 I_2}{2\pi a}$$

### Definition of the Ampere

- When the magnitude of the force per unit length between two long parallel wires that carry identical currents and are separated by 1 m is  $2 \times 10^{-7}$  N/m, the current in each wire is defined to be 1 A

### Definition of the Coulomb

- The SI unit of charge, the **coulomb**, is defined in terms of the ampere
- When a conductor carries a steady current of 1 A, the quantity of charge that flows through a cross section of the conductor in 1 s is 1 C

## example


Two very long straight, parallel wires have currents  $I$  running through them as shown in the figure. The force on wire 2 due to wire 1 is:

A. Down

B. Up

C. Into the page

D. Out of the page

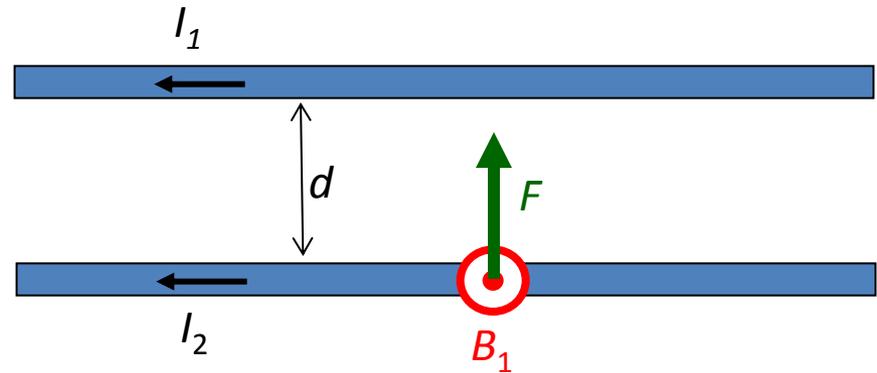

Magnetic field by 1 at location of wire 2 is out of the page.

Force on  $I_2$  by  $B_1$  is up.  $B_1 = \frac{\mu_0 I_1}{2\pi d}$  out of the page

Force for section of length  $L$ :  $F = I_2 L B_1$

or force per unit length:

$$\frac{F}{L} = \frac{\mu_0 I_1 I_2}{2\pi d}$$


Parallel currents: attraction

Antiparallel currents: repulsion

## 30.3 AMPERE'S LAW



Because the compass needles point in the direction of  $\mathbf{B}$ , we conclude that the lines of  $\mathbf{B}$  form circles around the wire,

the magnitude of  $\mathbf{B}$  is the same everywhere on a circular path centered on the wire and lying in a plane perpendicular to the wire. By varying the current and distance  $a$  from the wire, we find that  $\mathbf{B}$  is proportional to the current and inversely proportional to the distance from the wire,

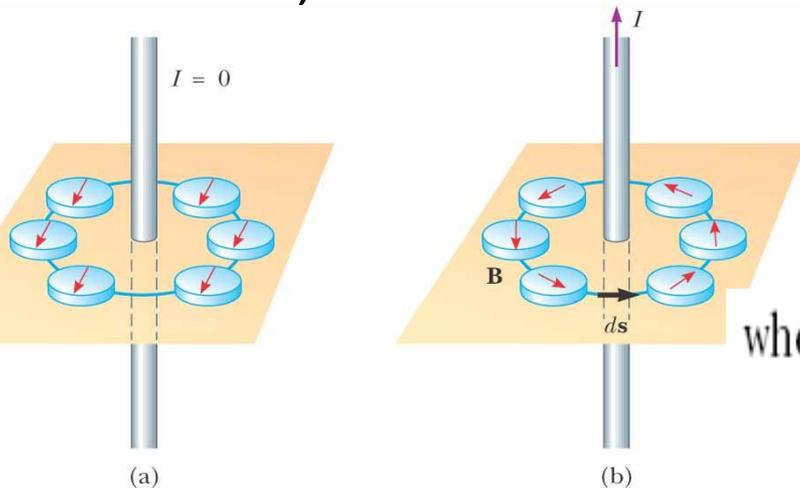

$$\oint \mathbf{B} \cdot d\mathbf{s} = B \oint ds = \frac{\mu_0 I}{2\pi r} (2\pi r) = \mu_0 I$$

where  $\oint ds = 2\pi r$  is the circumference of the circular path.

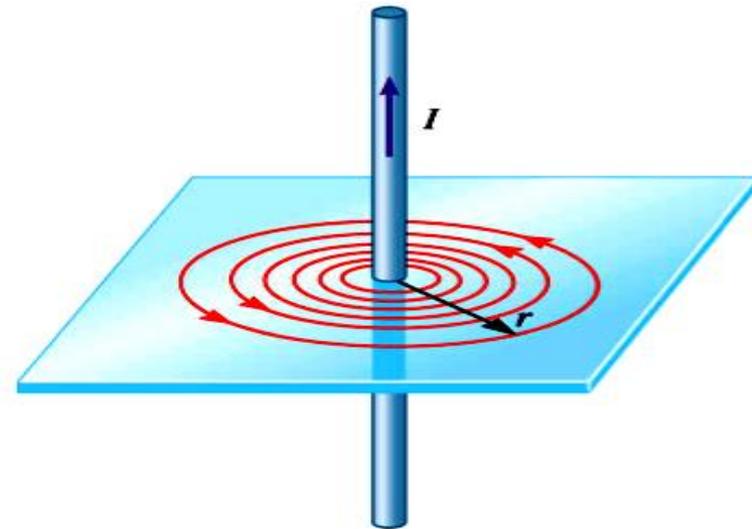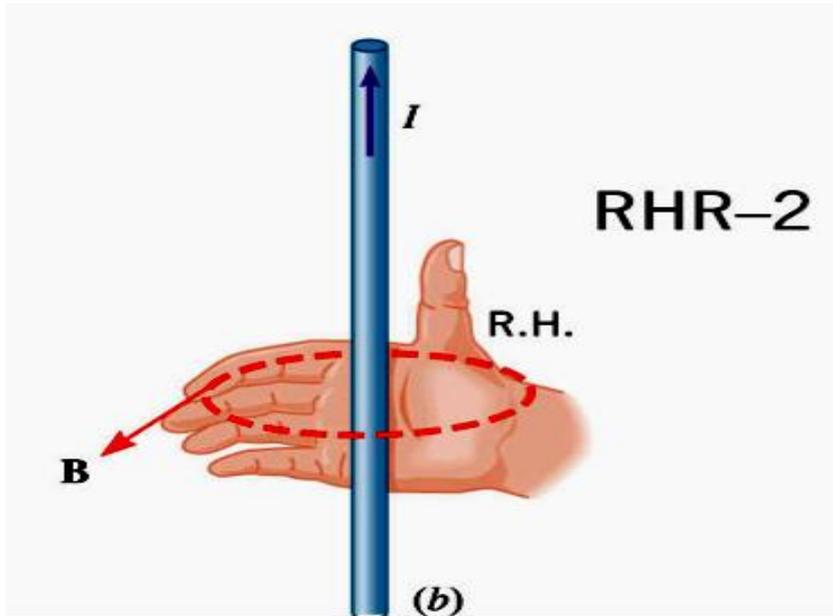

$$B \propto \frac{I}{r}$$

## Ampère's law


The line integral of  $\mathbf{B} \cdot d\mathbf{s}$  around any closed path equals  $\mu_0 I$ , where  $I$  is the total continuous current passing through any surface bounded by the closed path.

$$\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I \quad (30.13)$$

Ampere's law describes the creation of magnetic fields by all continuous current configurations, but at our mathematical level it is useful only for calculating the magnetic field of current configurations having a high degree of symmetry. Its use is similar to that of Gauss's law in calculating electric fields for highly symmetric charge distributions.


If your path includes more than one source of current, add all the currents (with correct sign).

$$\oint \vec{B} \cdot d\vec{s} = \mu_0 (I_1 - I_2)$$

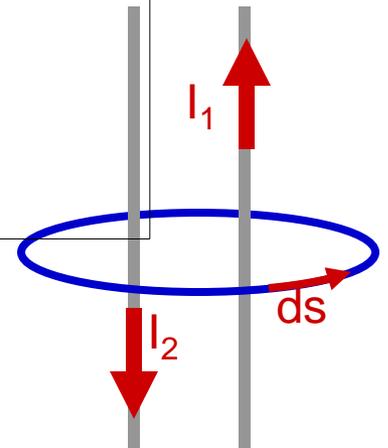

$I_4$  doesn't pass through the enclosed area.


The integration path is a closed curve.

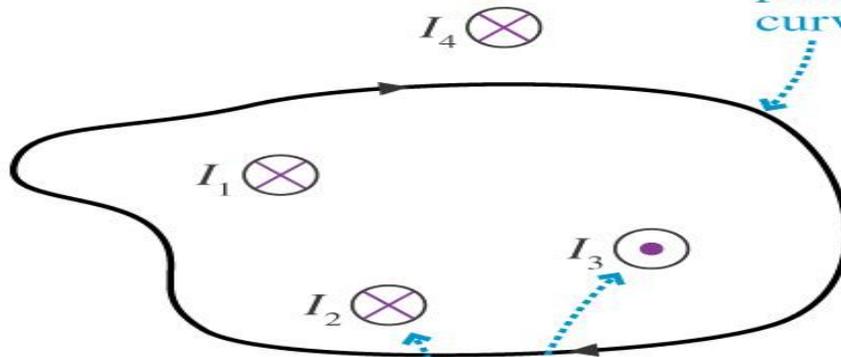


These currents pass through the bounded area, so  $I_{\text{through}} = I_1 + I_2 - I_3$ .

Copyright © 2004 Pearson Education, Inc., publishing as Addison Wesley

$$\sum_{\text{path}} \mathbf{B} \cdot d\mathbf{s} = 2\mu_0 I$$

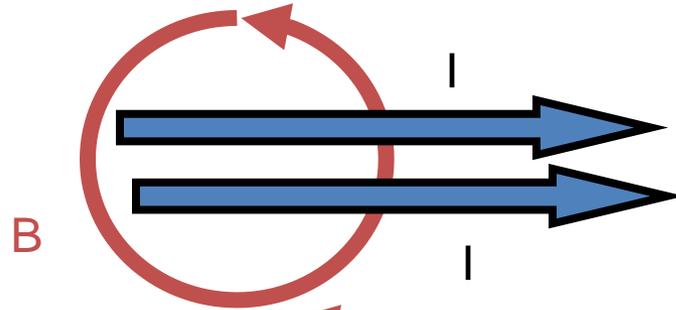


$$\sum_{\text{path}} \mathbf{B} \cdot d\mathbf{s} = 0$$

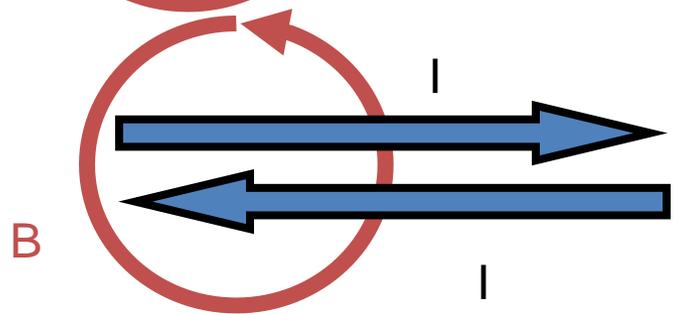

## Example:

What is the total current through the area bounded by the closed curve?

1 A into the page

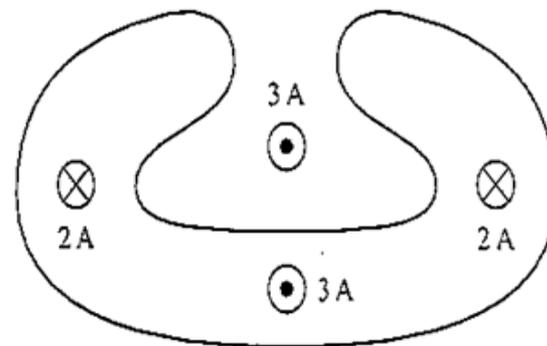


1.0 A

## Example:


The total current through the area bounded by the closed curve is 2 A. What are the size and direction of  $I_3$ ?

$I_3 = 3A$  into the page

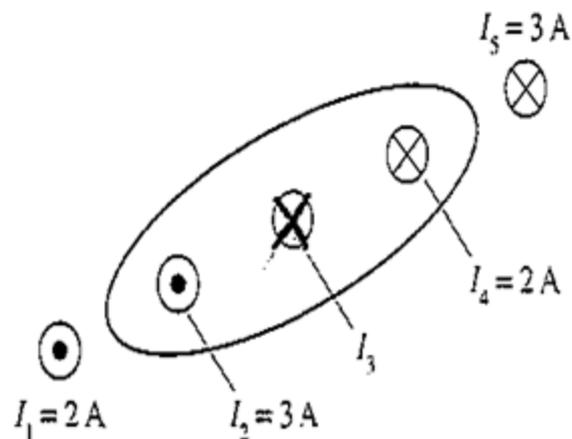

## Example:

Use Ampere's Law to find  $B$  near a very long, straight wire.  $B$  is independent of position along the wire and only depends on the distance from the wire (symmetry).

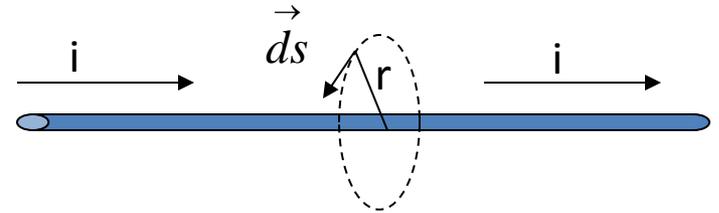

By symmetry  $\vec{B} \parallel \vec{ds}$

$$\oint \vec{B} \cdot \vec{ds} = \oint B ds = B \int ds = B 2\pi r = \mu_0 i$$

$$B = \frac{\mu_0 i}{2\pi r}$$

Suppos  $i = 10 \text{ A}$

e

$r = 10 \text{ cm}$


$$B = 2 \times 10^{-7} \times 10 \times 10^{-1}$$

$$B = 2 \times 10^{-7} \text{ T}$$

$$\mu_0 = 4\pi \times 10^{-7} \frac{\text{N}}{\text{A}^2}$$

## Example:

Draw the magnetic field vector at each dot.  
Show relative size with arrow length if possible:

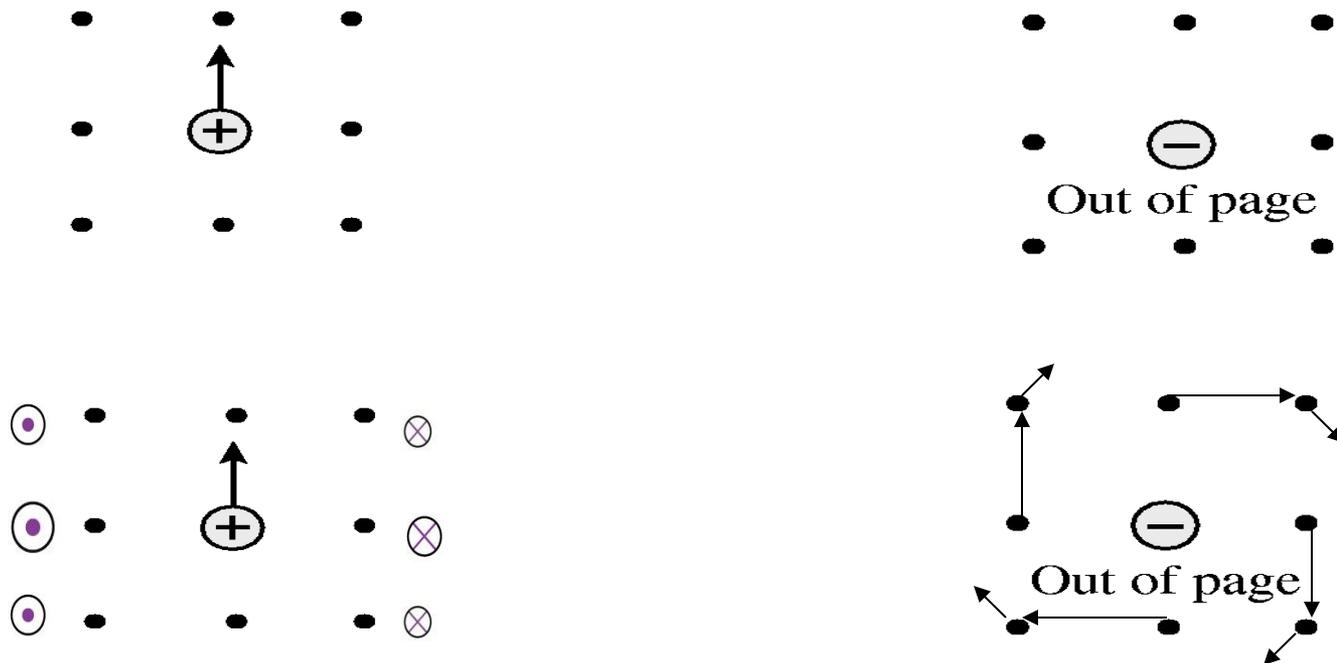


# Example

Interaction between current-carrying wires


2 parallel wires *A* & *B*, carry the same size of current.

- (a) Draw a few magnetic field lines due to the current through wire *A*.

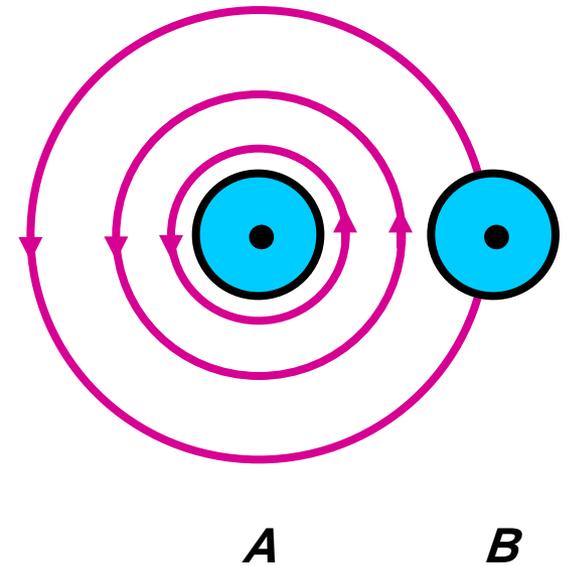

# Example


Interaction between current-carrying wires  
2 parallel wires  $A$  &  $B$ , carry the same size of current.

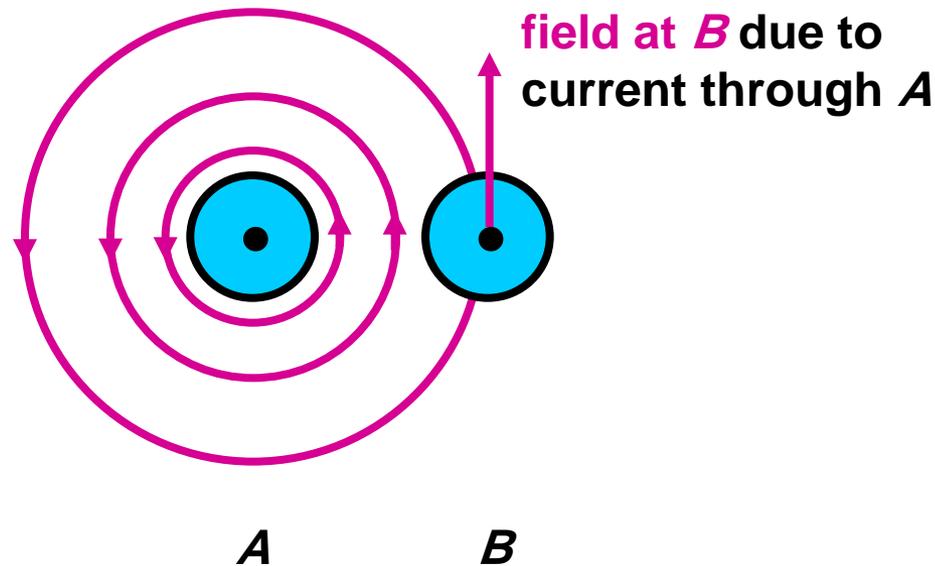

(b) Mark the **direction of this magnetic field** at wire  $B$  with an arrow.

# Example

Interaction between current-carrying wires  
2 parallel wires  $A$  &  $B$ , carry the same size of current.

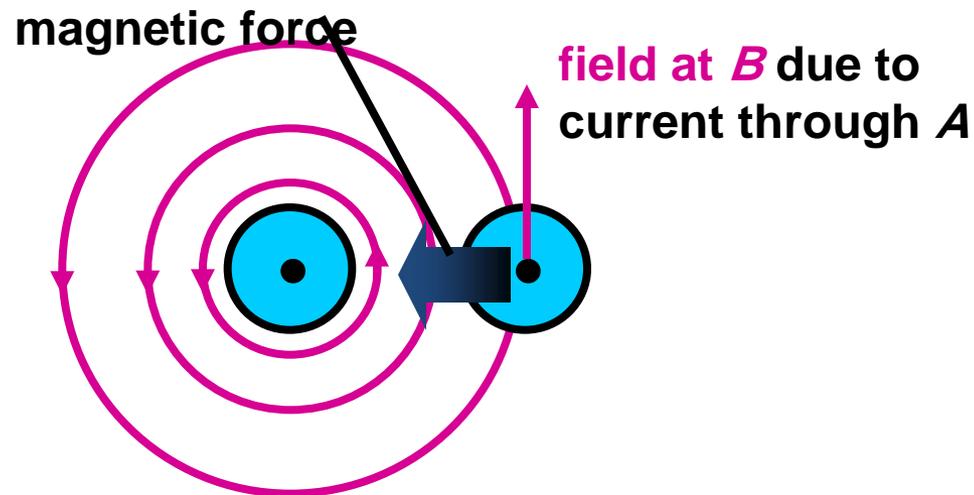


- (c) Mark the direction of magnetic force acting on  $B$  due to magnetic field of the current through  $A$ .

# Example

Interaction between current-carrying wires

2 parallel wires  $A$  &  $B$ , carry the same size of current.

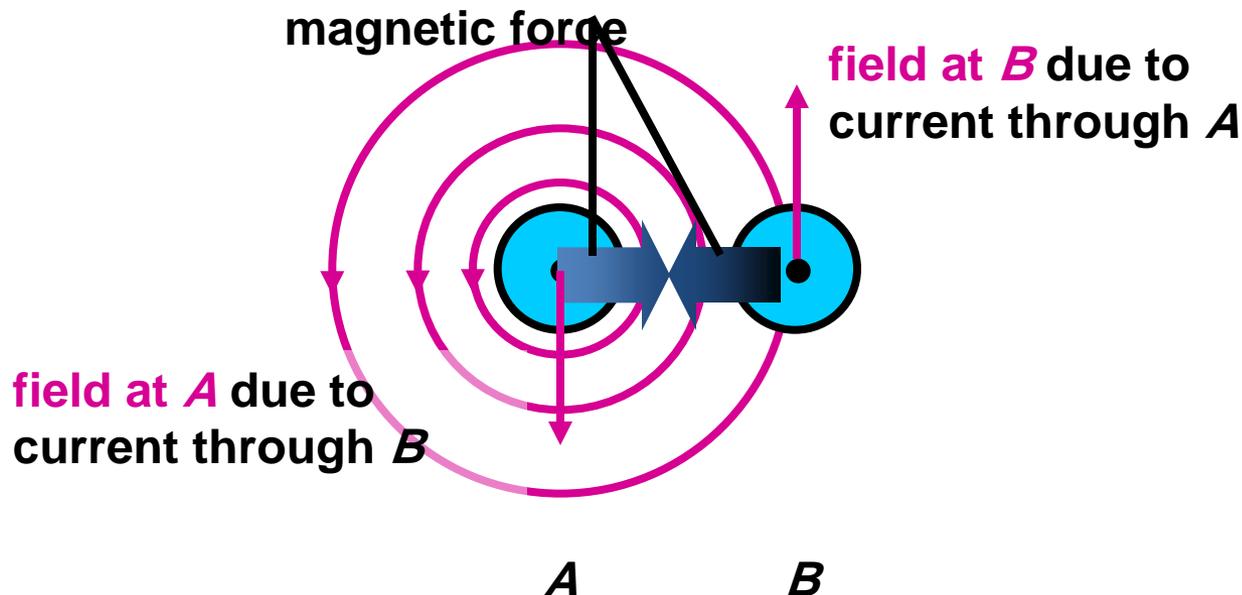


- (d) Deduce the direction of magnetic force acting on  $A$  due to magnetic field of the current through  $B$ .

# Example

Interaction between current-carrying wires

2 parallel wires  $A$  &  $B$ , carry same size of current.

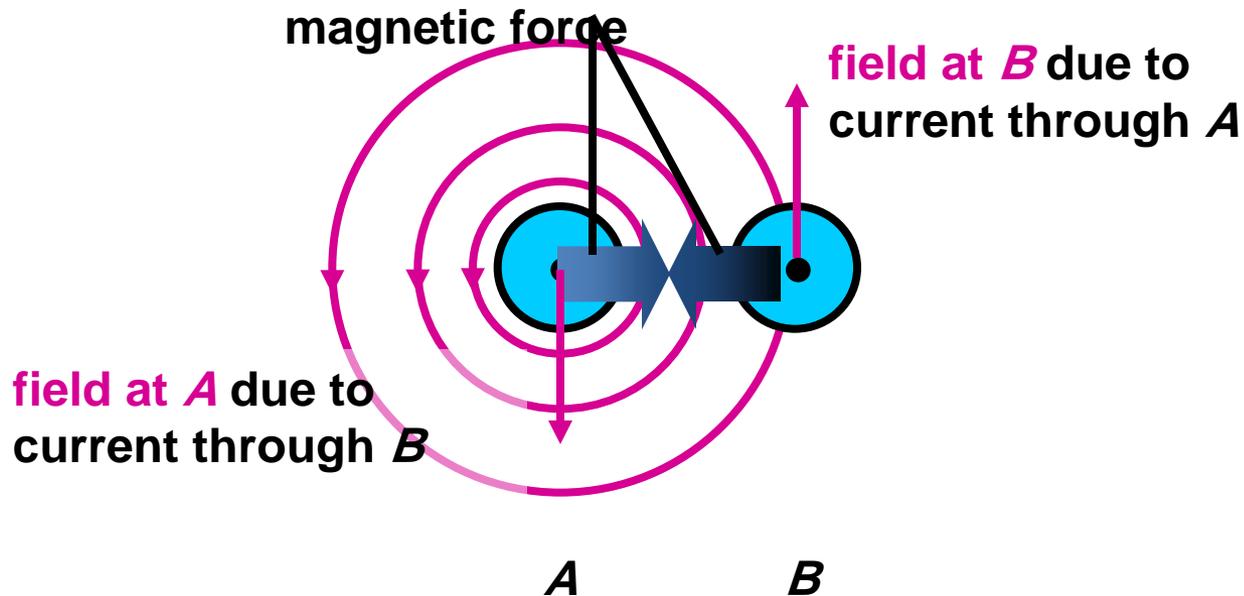

(e) Do  $A$  &  $B$  attract or repel each other?

They **attract** each other.


### EXAMPLE 30.4 The Magnetic Field Created by a Long Current-Carrying Wire

A long, straight wire of radius  $R$  carries a steady current  $I_0$  that is uniformly distributed through the cross-section of the wire (Fig. 30.11). Calculate the magnetic field a distance  $r$  from the center of the wire in the regions  $r \geq R$  and  $r < R$ .

Let us choose for our path of integration circle 1 in Figure ... From symmetry,  $B$  must be constant in magnitude and parallel to  $ds$  at every point on this circle. Because the total current passing through the plane of the circle is  $I_0$ , Ampère's law gives

$$\oint \mathbf{B} \cdot d\mathbf{s} = B \oint ds = B(2\pi r) = \mu_0 I_0$$

$$B = \frac{\mu_0 I_0}{2\pi r} \quad (\text{for } r \geq R)$$

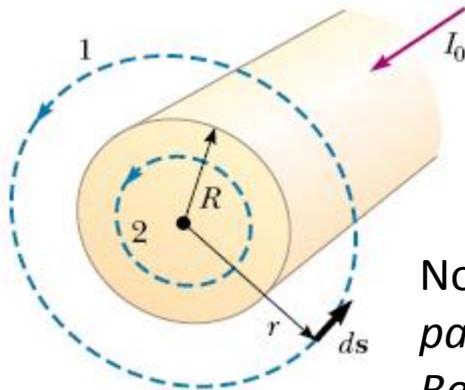

Now consider the interior of the wire, where  $r < R$ . Here the current  $I$  passing through the plane of circle 2 is less than the total current  $I_0$ . Because the current is uniform over the cross-section of the wire, the fraction of the current enclosed by circle 2 must equal the ratio of the area  $r^2$  enclosed by circle 2 to the cross-sectional area  $R^2$  of the wire:


$$\frac{I}{I_0} = \frac{\pi r^2}{\pi R^2}$$

$$I = \frac{r^2}{R^2} I_0$$

$$\oint \mathbf{B} \cdot d\mathbf{s} = B(2\pi r) = \mu_0 I = \mu_0 \left( \frac{r^2}{R^2} I_0 \right)$$

$$B = \left( \frac{\mu_0 I_0}{2\pi R^2} \right) r \quad (\text{for } r < R)$$

$$B = \frac{\mu_0 I_0}{2\pi r} \quad (\text{for } r \geq R)$$

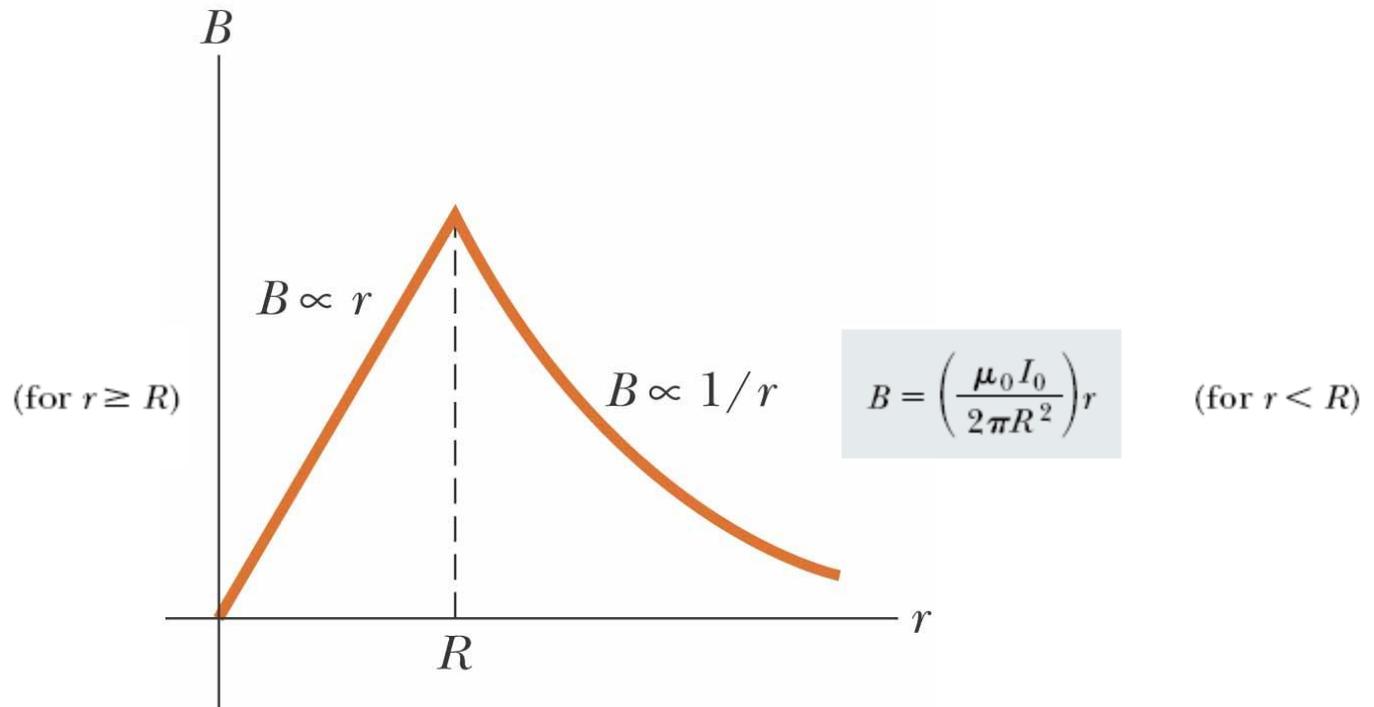

©2004 Thomson - Brooks/Cole

## 30.4 THE MAGNETIC FIELD OF A SOLENOID


➤ A solenoid is a long wire wound in the form of a helix. With this configuration, a reasonably uniform magnetic field can be produced in the space surrounded by the turns of wire—which we shall call the *interior of the solenoid*—when the solenoid carries a current.

\* The magnetic field lines for a loosely wound solenoid.

➤ the field lines in the interior are nearly parallel to one another, are uniformly distributed, and are close together, indicating that the field in this space is uniform and strong.




➤ The field lines between current elements on two adjacent turns tend to cancel each other because the field vectors from the two elements are in opposite directions.

➤ The field at exterior points such as  $P$  is *weak because* the field due to current elements on the right-hand portion of a turn tends to cancel the field due to current elements on the left-hand portion.

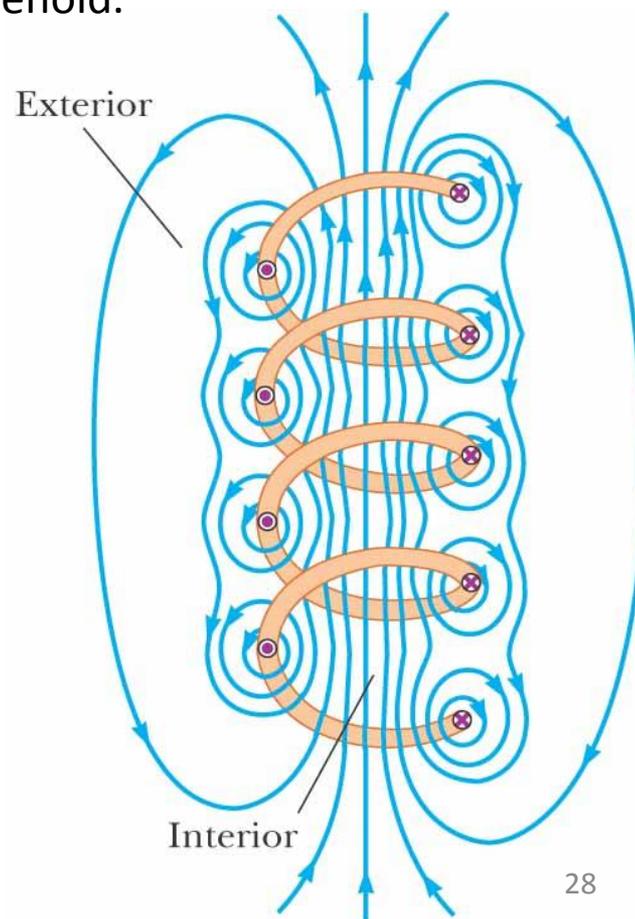


❑ Magnetic field lines for a tightly wound solenoid of finite length, carrying a steady current

➤ The field at exterior points such as *P* is weak because the field due to current elements on the right-hand portion of a turn tends to cancel the field due to current elements on the left-hand portion.

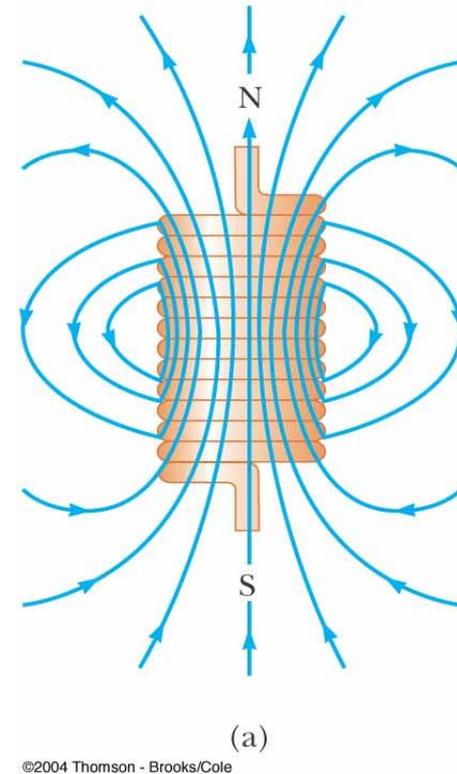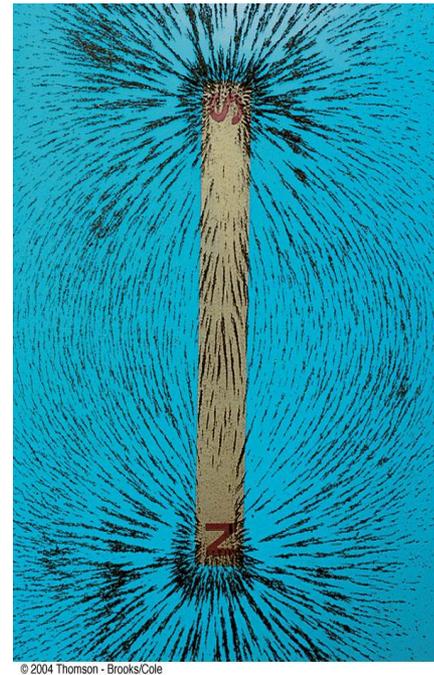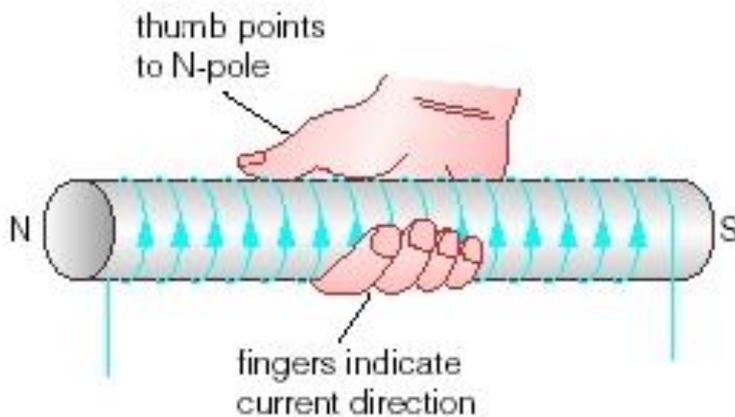


The magnetic field pattern of a bar magnet, displayed with small iron filings on a sheet of paper.

An *ideal solenoid* is approached when the turns are closely spaced and the length is much greater than the radius of the turns. In this case, the external field is zero, and the interior field is uniform over a great volume.

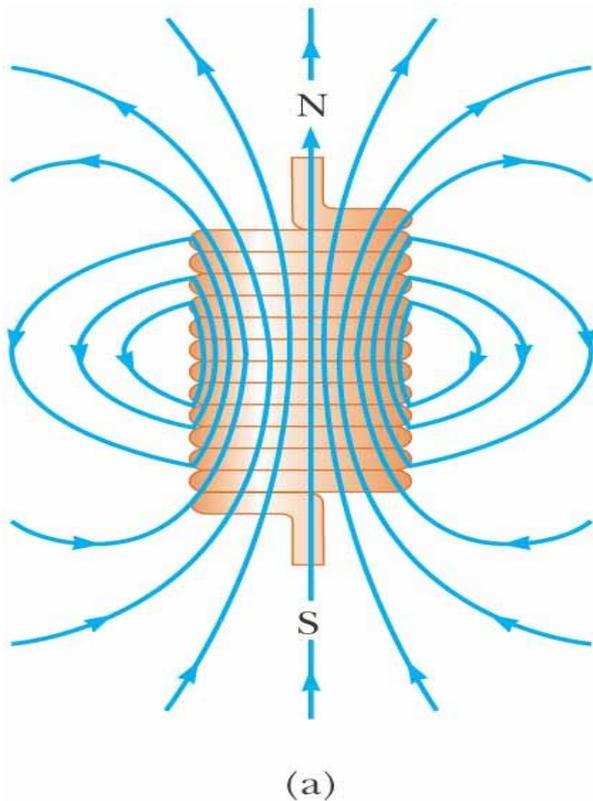

©2004 Thomson - Brooks/Cole

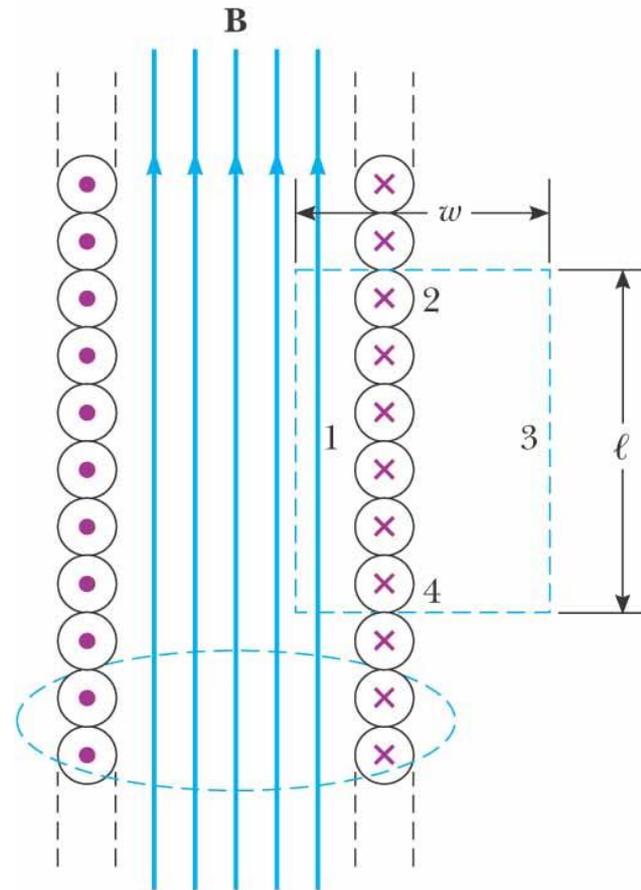

©2004 Thomson - Brooks/Cole

Because the solenoid is ideal,  $B$  in the interior space is uniform and parallel to the axis, and  $B$  in the exterior space is zero.

Consider the rectangular path of length  $l$  and width  $w$  shown in Figure.... We can apply Ampere's law to this path by evaluating the integral of  $B \cdot ds$  over each side of the rectangle.

$$\oint \vec{B} \cdot \vec{ds} = \int_1 \vec{B} \cdot \vec{ds} + \int_2 \vec{B} \cdot \vec{ds} + \int_3 \vec{B} \cdot \vec{ds} + \int_4 \vec{B} \cdot \vec{ds}$$

$$\oint \vec{B} \cdot \vec{ds} = Bl + 0 + 0 + 0 = \mu_0 I_{enclosed}$$


$$Bl = \mu_0 NI$$

$$n = \frac{N}{l}$$

$$B = \mu_0 \frac{N}{l} I = \mu_0 nI$$

$N$  is the number of turns enclosed by our surface

$n = N/L$  is the number of turns per unit length

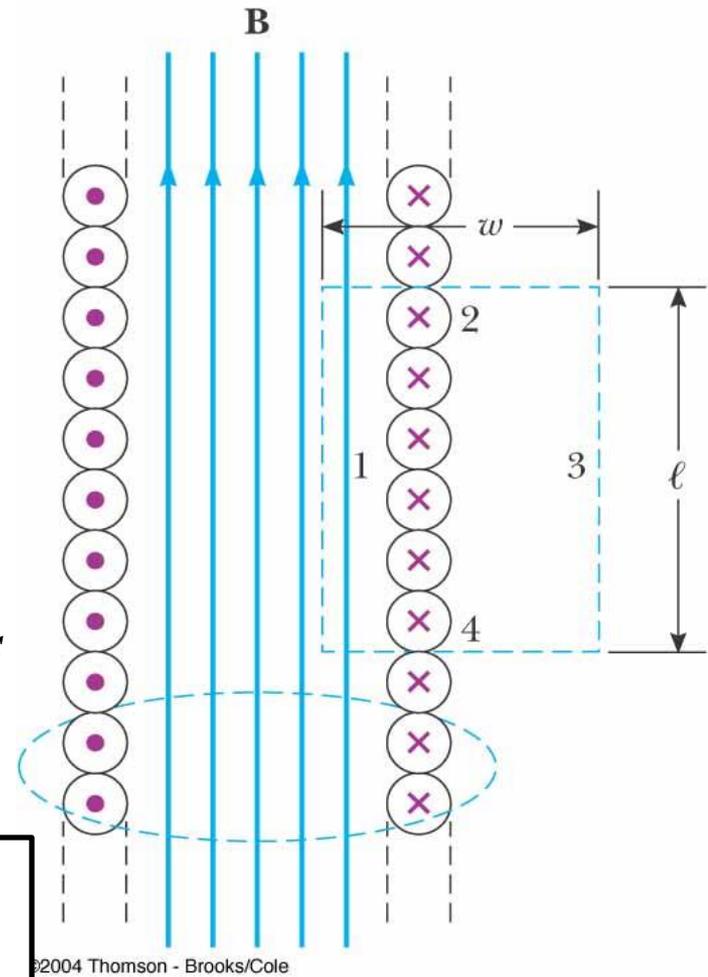


$$B = \mu_0 \frac{N}{\ell} I = \mu_0 n I$$

valid only for points near the center (that is, far from the ends) of a very long solenoid.

If the radius  $r$  of the torus in Figure 30.13 containing  $N$  turns is much greater than the toroid's cross-sectional radius  $a$ , a short section of the toroid approximates a solenoid for which

$$n = N/2\pi r.$$

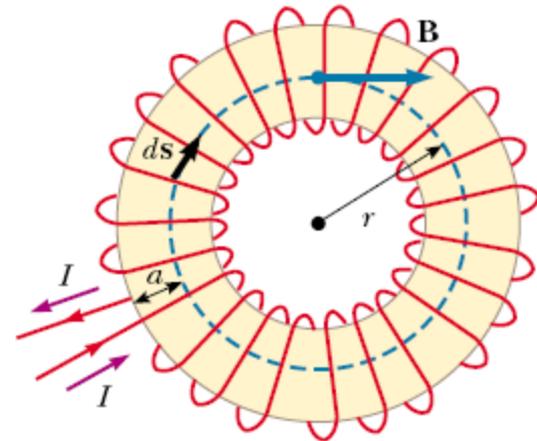

## Example:

a thin 10-cm long solenoid has a total of 400 turns of wire and carries a current of 2 A. Calculate the magnetic field inside near the center.

$$B = \mu_0 \frac{N}{\ell} I$$

$$B = \left( 4\pi \times 10^{-7} \frac{\text{T} \cdot \text{m}}{\text{A}} \right) \frac{(400)}{(0.1 \text{ m})} (2 \text{ A})$$

$$\boxed{B = 0.01 \text{ T}}$$

## example

A 10 cm long solenoid has a total of 400 turns of wire and carries a current of 2.0 A. Calculate the magnetic field inside the solenoid

$$n = 400 \text{ turns}/0.10 \text{ m} = 4000 \text{ m}^{-1}$$

$$B = \mu_0 n I$$

$$B = (4\pi \times 10^{-7} \text{ T m/A})(4000 \text{ m}^{-1})(2.0 \text{ A})$$

$$\mathbf{B = 0.01 \text{ T}}$$

## Example:

A solenoid 20 cm long and 4 cm in diameter is wound with a total of 200 turns of wire. The solenoid is aligned with its axis parallel to the earth's magnetic field which is  $3 \times 10^{-5} \text{ T}$  in magnitude. What should the current in the solenoid be in order for its field to exactly cancel the earth's field inside the solenoid?

*Solution:* Since  $l=0.2 \text{ m}$  and  $N=200$  turns,  $B=N\mu_0 I/l$

$$I=Bl/\mu_0 N=(3 \times 10^{-5} \text{ T})(0.2)/(4\pi \times 10^{-7} \text{ Tm/A})(200)=0.024 \text{ A}=24 \text{ mA}$$

The solenoid diameter has no significance except as a check that the solenoid is long relative to its diameter.

# example

A 0.100 T magnetic field is required. A student makes a solenoid of length 10.0 cm. Calculate how many turns are required if the wire is to carry 10.0 A.

$$B = \mu_0 \frac{N}{L} I$$

$$N = \frac{BL}{\mu_0 I} = \frac{0.1 \times 10 \times 10^{-2}}{4\pi \times 10^{-7} \times 10}$$

**T**

# 30.5 MAGNETIC FLUX

**Magnetic Flux,  $\Phi$** : The number of magnetic (flux) field lines which pass through a given cross-sectional area  $A$

Consider the special case of a plane of area  $A$  in a uniform field  $B$  that makes an angle  $\theta$  with  $dA$ . The magnetic flux through the plane in this case is

$$\Phi = \int \vec{B} \cdot d\vec{A}$$

for constant  $B$  and  $A$

$$\Phi = BA \cos \theta$$

Units:


$\Phi$  webers

$B$  Tesla

$A$  area  $m^2$

$\theta$  angle formed between  $B$  and the normal to the loop (area vector  $A$ )

The area vector  $A$  is perpendicular to the surface  $A$  and has a magnitude equal to the area  $A$ .

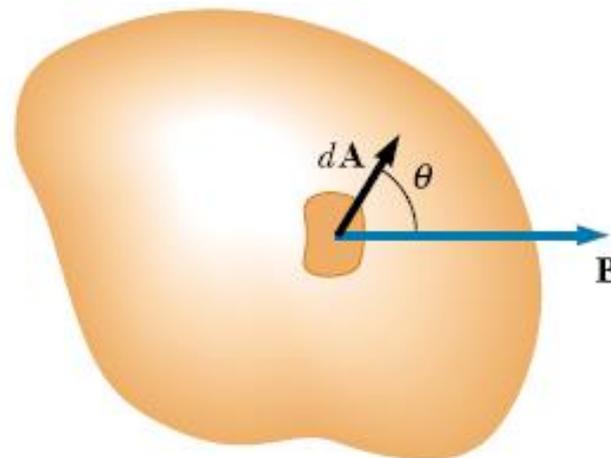


Hint:  $\theta$  is the angle formed between  $B$  and the normal to the loop.

## When $B$ is along the plane of the loop?

$$\Phi = B A \cos \theta$$

$$\theta = 90^\circ$$

$$\Phi = 0$$

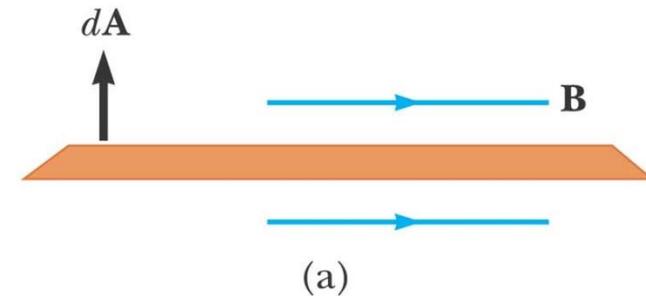


## When $B$ is perpendicular to the loop?

$$\Phi = B A \cos \theta$$

$$\theta = 0^\circ$$

$$\Phi = B A$$

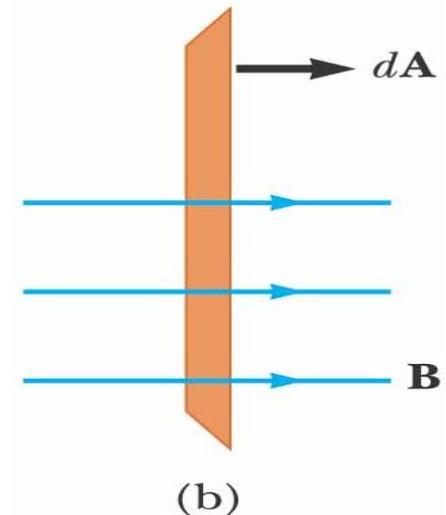

*Example:*

Which has the largest magnetic flux?

Answer: A


### EXAMPLE 30.8 Magnetic Flux Through a Rectangular Loop

A rectangular loop of width  $a$  and length  $b$  is located near a long wire carrying a current  $I$  (Fig. 30.21). The distance between the wire and the closest side of the loop is  $c$ . The wire is parallel to the long side of the loop. Find the total magnetic flux through the loop due to the current in the wire.

$$B = \frac{\mu_0 I}{2\pi r}$$

Because  $B$  is parallel to  $dA$  at any point within the loop, the magnetic flux through an area element  $dA$  is

$$\Phi_B = \int B dA = \int \frac{\mu_0 I}{2\pi r} dA$$

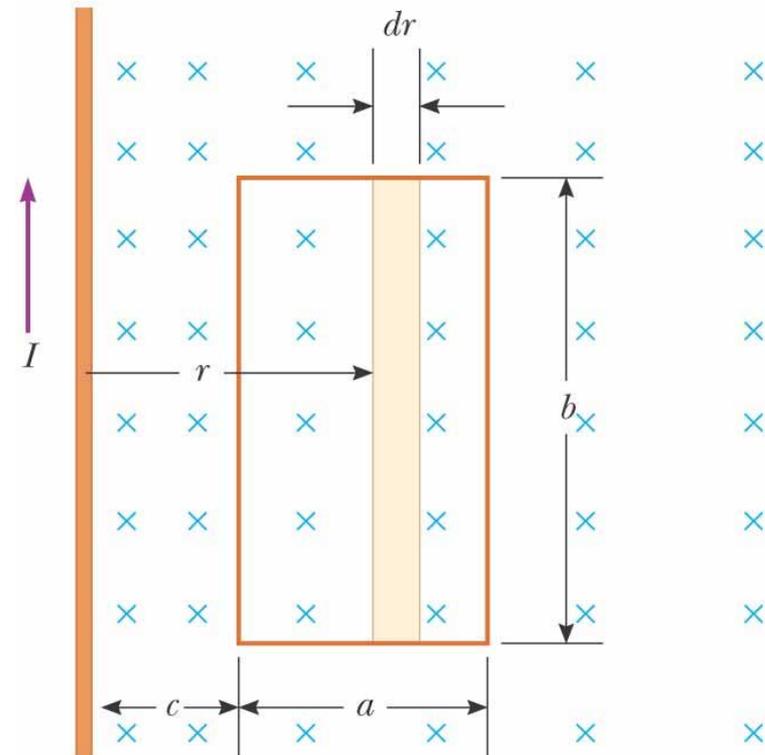


To integrate, we first express the area element (the tan region in Fig. 30.21) as  $dA = b dr$ . Because  $r$  is now the only variable in the integral, we have

$$\begin{aligned}\Phi_B &= \frac{\mu_0 I b}{2\pi} \int_c^{a+c} \frac{dr}{r} = \frac{\mu_0 I b}{2\pi} \ln r \Big|_c^{a+c} \\ &= \frac{\mu_0 I b}{2\pi} \ln\left(\frac{a+c}{c}\right) = \frac{\mu_0 I b}{2\pi} \ln\left(1 + \frac{a}{c}\right)\end{aligned}$$

## 30.6 GAUSS'S LAW IN MAGNETISM

In Chapter 24 we found that the electric flux through a closed surface surrounding a net charge is proportional to that charge (Gauss's law). In other words, the number of electric field lines leaving the surface depends only on the net charge within it. This property is based on the fact that electric field lines originate and terminate on electric charges.

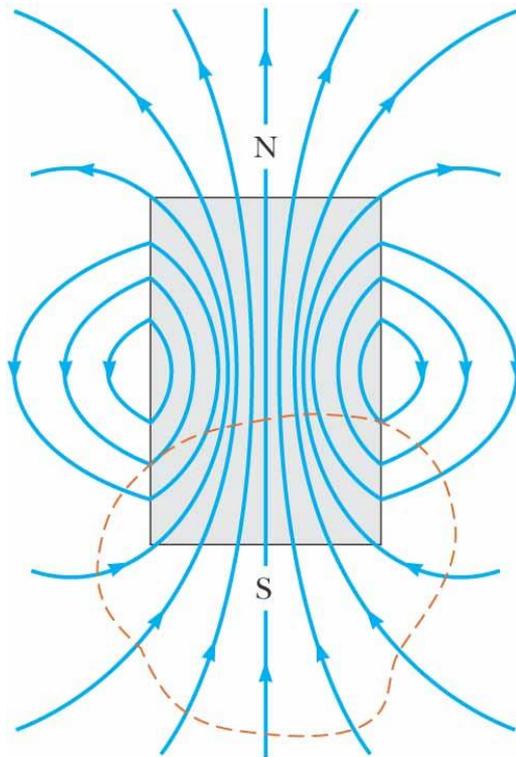


©2004 Thomson - Brooks/Cole

The situation is quite different for magnetic fields, which are continuous and form closed loops


**Gauss's law in magnetism** states that

the net magnetic flux through any closed surface is always zero:

$$\oint \mathbf{B} \cdot d\mathbf{A} = 0$$

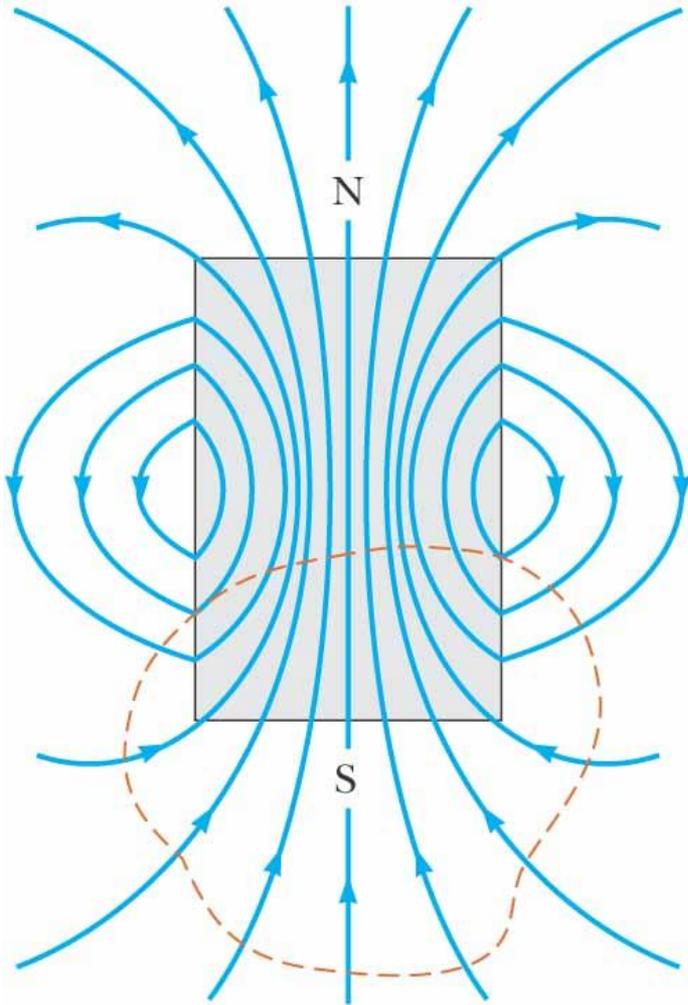

©2004 Thomson - Brooks/Cole

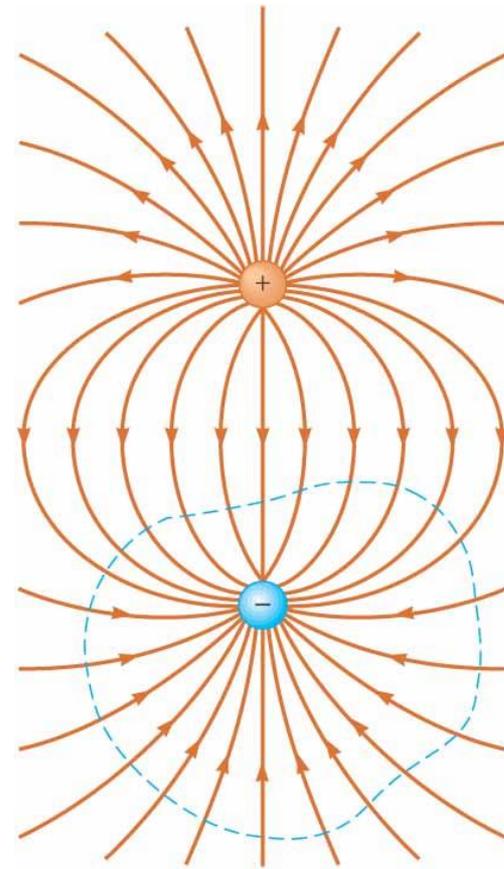

©2004 Thomson - Brooks/Cole

---

## SUMMARY

The **Biot–Savart law** says that the magnetic field  $d\mathbf{B}$  at a point  $P$  due to a length element  $d\mathbf{s}$  that carries a steady current  $I$  is

$$d\mathbf{B} = \frac{\mu_0}{4\pi} \frac{I d\mathbf{s} \times \hat{\mathbf{r}}}{r^2} \quad (30.1)$$

where  $\mu_0 = 4\pi \times 10^{-7} \text{ T}\cdot\text{m/A}$  is the **permeability of free space**,  $r$  is the distance from the element to the point  $P$ , and  $\hat{\mathbf{r}}$  is a unit vector pointing from  $d\mathbf{s}$  to point  $P$ . We find the total field at  $P$  by integrating this expression over the entire current distribution.

The magnetic field at a distance  $a$  from a long, straight wire carrying an electric current  $I$  is

$$B = \frac{\mu_0 I}{2\pi a} \quad (30.5)$$

The field lines are circles concentric with the wire.

The magnetic force per unit length between two parallel wires separated by a distance  $a$  and carrying currents  $I_1$  and  $I_2$  has a magnitude

$$\frac{F_B}{\ell} = \frac{\mu_0 I_1 I_2}{2\pi a} \quad (30.12)$$

The force is attractive if the currents are in the same direction and repulsive if they are in opposite directions.

**Ampère's law** says that the line integral of  $\mathbf{B} \cdot d\mathbf{s}$  around any closed path equals  $\mu_0 I$ , where  $I$  is the total steady current passing through any surface bounded by the closed path:

$$\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I \quad (30.13)$$

Using Ampère's law, one finds that the fields inside a toroid and solenoid are

$$B = \frac{\mu_0 NI}{2\pi r} \quad (\text{toroid}) \quad (30.16)$$

$$B = \mu_0 \frac{N}{\ell} I = \mu_0 n I \quad (\text{solenoid}) \quad (30.17)$$

where  $N$  is the total number of turns.

The **magnetic flux**  $\Phi_B$  through a surface is defined by the surface integral

$$\Phi_B \equiv \int \mathbf{B} \cdot d\mathbf{A} \quad (30.18)$$

**Gauss's law of magnetism** states that the net magnetic flux through any closed surface is zero.

$$B = \frac{\mu_0 I}{2\pi r}$$

long straight wire

use Ampere's law (or note the lack of N)

$$B = \frac{\mu_0 N I}{2a}$$

center of N loops of radius a

probably not a starting equation

$$B = \mu_0 \frac{N}{\ell} I$$

solenoid, length  $\ell$ , N turns

field inside a solenoid is constant

$$B = \mu_0 n I$$

solenoid, n turns per unit length

field inside a solenoid is constant

$$B = \frac{\mu_0 N I}{2\pi r}$$

toroid, N loops

field inside a toroid depends on position (r)

## *Example:*

A superconducting wire carries a current of  $10^4$  A. Find the magnetic field at a distance of 1.0 m from the wire. ( $\mu_0 = 4\pi \times 10^{-7}$  A-m/T)

1.  $2.0 \times 10^{-3}$  T
2.  $8.0 \times 10^{-3}$  T
3.  $1.6 \times 10^{-2}$  T
4.  $3.2 \times 10^{-2}$  T

## *Example:*

A 2.0 m wire segment carrying a current of 0.60 A oriented parallel to a uniform magnetic field of 0.50 T experiences a force of what magnitude?

- A. 6.7 N
- B. 0.30 N
- C. 0.15 N
- D. zero

## *Example:*

**A proton moving with a speed of  $3 \times 10^5$  m/s perpendicular to a uniform magnetic field of 0.20 T will follow which of the paths described below? ( $q_e = 1.6 \times 10^{-19}$  C and  $m_p = 1.67 \times 10^{-27}$  kg)**

1. a straight line path
2. a circular path of 1.5 cm radius
3. a circular path of 3.0 cm radius
4. a circular path of 0.75 cm radius

## *Example:*

A proton which moves perpendicular to a magnetic field of 1.2 T in a circular path of 0.08 m radius, has what speed? ( $q_p = 1.6 \times 10^{-19}$  C and  $m_p = 1.67 \times 10^{-27}$  kg)

- A)  $3.4 \times 10^6$  m/s
- B)  $4.6 \times 10^6$  m/s
- C)  $9.6 \times 10^6$  m/s
- D)  $9.2 \times 10^6$  m/s

## *Example:*

A horizontal wire of length 3.0 m carries a current of 6.0 A and is oriented so that the current direction is  $50^\circ$  S of W. The horizontal component of the earth's magnetic field is due north at this point and has a strength of  $0.14 \times 10^{-4}$  T. What is the size of the force on the wire?

a)  $0.28 \times 10^{-4}$  N

b)  $2.5 \times 10^{-4}$  N

c)  $1.9 \times 10^{-4}$  N

d)  $1.6 \times 10^{-4}$  N

# Homework

1- The magnetic field of a long, straight wire. A long straight wire is carrying a current of 15.0 A. Find the magnetic field 30.0 cm from the wire.

2- Force on parallel conducting wires. Two straight parallel conductors 30.0 cm long are separated by a distance of 10.0 cm. If one carries a current of 5.00 A to the right while the second carries a current of 7.00 A to the left, find the force on the first wire.

3- Magnetic field inside a solenoid. A solenoid 15.0 cm long is composed of 300 turns of wire. If there is a current of 5.00 A in the wire, what is the magnetic field inside the solenoid?

4- A magnetic field of  $5.00 \times 10^{-2}$  T passes through a plane 25.0 cm by 35.0 cm at an angle of 40.00 to the normal. Find the magnetic flux  $\Phi_M$  passing through the plane.

5- Two long, parallel conductors, separated by  $r = 10.0$  cm, carry current in the same direction. The first wire carries current  $I_1 = 5.00$  A, and the second carries  $I_2 = 8.00$  A. (a) What is the magnitude of the magnetic field  $B_1$  created by  $I_1$  at the location of  $I_2$ ?

(b) What is the force per unit length exerted by  $I_1$  on  $I_2$ ? (c) What is the magnitude of the magnetic field  $B_2$  created by  $I_2$  at the location of  $I_1$ ? (d) What is the force per unit length exerted by  $I_2$  on  $I_1$ ?


**5- Example:** Find values of  $\oint \vec{B} \cdot d\vec{s}$ .

a.  $\oint \vec{B} \cdot d\vec{s} =$

b.  $\oint \vec{B} \cdot d\vec{s} =$


c.  $\oint \vec{B} \cdot d\vec{s} =$

d.  $\oint \vec{B} \cdot d\vec{s} =$

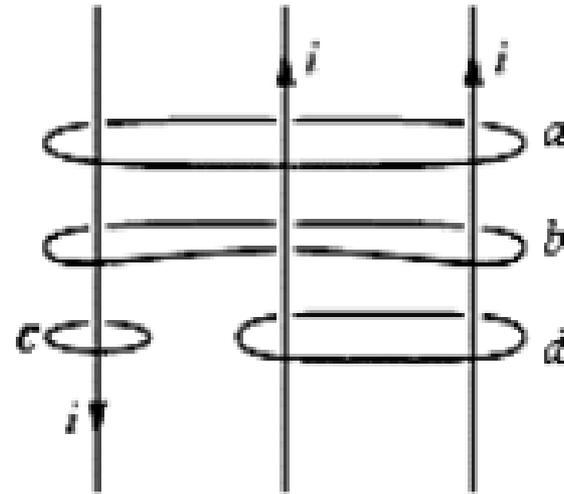


**6-** Calculate the magnitude of  $B$   $4\text{ cm}$  from *a long*, straight wire carrying a current of  $5.0\text{ A}$ .

7- Figure P30.23 is a cross-sectional view of a coaxial cable. The center conductor is surrounded by a rubber layer, which is surrounded by an outer conductor, which is surrounded by another rubber layer. In a particular application, the current in the inner conductor is 1.00 A out of the page and the current in the outer conductor is 3.00 A into the page. Determine the magnitude and direction of the magnetic field at points *a* and *b*.

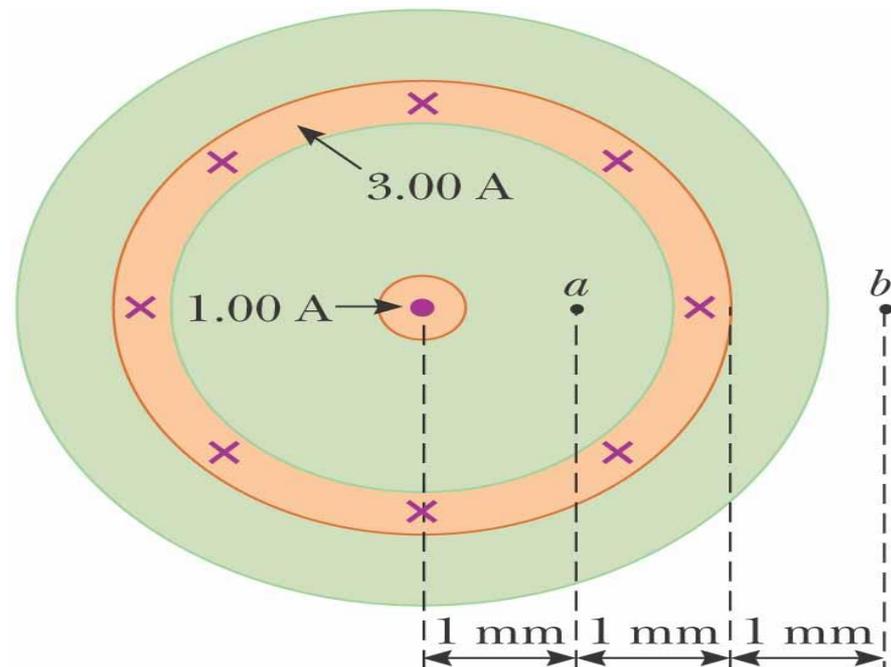

©2004 Thomson - Brooks/Cole

8- The current in the long, straight wire is  $I_1 = 5 \text{ A}$  and the wire lies in the plane of the rectangular loop, which carries current  $I_2 = 10 \text{ A}$ . The dimensions are  $c = 0.1 \text{ m}$ ,  $a = 0.15 \text{ m}$ , and  $l = 0.45 \text{ m}$ . Find the magnitude and direction of the net force exerted on the loop by the magnetic field created by the wire.

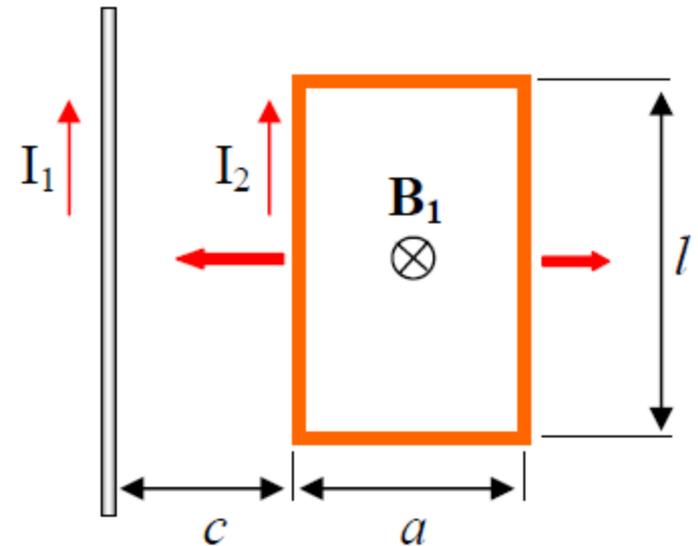

9- Two long, parallel wires are attracted to each other by a force per unit length of  $320\mu\text{N/m}$  when they are separated by a vertical distance of  $0.500\text{m}$ . The current in the upper wire is  $20.0\text{ A}$  to the right. Determine the location between the two wires where the magnetic field is zero.

