

Chapter 4

Ultimate Bearing Capacity of Shallow Foundations

Omitted parts:

Sections 4.7, 4.8, 4.13

Examples 4.8, 4.9 , 4.12

Pages 191-194

Ultimate Bearing Capacity of Shallow Foundations

To perform satisfactorily, shallow foundations must have **two** main characteristics:

1. They have to be safe against overall **shear failure** in the soil that supports them.
2. They cannot undergo **excessive displacement**, or **excessive settlement**.

The term **excessive** is relative, because the degree of settlement allowed for a structure depends on several considerations.


TYPES OF SHEAR FAILURE

Types of Shear Failure

Shear Failure: Also called “Bearing capacity failure” and it occurs when the shear stresses in the soil exceed the shear strength of the soil.

There are three types of shear failure in the soil:



- a) **General Shear Failure**
- b) **Local Shear Failure**
- c) **Punching Shear Failure**

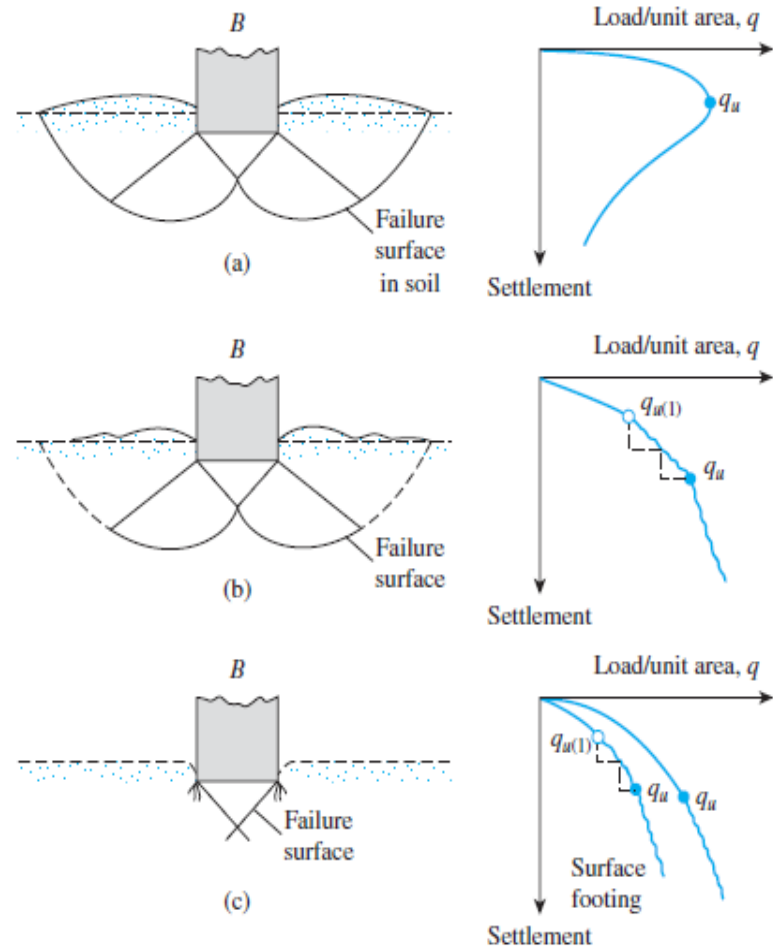

GENERAL SHEAR FAILURE


The following are some characteristics of general shear failure:

- ❑ Occurs over dense sand or stiff cohesive soil.
- ❑ Involves total rupture of the underlying soil.
- ❑ There is a continuous shear failure of the soil from below the footing to the ground surface (solid lines in the figure).
- ❑ When the (load / unit area) plotted versus settlement of the footing, there is a distinct load at which the foundation fails (Q_u)
- ❑ The value of (Q_u) divided by the area of the footing is considered to be the ultimate bearing capacity of the footing (q_u).
- ❑ For general shear failure, the ultimate bearing capacity has been defined as the bearing stress that causes a **sudden** catastrophic failure of the foundation.
- ❑ As shown in the figure, a general shear failure ruptures occur and pushed up the soil on both sides of the footing (In laboratory).

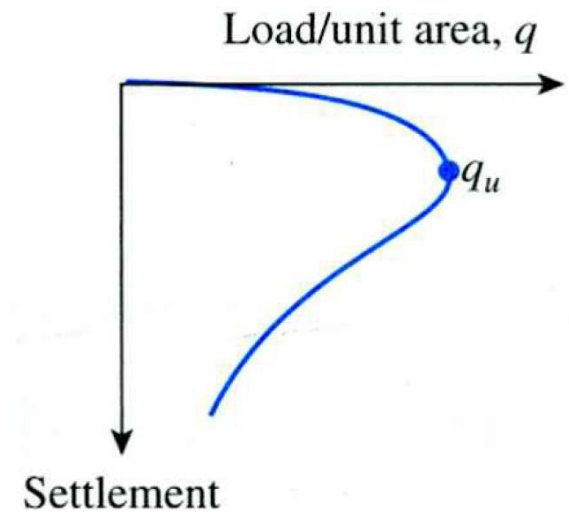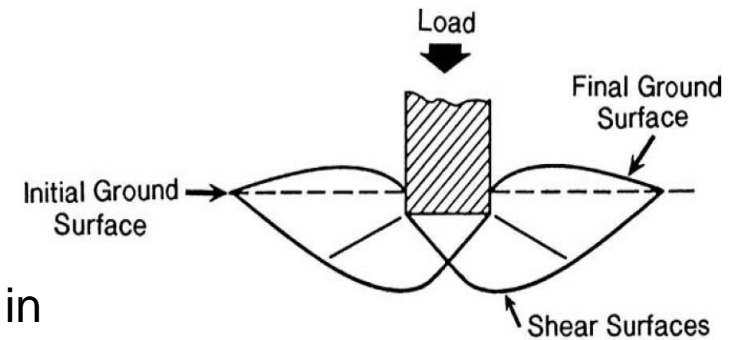

GENERAL SHEAR FAILURE



For actual failures on the field, the soil is often pushed up on **only one side** of the footing with **subsequent tilting** of the structure as shown in figure below:

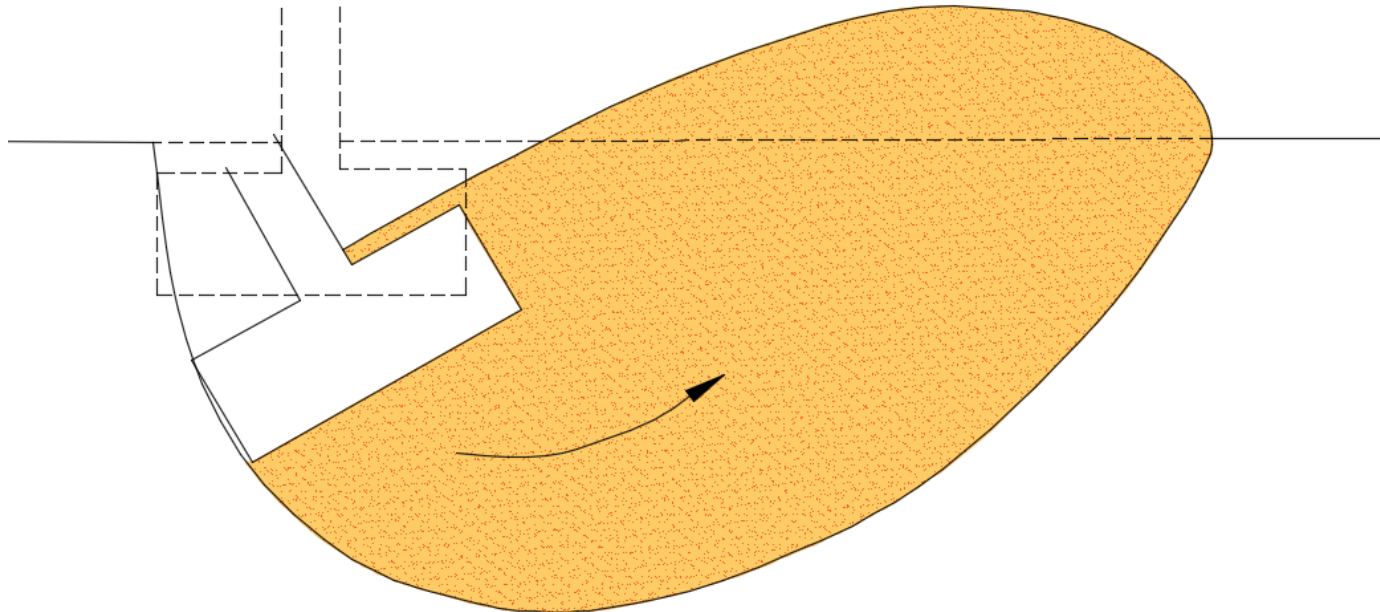

LOCAL SHEAR FAILURE


The following are some characteristics of local shear failure:

- ❑ Occurs over sand or clayey soil of medium compaction.
- ❑ Involves rupture of the soil only immediately below the footing.
- ❑ There is soil bulging on both sides of the footing, but the bulging is not as significant as in general shear. That's because the underlying soil compacted less than the soil in general shear.
- ❑ The failure surface of the soil will **gradually** (not sudden) extend outward from the foundation (not the ground surface) as shown by **solid lines** in the figure.
- ❑ So, local shear failure can be considered as a transitional phase between general shear and punching shear.

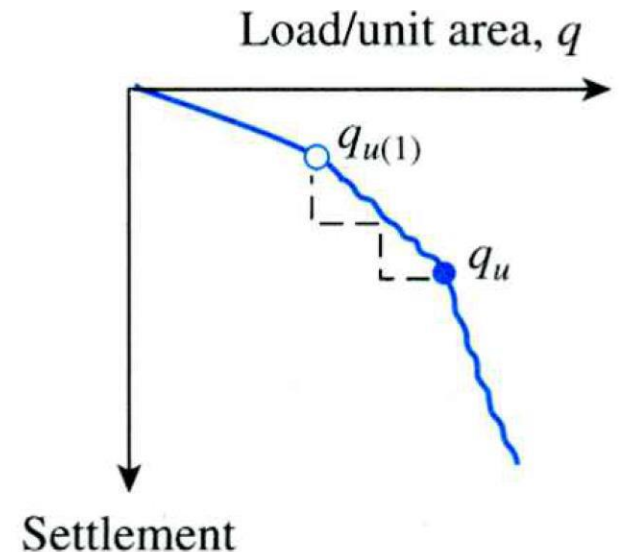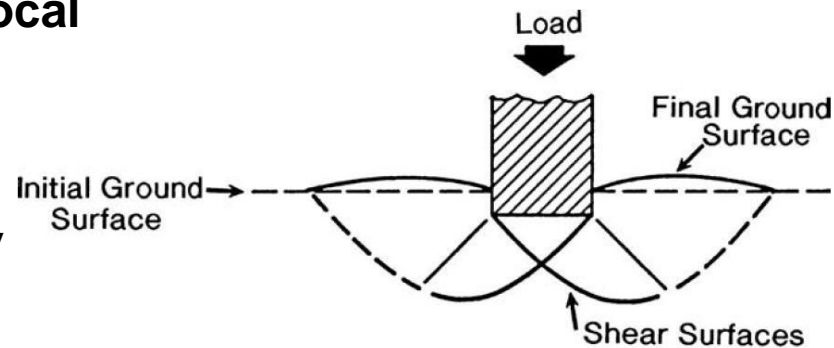

LOCAL SHEAR FAILURE



- ❑ Because of the transitional nature of local shear failure, the ultimate bearing capacity could be defined as the first failure load ($q_{u,1}$) which occur at the point which have the first measure nonlinearity in the load/unit area-settlement curve (open circle), or at the point where the settlement starts rapidly increase (q_u) (closed circle).
- ❑ This value of (q_u) is the required (load/unit area) to extends the failure surface to the ground surface (dashed lines in the figure).
- ❑ In this type of failure, the value of (q_u) is not the peak value so, this failure called (Local Shear Failure).
- ❑ The actual local shear failure in field is proceed as shown in the figure below:

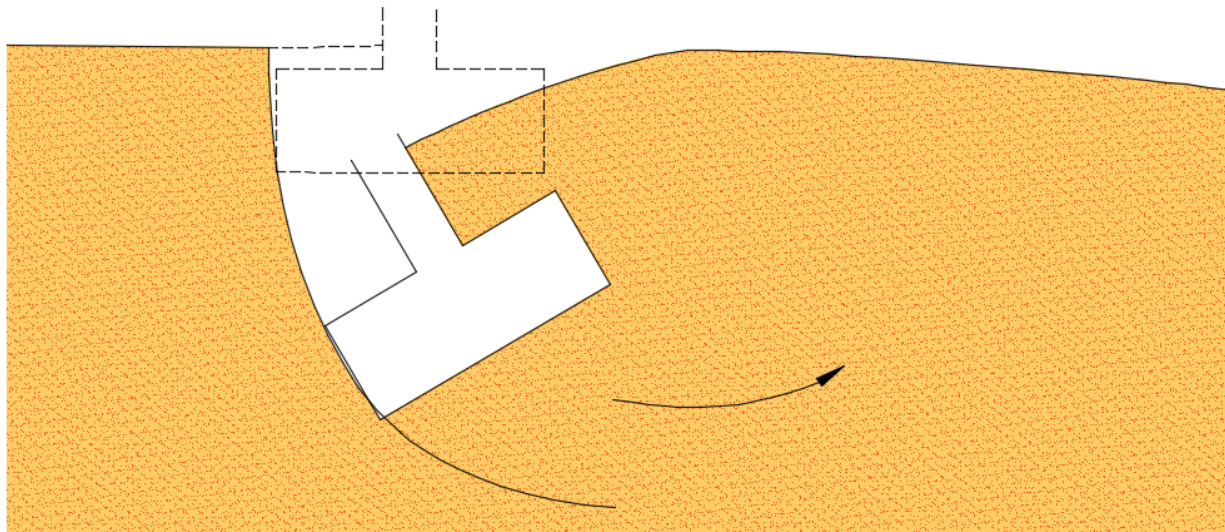

PUNSHING SHEAR FAILURE


The following are some characteristics of punching shear failure:

- ☐ Occurs over fairly loose soil.
- ☐ Punching shear failure does not develop the distinct shear surfaces associated with a general shear failure.
- ☐ The soil outside the loaded area remains relatively uninvolved and there is a minimal movement of soil on both sides of the footing.
- ☐ The process of deformation of the footing involves compression of the soil directly below the footing as well as the vertical shearing of soil around the footing perimeter.
- ☐ As shown in figure, the (q)-settlement curve does not have a dramatic break and the bearing capacity is often defined as the first measure nonlinearity in the (q)-settlement curve($q_u, 1$).

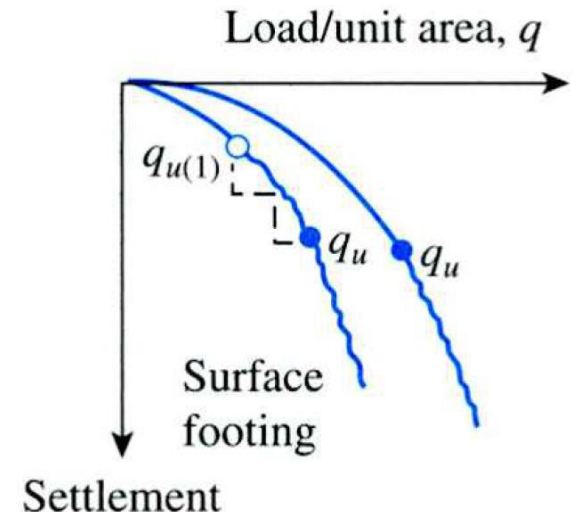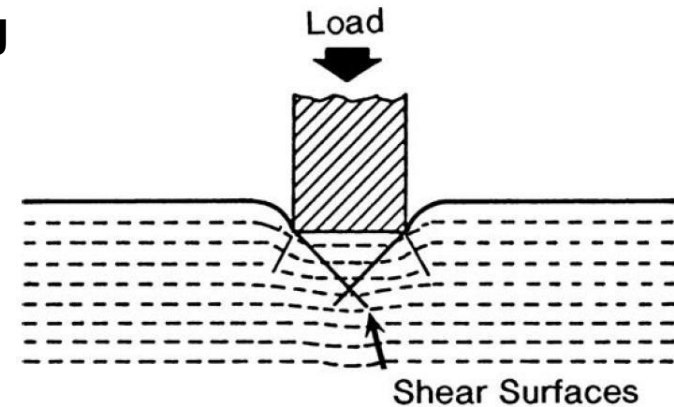

PUNSHING SHEAR FAILURE

- ❑ Beyond the ultimate failure (load/unit area) ($q_{u,1}$), the (load/unit area)-settlement curve will be steep and practically linear.
- ❑ The actual punching shear failure in field is proceed as shown in the figure below:

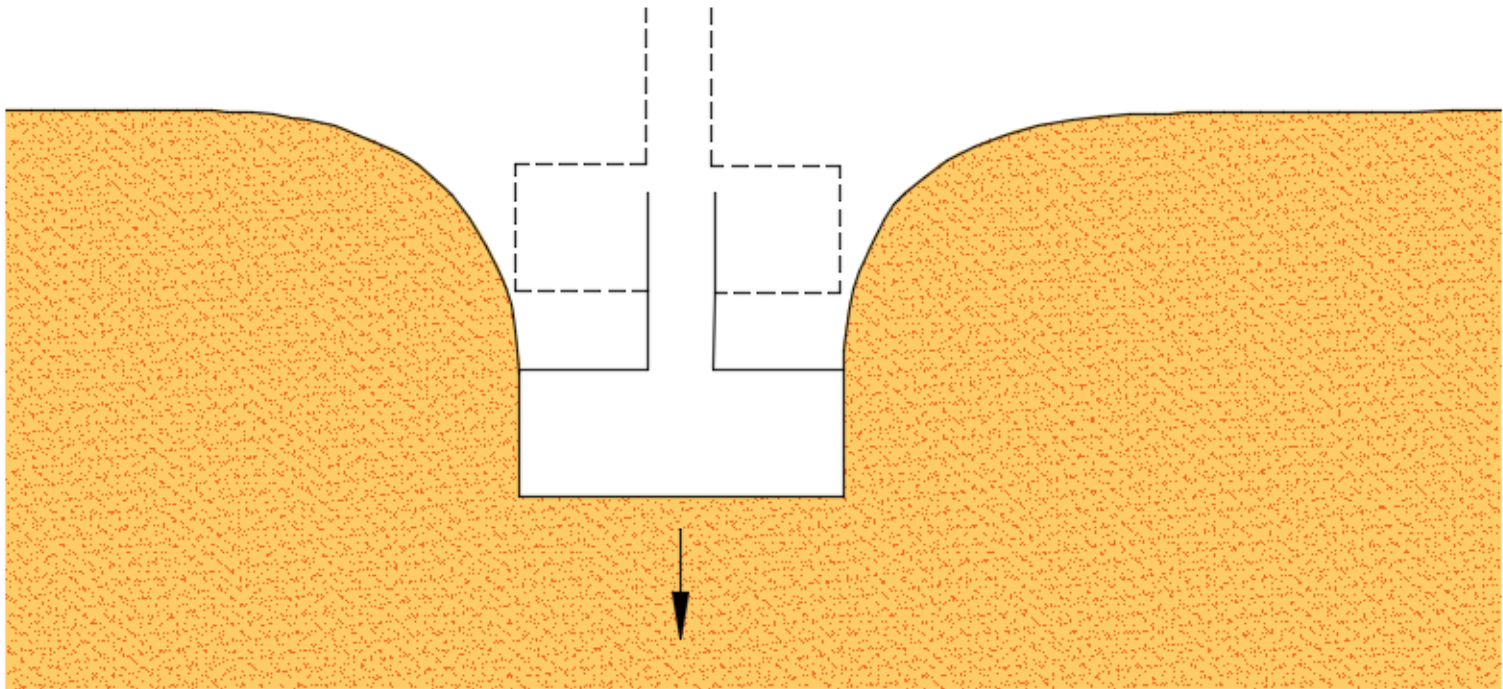

Modes of Foundation Failure in Sand

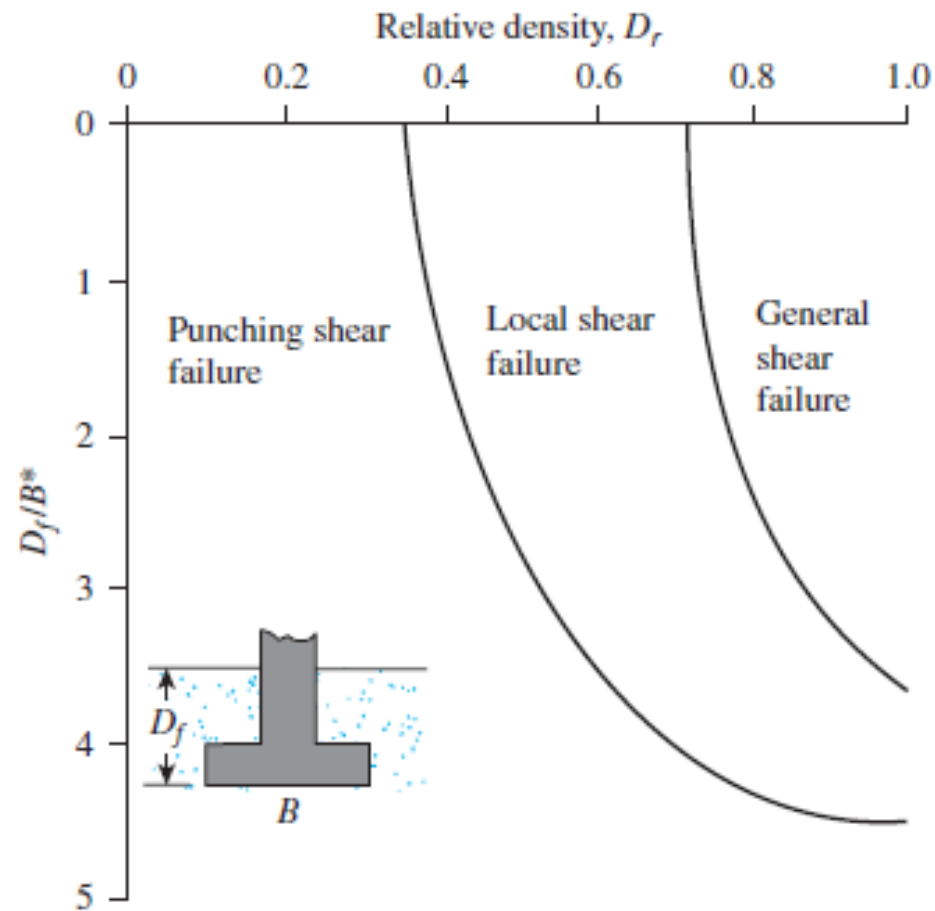


Figure 4.3 Modes of foundation failure in sand (After Vesic, 1973)

TERZAGHI'S BEARING CAPACITY THEORY

Terzaghi was the first to present a comprehensive theory for evaluation of the ultimate bearing capacity of rough shallow foundation.

This theory is based on **the following assumptions**:

1. The foundation is considered to be shallow if ($D_f \leq B$).
2. The foundation is considered to be strip or continuous if ($B/L \rightarrow 0.0$). (Width to length ratio is very small and goes to zero), and the derivation of the equation is to a strip footing.
3. The effect of soil above the bottom of the foundation may be assumed to be replaced by an equivalent surcharge ($q = \gamma D_f$). So, the shearing resistance of this soil along the failure surfaces is neglected (Lines **GI** and **HJ** in the figure)
4. The failure surface of the soil is similar to general shear failure (i.e. equation is derived for general shear failure) as shown in the figure.

Note:

1. In recent studies, investigators have suggested that, foundations are considered to be shallow if [$D_f \leq (3 \rightarrow 4)B$], otherwise, the foundation is deep.
2. Always the value of (q) is the effective stress at the bottom of the foundation.

TERZAGHI'S BEARING CAPACITY THEORY

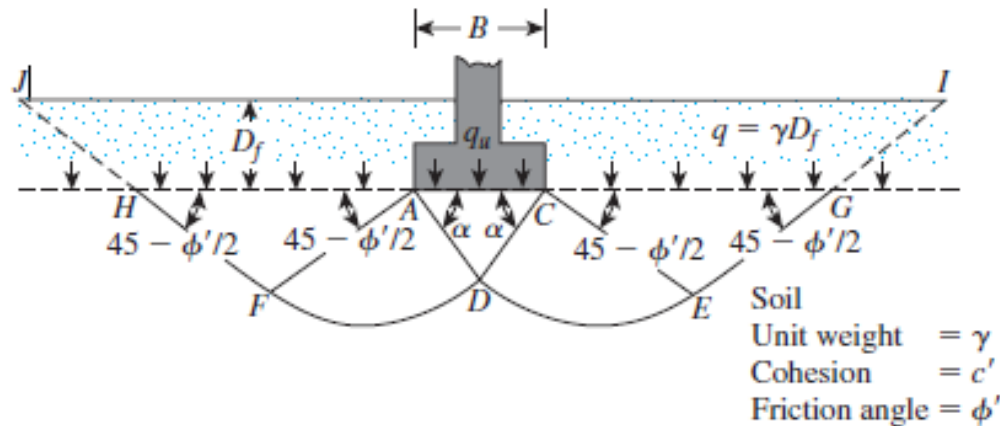


Figure 4.6 Bearing capacity failure in soil under a rough rigid continuous (strip) foundation

The failure zone under the foundation can be separated into three parts:

1. The triangular zone **ACD** immediately under the foundation
2. The radial shear zones **ADF** and **CDE** with the curves **DE** and **DF** being arcs of a logarithmic spiral
3. Two triangular Rankine passive zones **AFH** and **CEG**

TERZAGHI'S BEARING CAPACITY EQUATION

The equation was derived for a strip footing and general shear failure:

$$q_u = c'N_c + qN_q + 0.5\gamma BN_\gamma \quad (\text{for continuous or strip footing})$$

Where

q_u = Ultimate bearing capacity of the soil (KN/m²)

c' = Cohesion of soil (KN/m²)

q = Effective stress at the bottom of the foundation (KN/m²)

N_c , N_q , N_γ = Bearing capacity factors (non-dimensional) and are functions only of the soil friction angle, ϕ'

The variations of bearing capacity factors and underlying soil friction angle are given in (Table 4.1) for general shear failure.

The equation above (for strip footing) was modified to be useful for both square and circular footings as following:

For **square** footing: $q_u = 1.3c'N_c + qN_q + 0.4\gamma BN_\gamma$

B = The dimension of each side of the foundation .

For **circular** footing: $q_u = 1.3c'N_c + qN_q + 0.3\gamma BN_\gamma$

B = The diameter of the foundation .

Note:

These two equations are also for general shear failure, and all factors in the two equations (except, B ,) are the same as explained for strip footing.

TERZAGHI'S BEARING CAPACITY FACTORS

Table 4.1 Terzaghi's Bearing Capacity Factors—Eqs. (4.15), (4.13), and (4.11).^a

ϕ'	N_c	N_q	N_γ^a	ϕ'	N_c	N_q	N_γ^a
0	5.70	1.00	0.00	26	27.09	14.21	9.84
1	6.00	1.10	0.01	27	29.24	15.90	11.60
2	6.30	1.22	0.04	28	31.61	17.81	13.70
3	6.62	1.35	0.06	29	34.24	19.98	16.18
4	6.97	1.49	0.10	30	37.16	22.46	19.13
5	7.34	1.64	0.14	31	40.41	25.28	22.65
6	7.73	1.81	0.20	32	44.04	28.52	26.87
7	8.15	2.00	0.27	33	48.09	32.23	31.94
8	8.60	2.21	0.35	34	52.64	36.50	38.04
9	9.09	2.44	0.44	35	57.75	41.44	45.41
10	9.61	2.69	0.56	36	63.53	47.16	54.36
11	10.16	2.98	0.69	37	70.01	53.80	65.27
12	10.76	3.29	0.85	38	77.50	61.55	78.61
13	11.41	3.63	1.04	39	85.97	70.61	95.03
14	12.11	4.02	1.26	40	95.66	81.27	115.31
15	12.86	4.45	1.52	41	106.81	93.85	140.51
16	13.68	4.92	1.82	42	119.67	108.75	171.99
17	14.60	5.45	2.18	43	134.58	126.50	211.56
18	15.12	6.04	2.59	44	151.95	147.74	261.60
19	16.56	6.70	3.07	45	172.28	173.28	325.34
20	17.69	7.44	3.64	46	196.22	204.19	407.11
21	18.92	8.26	4.31	47	224.55	241.80	512.84
22	20.27	9.19	5.09	48	258.28	287.85	650.67
23	21.75	10.23	6.00	49	298.71	344.63	831.99
24	23.36	11.40	7.08	50	347.50	415.14	1072.80
25	25.13	12.72	8.34				

^aFrom Kumbhojkar (1993)

FACTOR OF SAFETY

Ultimate bearing capacity is the maximum value the soil can bear it.

i.e. if the bearing stress from foundation exceeds the ultimate bearing capacity of the soil, shear failure in soil will occur.

so we must design a foundation for a bearing capacity less than the ultimate bearing capacity to prevent shear failure in the soil. This bearing capacity is “**Allowable Bearing Capacity**” and we design for it.

i.e. the applied stress from foundation must not exceed the allowable bearing capacity of soil.

$$q_{\text{all, gross}} = \frac{q_{\text{u, gross}}}{FS}$$

$q_{\text{all, gross}}$ = Gross allowable bearing capacity

$q_{\text{u, gross}}$ = Gross ultimate bearing capacity (Terzaghi equation)

FS = Factor of safety for bearing capacity ≥ 3

However, practicing engineers prefer to use the “**net** allowable bearing capacity” such that:

$$q_{\text{all (net)}} = \frac{q_u - q}{FS}$$

$$q = \gamma D_f$$

Example 4.1

Example 4.1

A square foundation is $2\text{ m} \times 2\text{ m}$ in plan. The soil supporting the foundation has a friction angle of $\phi' = 25^\circ$ and $c' = 20\text{ kN/m}^2$. The unit weight of soil, γ , is 16.5 kN/m^3 . Determine the allowable gross load on the foundation with a factor of safety (FS) of 3. Assume that the depth of the foundation (D_f) is 1.5 m and that general shear failure occurs in the soil.

Solution

From Eq. (4.17)

$$q_u = 1.3c'N_c + qN_q + 0.4\gamma BN_\gamma$$

From Table 4.1, for $\phi' = 25^\circ$,

$$N_c = 25.13$$

$$N_q = 12.72$$

$$N_\gamma = 8.34$$

Thus,

$$\begin{aligned} q_u &= (1.3)(20)(25.13) + (1.5 \times 16.5)(12.72) + (0.4)(16.5)(2)(8.34) \\ &= 653.38 + 314.82 + 110.09 = 1078.29\text{ kN/m}^2 \end{aligned}$$

So, the allowable load per unit area of the foundation is

$$q_{\text{all}} = \frac{q_u}{\text{FS}} = \frac{1078.29}{3} \approx 359.5\text{ kN/m}^2$$

Thus, the total allowable gross load is

$$Q = (359.5) B^2 = (359.5) (2 \times 2) = 1438\text{ kN}$$



Example 4.2

Example 4.2

Refer to Example 4.1. Assume that the shear-strength parameters of the soil are the same. A square foundation measuring $B \times B$ will be subjected to an allowable gross load of 1000 kN with FS = 3 and $D_f = 1$ m. Determine the size B of the foundation.

Solution

Allowable gross load $Q = 1000$ kN with FS = 3. Hence, the ultimate gross load $Q_u = (Q)(\text{FS}) = (1000)(3) = 3000$ kN. So,

$$q_u = \frac{Q_u}{B^2} = \frac{3000}{B^2} \quad (\text{a})$$

From Eq. (4.17),

$$q_u = 1.3c'N_c + qN_q + 0.4\gamma BN_\gamma$$

For $\phi' = 25^\circ$, $N_c = 25.13$, $N_q = 12.72$, and $N_\gamma = 8.34$.

Also,

$$q = \gamma D_f = (16.5)(1) = 16.5 \text{ kN/m}^2$$

Now,

$$\begin{aligned} q_u &= (1.3)(20)(25.13) + (16.5)(12.72) + (0.4)(16.5)(B)(8.34) \\ &= 863.26 + 55.04B \end{aligned} \quad (\text{b})$$

Combining Eqs. (a) and (b),

$$\frac{3000}{B^2} = 863.26 + 55.04B \quad (\text{c})$$

By trial and error, we have

$$B = 1.77 \text{ m} \approx 1.8 \text{ m}$$



Modification of Bearing Capacity Equations for Water Table

Terzaghi equation gives the ultimate bearing capacity based on the assumption that the water table is located well below the foundation.

However, if the water table is close to the foundation, the bearing capacity will decrease due to the effect of water table, so, some modification of the bearing capacity equation will be necessary.

The values which will be modified are:


1. q (for soil above the foundation) in the second term of equation.
2. γ (for the underlying soil) in the third term of equation .

There are three cases according to location of water table:

Case I. The water table is located so that $0 \leq D_1 \leq D_f$

$$q = D_1 \gamma + D_2 (\gamma_{\text{sat}} - \gamma_w)$$

$$\gamma \rightarrow \gamma' = \gamma_{\text{sat}} - \gamma_w$$

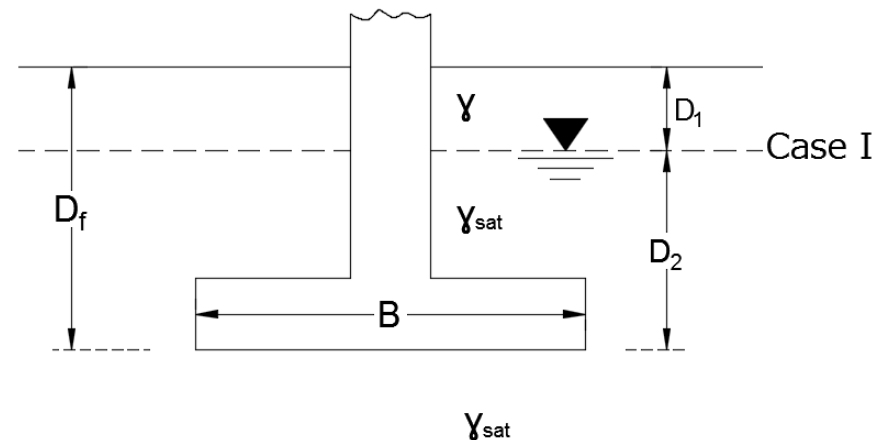


Modification of Bearing Capacity Equations for Water Table

Case II. The water table is located so that $0 \leq d \leq B$:

$$q = \gamma D_f$$

$$\bar{\gamma} = \gamma' + \frac{d}{B}(\gamma - \gamma')$$

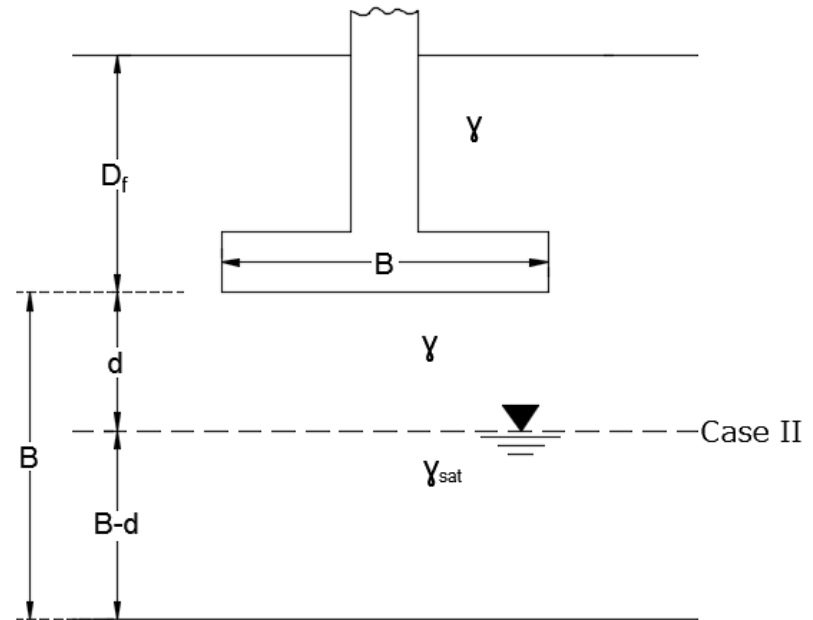

Case III. The water table is located so that $d \geq B$

in this case the water table is assumed have no effect on the ultimate bearing capacity.

The General Bearing Capacity Equation

Terzaghi's equations shortcomings:

- ❑ They don't deal with rectangular foundations ($0 < B/L < 1$).
- ❑ The equations do not take into account the shearing resistance along the failure surface in soil above the bottom of the foundation.
- ❑ The inclination of the load on the foundation is not considered (if exist).

To account for all these shortcomings, Meyerhof suggested the following form of the general bearing capacity equation:

$$q_u = c' N_c F_{cs} F_{cd} F_{ci} + q N_q F_{qs} F_{qd} F_{qi} + 0.5 B \gamma N_\gamma F_{\gamma s} F_{\gamma d} F_{\gamma i}$$

Where

c' = Cohesion of the underlying soil

q = Effective stress at the level of the bottom of the foundation.

γ = Unit weight of the underlying soil

B = Width of footing (=diameter for a circular foundation).

N_c, N_q, N_γ = Bearing capacity factors (Table 4.2)

$F_{cs}, F_{qs}, F_{\gamma s}$ = Shape factors.

$F_{cd}, F_{qd}, F_{\gamma d}$ = Depth factors.

$F_{ci}, F_{qi}, F_{\gamma i}$ = Inclination factors.

In the case of inclined loading on a foundation, the general equation provides the vertical component.

The General Bearing Capacity Equation

Notes:

1. This equation is valid for both general and local shear failure.
2. This equation is similar to original equation for ultimate bearing capacity (Terzaghi's equation) which was derived for continuous foundation, but the shape, depth, and load inclination factors are added to Terzaghi's equation to be suitable for any case may exist.

Bearing Capacity Factors: N_c , N_q , N_γ

The angle $\alpha = \phi'$ (according Terzaghi theory) was replaced by $\alpha = 45 + \phi'/2$.
So, the bearing capacity factor will be changed.

The variations of bearing capacity factors (N_c , N_q , N_γ) and underlying soil friction angle (ϕ') are given in Table 4.2.

The General Bearing Capacity Equation

Table 4.2 Bearing Capacity Factors

ϕ'	N_c	N_q	N_γ	ϕ'	N_c	N_q	N_γ
0	5.14	1.00	0.00	16	11.63	4.34	3.06
1	5.38	1.09	0.07	17	12.34	4.77	3.53
2	5.63	1.20	0.15	18	13.10	5.26	4.07
3	5.90	1.31	0.24	19	13.93	5.80	4.68
4	6.19	1.43	0.34	20	14.83	6.40	5.39
5	6.49	1.57	0.45	21	15.82	7.07	6.20
6	6.81	1.72	0.57	22	16.88	7.82	7.13
7	7.16	1.88	0.71	23	18.05	8.66	8.20
8	7.53	2.06	0.86	24	19.32	9.60	9.44
9	7.92	2.25	1.03	25	20.72	10.66	10.88
10	8.35	2.47	1.22	26	22.25	11.85	12.54
11	8.80	2.71	1.44	27	23.94	13.20	14.47
12	9.28	2.97	1.69	28	25.80	14.72	16.72
13	9.81	3.26	1.97	29	27.86	16.44	19.34
14	10.37	3.59	2.29	30	30.14	18.40	22.40
15	10.98	3.94	2.65	31	32.67	20.63	25.99
32	35.49	23.18	30.22	42	93.71	85.38	155.55
33	38.64	26.09	35.19	43	105.11	99.02	186.54
34	42.16	29.44	41.06	44	118.37	115.31	224.64
35	46.12	33.30	48.03	45	133.88	134.88	271.76
36	50.59	37.75	56.31	46	152.10	158.51	330.35
37	55.63	42.92	66.19	47	173.64	187.21	403.67
38	61.35	48.93	78.03	48	199.26	222.31	496.01
39	67.87	55.96	92.25	49	229.93	265.51	613.16
40	75.31	64.20	109.41	50	266.89	319.07	762.89
41	83.86	73.90	130.22				

The General Bearing Capacity Equation

Shape factors:

Shape

$$F_{cs} = 1 + \left(\frac{B}{L}\right)\left(\frac{N_q}{N_c}\right)$$

$$F_{qs} = 1 + \left(\frac{B}{L}\right) \tan \phi'$$

$$F_{\gamma s} = 1 - 0.4 \left(\frac{B}{L}\right)$$

DeBeer (1970)

Notes:

1. If the foundation is continuous or strip $\rightarrow B/L=0.0$
2. If the foundation is circular $\rightarrow B=L=\text{diameter} \rightarrow B/L=1$

The General Bearing Capacity Equation

Depth Factors:

Important Notes:

1. If the value of (B) or (D_f) is required, you should do the following:

Assume ($D_f/B \leq 1$) and calculate depth factors in term of (B) or (D_f).

Substitute in the general equation, then calculate (B) or (D_f).

After calculating the required value, you must check your assumption $\rightarrow (D_f/B \leq 1)$.

If the assumption is true, the calculated value is the final required value.

If the assumption is wrong, you must calculate depth factors in case of ($D_f/B > 1$) and then calculate (B) or (D_f) to get the true value.

2. For both cases ($D_f/B \leq 1$) and ($D_f/B > 1$) if $\phi > 0 \rightarrow$ calculate F_{qd} firstly, because F_{cd} depends on F_{qd} .

Depth

$$\frac{D_f}{B} \leq 1$$

Hansen (1970)

For $\phi = 0$:

$$F_{cd} = 1 + 0.4 \left(\frac{D_f}{B} \right)$$

$$F_{qd} = 1$$

$$F_{\gamma d} = 1$$

For $\phi' > 0$:

$$F_{cd} = F_{qd} - \frac{1 - F_{qd}}{N_c \tan \phi'}$$

$$F_{qd} = 1 + 2 \tan \phi' (1 - \sin \phi')^2 \left(\frac{D_f}{B} \right)$$

$$F_{\gamma d} = 1$$

$$\frac{D_f}{B} > 1$$

For $\phi = 0$:

$$F_{cd} = 1 + 0.4 \tan^{-1} \left(\frac{D_f}{B} \right)$$

$$F_{qd} = 1$$

$$F_{\gamma d} = 1$$

For $\phi' > 0$:

$$F_{cd} = F_{qd} - \frac{1 - F_{qd}}{N_c \tan \phi'}$$

$$F_{qd} = 1 + 2 \tan \phi' (1 - \sin \phi')^2 \tan^{-1} \left(\frac{D_f}{B} \right)$$

$$F_{\gamma d} = 1$$

The General Bearing Capacity Equation

Inclination Factors:

Inclination

$$F_{ci} = F_{qi} = \left(1 - \frac{\beta^\circ}{90^\circ}\right)^2$$

Meyerhof (1963); Hanna and Meyerhof (1981)

$$F_{\gamma i} = \left(1 - \frac{\beta^\circ}{\phi'}\right)^2$$

β = inclination of the load on the foundation with respect to the vertical

Note:

If $\beta^\circ = \phi \rightarrow F_{\gamma i} = 0.0$, so you don't need to calculate $F_{\gamma s}$ and $F_{\gamma d}$, because the last term in Meyerhof equation will be zero.

Example 4.3

Example 4.3

Solve Example Problem 4.1 using Eq. (4.26).

Solution

From Eq. (4.26),

$$q_u = c'N_cF_{cs}F_{cd}F_{ci} + qN_qF_{qs}F_{qd}F_{qi} + \frac{1}{2}\gamma BN_\gamma F_{\gamma s}F_{\gamma d}F_{\gamma i}$$

Since the load is vertical, $F_{ci} = F_{qi} = F_{\gamma i} = 1$. From Table 4.2 for $\phi' = 25^\circ$, $N_c = 20.72$, $N_q = 10.66$, and $N_\gamma = 10.88$.

Using Table 4.3,

$$F_{cs} = 1 + \left(\frac{B}{L}\right)\left(\frac{N_q}{N_c}\right) = 1 + \left(\frac{2}{2}\right)\left(\frac{10.66}{20.72}\right) = 1.514$$

$$F_{qs} = 1 + \left(\frac{B}{L}\right)\tan \phi' = 1 + \left(\frac{2}{2}\right)\tan 25 = 1.466$$

$$F_{\gamma s} = 1 - 0.4\left(\frac{B}{L}\right) = 1 - 0.4\left(\frac{2}{2}\right) = 0.6$$

$$F_{qd} = 1 + 2 \tan \phi' (1 - \sin \phi')^2 \left(\frac{D_f}{B}\right)$$

$$= 1 + (2)(\tan 25)(1 - \sin 25)^2 \left(\frac{1.5}{2}\right) = 1.233$$

$$F_{cd} = F_{qd} - \frac{1 - F_{qd}}{N_c \tan \phi'} = 1.233 - \left[\frac{1 - 1.233}{(20.72)(\tan 25)} \right] = 1.257$$

$$F_{\gamma d} = 1$$

Hence,

$$\begin{aligned} q_u &= (20)(20.72)(1.514)(1.257)(1) \\ &\quad + (1.5 \times 16.5)(10.66)(1.466)(1.233)(1) \\ &\quad + \frac{1}{2}(16.5)(2)(10.88)(0.6)(1)(1) \\ &= 788.6 + 476.9 + 107.7 = 1373.2 \text{ kN/m}^2 \\ q_{all} &= \frac{q_u}{FS} = \frac{1373.2}{3} = 457.7 \text{ kN/m}^2 \\ Q &= (457.7)(2 \times 2) = 1830.8 \text{ kN} \end{aligned}$$

Example 4.1

A square foundation is $2 \text{ m} \times 2 \text{ m}$ in plan. The soil supporting the foundation has a friction angle of $\phi' = 25^\circ$ and $c' = 20 \text{ kN/m}^2$. The unit weight of soil, γ , is 16.5 kN/m^3 . Determine the allowable gross load on the foundation with a factor of safety (FS) of 3. Assume that the depth of the foundation (D_f) is 1.5 m and that general shear failure occurs in the soil.

$$Q = 1438 \text{ KN}$$



Read Example 4.4

Example 4.5

Example 4.5

A square column foundation (Figure 4.11) is to be constructed on a sand deposit. The allowable load Q will be inclined at an angle $\beta = 20^\circ$ with the vertical. The standard penetration numbers N_{60} obtained from the field are as follows.

Depth (m)	N_{60}
1.5	3
3.0	6
4.5	9
6.0	10
7.5	10
9.0	8

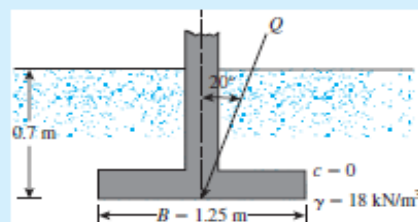


Figure 4.11

Determine Q . Use FS = 3, Eq. (3.29), and Eq. (4.26).

Solution

From Eq. (3.29),

$$\phi' \text{ (deg)} = 27.1 + 0.3N_{60} - 0.00054(N_{60})^2$$

The following is an estimation of ϕ' in the field using Eq. (3.29).

Depth (m)	N_{60}	$\phi' \text{ (deg)}$
1.5	3	28
3.0	6	29
4.5	9	30
6.0	10	30
7.5	10	30
9.0	8	29

Average = $29.4^\circ \approx 30^\circ$

With $c' = 0$, the ultimate bearing capacity [Eq. (4.26)] becomes

$$q_u = qN_q F_{qs} F_{qd} F_{q\beta} + \frac{1}{2} \gamma B N_\gamma F_{\gamma s} F_{\gamma d} F_{\gamma\beta}$$

$$q = (0.7)(18) = 12.6 \text{ kN/m}^2$$

$$\gamma = 18 \text{ kN/m}^3$$

From Table 4.2 for $\phi' = 30^\circ$,

$$N_q = 18.4$$

$$N_\gamma = 22.4$$

From Table 4.3, (Note: $B = L$)

$$F_{qs} = 1 + \left(\frac{B}{L}\right) \tan \phi' = 1 + 0.577 = 1.577$$

$$F_{\gamma s} = 1 - 0.4 \left(\frac{B}{L}\right) = 0.6$$

$$F_{qd} = 1 + 2 \tan \phi' (1 - \sin \phi')^2 \frac{D_f}{B} = 1 + \frac{(0.289)(0.7)}{1.25} = 1.162$$

$$F_{\gamma d} = 1$$

$$F_{q\beta} = \left(1 - \frac{\beta^2}{90^\circ}\right)^2 = \left(1 - \frac{20}{90}\right)^2 = 0.605$$

$$F_{\gamma\beta} = \left(1 - \frac{\beta^2}{\phi'}\right)^2 = \left(1 - \frac{20}{30}\right)^2 = 0.11$$

Hence,

$$q_u = (12.6)(18.4)(1.577)(1.162)(0.605) + \left(\frac{1}{2}\right)(18)(1.25)(22.4)(0.6)(1)(0.11) = 273.66 \text{ kN/m}^2$$

$$q_{all} = \frac{q_u}{FS} = \frac{273.66}{3} = 91.22 \text{ kN/m}^2$$

Now,

$$Q \cos 20 = q_{all} B^2 = (91.22)(1.25)^2$$

$$Q \approx 151.7 \text{ kN}$$

EFFECT OF SOIL COMPRESSIBILITY

The change of failure mode is due to soil compressibility.

Vesic (1973) proposed the following modification to the general bearing capacity equation:

$$q_u = c' N_c F_{cs} F_{cd} F_{cc} + q N_q F_{qs} F_{qd} F_{qc} + 0.5 B \gamma N_\gamma F_{\gamma s} F_{\gamma d} F_{\gamma c}$$

where F_{cc} , F_{qc} , and $F_{\gamma c}$ are soil compressibility factors.

Steps for calculating the soil compressibility factors.

Page 184

Step 1. Calculate the rigidity index, I_r , of the soil at a depth approximately $B/2$ below the bottom of the foundation, or

$$I_r = \frac{G_s}{c' + q' \tan \phi'} \quad (4.39)$$

where

G_s = shear modulus of the soil

q' = effective overburden pressure at a depth of $D_f + B/2$

Step 2. The critical rigidity index, $I_{r(cr)}$, can be expressed as

$$I_{r(cr)} = \frac{1}{2} \left\{ \exp \left[\left(3.30 - 0.45 \frac{B}{L} \right) \cot \left(45 - \frac{\phi'}{2} \right) \right] \right\} \quad (4.40)$$

The variations of $I_{r(cr)}$ with B/L are given in Table 4.8.

Step 3. If $I_r \geq I_{r(cr)}$, then

$$F_{cc} = F_{qc} = F_{\gamma c} = 1$$

However, if $I_r < I_{r(cr)}$, then

$$F_{\gamma c} = F_{qc} = \exp \left\{ \left(-4.4 + 0.6 \frac{B}{L} \right) \tan \phi' + \left[\frac{(3.07 \sin \phi') (\log 2I_r)}{1 + \sin \phi'} \right] \right\} \quad (4.41)$$

Figure 4.16 shows the variation of $F_{\gamma c} = F_{qc}$ [see Eq. (4.41)] with ϕ' and I_r . For $\phi = 0$,

EFFECT OF SOIL COMPRESSIBILITY

Table 4.8 Variation of $I_{r(cc)}$ with ϕ' and B/L

ϕ' (deg)	$I_{r(cc)}$					
	$B/L = 0$	$B/L = 0.2$	$B/L = 0.4$	$B/L = 0.6$	$B/L = 0.8$	$B/L = 1.0$
0	13.56	12.39	11.32	10.35	9.46	8.64
5	18.30	16.59	15.04	13.63	12.36	11.20
10	25.53	22.93	20.60	18.50	16.62	14.93
15	36.85	32.77	29.14	25.92	23.05	20.49
20	55.66	48.95	43.04	37.85	33.29	29.27
25	88.93	77.21	67.04	58.20	50.53	43.88
30	151.78	129.88	111.13	95.09	81.36	69.62
35	283.20	238.24	200.41	168.59	141.82	119.31
40	593.09	488.97	403.13	332.35	274.01	225.90
45	1440.94	1159.56	933.19	750.90	604.26	486.26

$$F_{cc} = 0.32 + 0.12 \frac{B}{L} + 0.60 \log I_r$$

For $\phi' > 0$,

$$F_{cc} = F_{qc} - \frac{1 - F_{qc}}{N_q \tan \phi'}$$

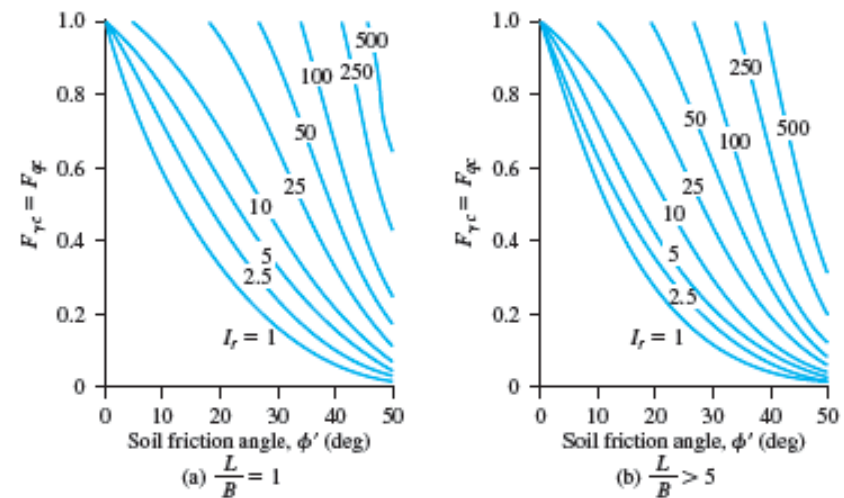


Figure 4.16 Variation of $F_{rc} = F_{qc}$ with I_r and ϕ'

EXAMPLE 4.6

Example 4.6

For a shallow foundation, $B = 0.6$ m, $L = 1.2$ m, and $D_f = 0.6$ m. The known soil characteristics are

Soil:

$$\phi' = 25^\circ$$

$$c' = 48 \text{ kN/m}^2$$

$$\gamma = 18 \text{ kN/m}^3$$

$$\text{Modulus of elasticity, } E_s = 620 \text{ kN/m}^2$$

$$\text{Poisson's ratio, } \mu_s = 0.3$$

Calculate the ultimate bearing capacity.

Solution

From Eq. (4.39),

$$I_r = \frac{G_s}{c' + q' \tan \phi'}$$

However,

$$G_s = \frac{E_s}{2(1 + \mu_s)}$$

So

$$I_r = \frac{E_s}{2(1 + \mu_s)[c' + q' \tan \phi']}$$

Now,

$$q' = \gamma \left(D_f + \frac{B}{2} \right) = 18 \left(0.6 + \frac{0.6}{2} \right) = 16.2 \text{ kN/m}^2$$

Thus,

$$I_r = \frac{620}{2(1 + 0.3)[48 + 16.2 \tan 25]} = 4.29$$

From Eq. (4.40),

$$\begin{aligned} I_{r(c)} &= \frac{1}{2} \left[\exp \left[\left(3.3 - 0.45 \frac{B}{L} \right) \cot \left(45 - \frac{\phi'}{2} \right) \right] \right] \\ &= \frac{1}{2} \left[\exp \left[\left(3.3 - 0.45 \frac{0.6}{1.2} \right) \cot \left(45 - \frac{25}{2} \right) \right] \right] = 62.41 \end{aligned}$$

Since $I_{r(c)} > I_r$, we use Eqs. (4.41) and (4.43) to obtain

$$\begin{aligned} F_{\gamma c} &= F_{\gamma c} 5 \exp \left[\left(-4.4 + 0.6 \frac{B}{L} \right) \tan \phi' + \left[\frac{(3.07 \sin \phi') \log(2I_r)}{1 + \sin \phi'} \right] \right] \\ &= \exp \left[\left(-4.4 + 0.6 \frac{0.6}{1.2} \right) \tan 25 \right. \\ &\quad \left. + \left[\frac{(3.07 \sin 25) \log(2 \times 4.29)}{1 + \sin 25} \right] \right] = 0.347 \end{aligned}$$

and

$$F_{cc} = F_{\gamma c} - \frac{1 - F_{\gamma c}}{N_c \tan \phi'}$$

For $\phi' = 25^\circ$, $N_c = 20.72$ (see Table 4.2); therefore,

$$F_{cc} = 0.347 - \frac{1 - 0.347}{20.72 \tan 25} = 0.279$$

Now, from Eq. (4.38),

$$q_u = c' N_c F_{cc} F_{cd} F_{cc} + q N_q F_{qs} F_{qd} F_{qc} + \frac{1}{2} \gamma B N_\gamma F_{\gamma s} F_{\gamma d} F_{\gamma c}$$

From Table 4.2, for $\phi' = 25^\circ$, $N_c = 20.72$, $N_q = 10.66$, and $N_\gamma = 10.88$. Consequently,

$$F_{cc} = 1 + \left(\frac{N_q}{N_c} \right) \left(\frac{B}{L} \right) = 1 + \left(\frac{10.66}{20.72} \right) \left(\frac{0.6}{1.2} \right) = 1.257$$

$$F_{qs} = 1 + \frac{B}{L} \tan \phi' = 1 + \frac{0.6}{1.2} \tan 25 = 1.233$$

$$F_{\gamma s} = 1 - 0.4 \left(\frac{B}{L} \right) = 1 - 0.4 \frac{0.6}{1.2} = 0.8$$

$$F_{qd} = 1 + 2 \tan \phi' (1 - \sin \phi')^2 \left(\frac{D_f}{B} \right)$$

$$= 1 + 2 \tan 25 (1 - \sin 25)^2 \left(\frac{0.6}{0.6} \right) = 1.311$$

$$\begin{aligned} F_{cd} &= F_{qd} - \frac{1 - F_{qd}}{N_c \tan \phi'} = 1.311 - \frac{1 - 1.311}{20.72 \tan 25} \\ &= 1.343 \end{aligned}$$

and

$$F_{\gamma d} = 1$$

Thus,

$$\begin{aligned} q_u &= (48)(20.72)(1.257)(1.343)(0.279) + (0.6 \times 18)(10.66)(1.233)(1.311) \\ &\quad (0.347) + \left(\frac{1}{2} \right) (18)(0.6)(10.88)(0.8)(1)(0.347) = \mathbf{549.32 \text{ kN/m}^2} \end{aligned}$$


ECENTRICALLY LOADED FOUNDATION

If the load applied on the foundation is in the center of the foundation without eccentricity, the bearing capacity of the soil will be uniform at any point under the foundation (as shown in figure) because there is no any moments on the foundation, and the general equation for stress under the foundation is:

$$\text{Stress } q = \frac{Q}{A} \pm \frac{M_x y}{I_x} \pm \frac{M_y x}{I_y}$$

In this case, the load is in the center of the foundation and there are no moments so,

$$\text{Stress } q = \frac{Q}{A} \quad (\text{uniform at any point below the foundation})$$

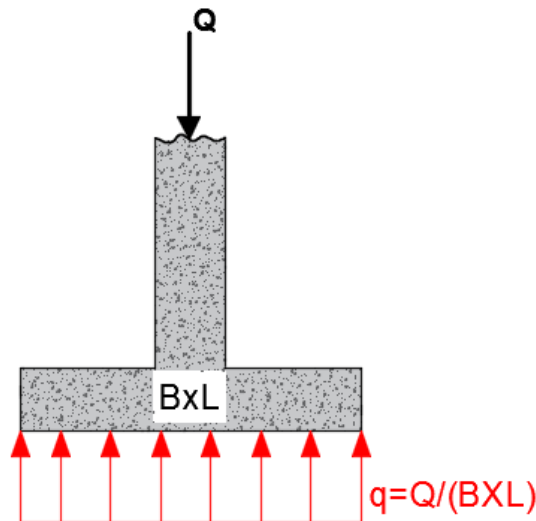


ECENTRICALLY LOADED FOUNDATION

However, in several cases, as with the base of a retaining wall or neighbor footing, the loads does not exist in the center, so foundations are subjected to moments in addition to the vertical load (as shown in the figure).

In such cases, the distribution of pressure by the foundation on the soil is not uniform because there is a moment applied on the foundation and the stress under the foundation will be calculated from:

$$\text{Stress } q = \frac{Q}{A} \pm \frac{M_x y}{I_x} \pm \frac{M_y x}{I_y} \quad (\text{two way eccentricity})$$


$$\text{Stress } q = \frac{Q}{A} \pm \frac{Mc}{I} \quad \text{one way eccentricity}$$

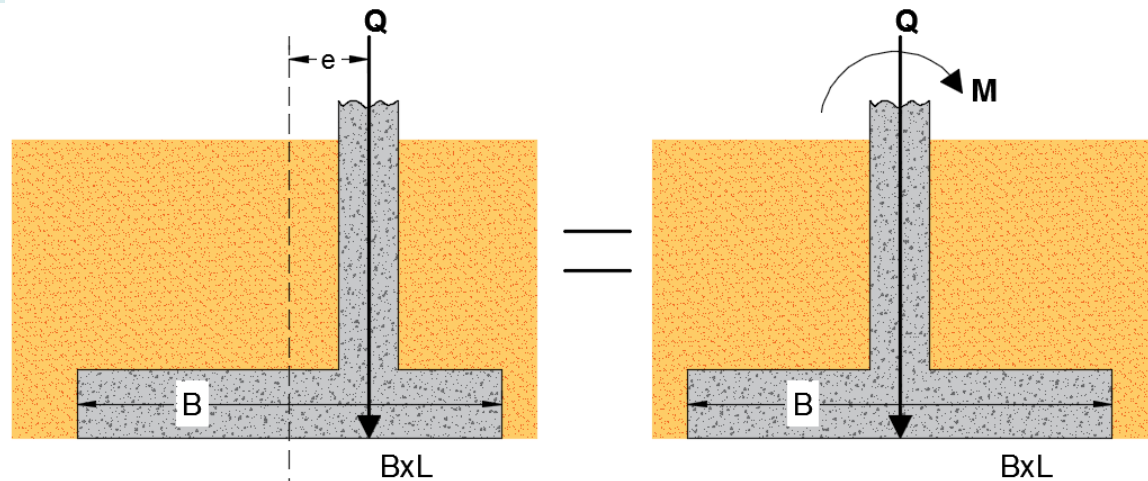

ONE WAY ECCENTRICITY

$$\text{Stress } q = \frac{Q}{A} \pm \frac{Mc}{I}$$

one way eccentricity

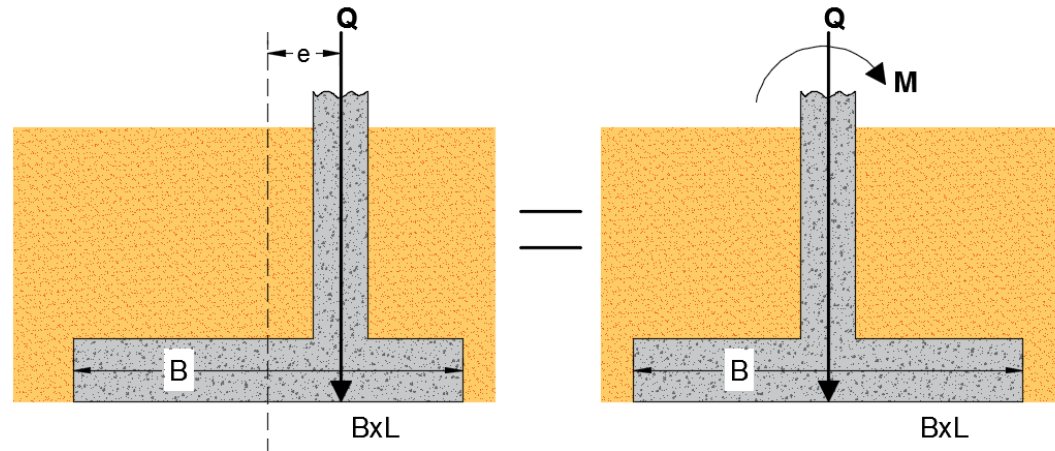

Since the pressure under the foundation is not uniform, there are maximum and minimum pressures (under the two edges of the foundation) and we are concerned about calculating these two pressures.

Assume the eccentricity is in direction of (B)

$$A = B \times L$$

$$M = Q \times e$$

$$c = B/2 \text{ (maximum distance from the center)}$$

$$I = \frac{B^3 L}{12} \quad (\text{I is about the axis that resists the moment})$$

ONE WAY ECCENTRICITY

$$q = \frac{Q}{B^*L} \pm \frac{Q^*e^*B}{\frac{2B^3*L}{12}} = \frac{Q}{B^*L} \pm \frac{Q^*e^*6}{B^2*L}$$
$$q = \frac{Q}{B^*L} \left(1 \pm \frac{6e}{B}\right)$$

There are three cases for calculating maximum and minimum pressures according to the values of (e and B/6)


Case I. (For $e < B/6$):

$$q_{\max} = \frac{Q}{B^*L} \left(1 + \frac{6e}{B}\right)$$
$$q_{\min} = \frac{Q}{B^*L} \left(1 - \frac{6e}{B}\right)$$

If eccentricity in (L) direction (For $e < L/6$):

$$q_{\max} = \frac{Q}{B^*L} \left(1 + \frac{6e}{L}\right)$$
$$q_{\min} = \frac{Q}{B^*L} \left(1 - \frac{6e}{L}\right)$$

In this case, q_{\min} is positive

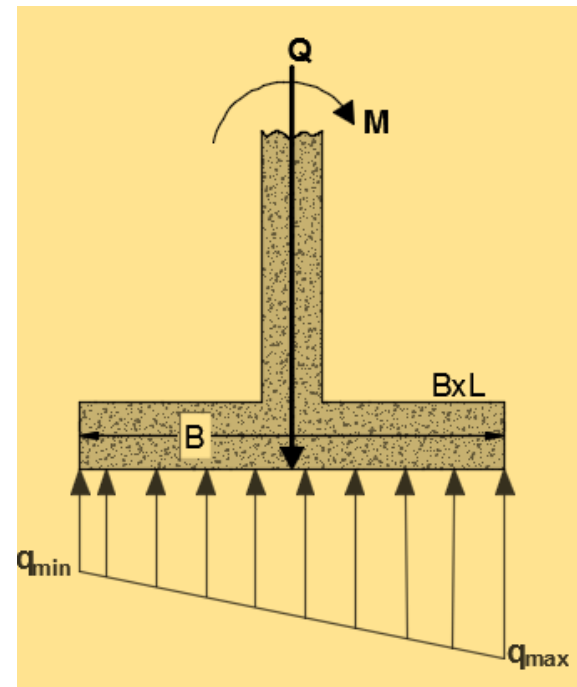


ONE WAY ECCENTRICITY

Case II. (For $e=B/6$):

$$q_{\max} = \frac{Q}{B \cdot L} \left(1 + \frac{6e}{B}\right)$$
$$q_{\min} = \frac{Q}{B \cdot L} (1 - 1) = 0$$

If eccentricity in (L) direction (For $e= L/6$):


$$q_{\max} = \frac{Q}{B \cdot L} \left(1 + \frac{6e}{L}\right)$$
$$q_{\min} = \frac{Q}{B \cdot L} (1 - 1) = 0$$

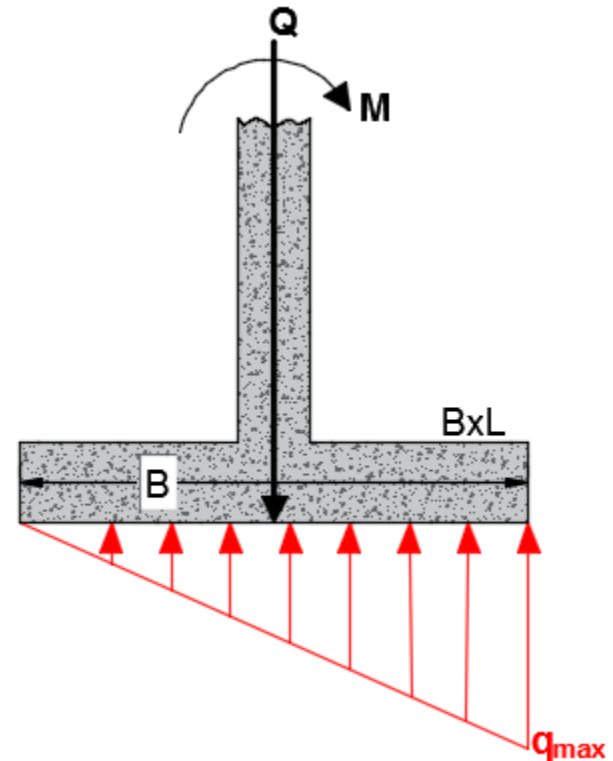

ONE WAY ECCENTRICITY

Case III. (For $e > B/6$):

As shown in the figure, the value of (q_{\min}) is negative (i.e. tension in soil), but we know that soil can't resist any tension, thus, negative pressure must be prevented by making ($q_{\min}=0$) at distance (x) from point (A) as shown in the figure, and determine the new value of (q_{\max}) by static equilibrium as following:

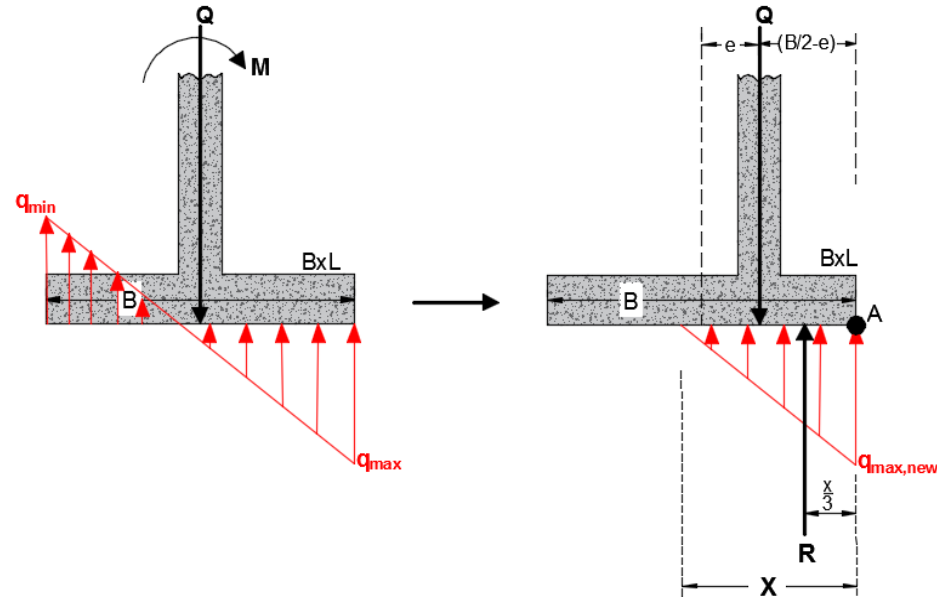

$R = \text{area of triangle} \cdot L$

$$= 0.5 \cdot q_{\max, \text{new}} \cdot X \cdot L \quad (1)$$

$$\Sigma F_y = 0.0 \rightarrow R = Q \quad (2)$$

$$\Sigma M @ A = 0.0 \rightarrow Q \cdot (B/2 - e) = R \cdot X/3$$

$$(\text{but from Eq. 2} \rightarrow R = Q) \rightarrow X = 3(B/2 - e)$$

Substitute by X in Eq. (1) \rightarrow

$$R = Q = 0.5 \cdot q_{\max, \text{new}} \cdot 3(B/2 - e) \cdot L$$

$$\rightarrow q_{\max, \text{new}} = 4Q / [3L(B - 2e)]$$

ONE WAY ECCENTRICITY

Case III. (For $e > B/6$):

**If eccentricity in (L) direction
(For $e > L/6$):**

$$q_{\max, \text{new}} = 4Q/[3B(L-2e)]$$

Note:

If the foundation is circular


$$q = \frac{Q}{A} \pm \frac{Mc}{I}$$

$$A = \frac{\pi D^2}{4}$$

$$c = \frac{D}{2}$$

$$I = \frac{\pi D^4}{64}$$

Calculate q_{\max} and q_{\min}

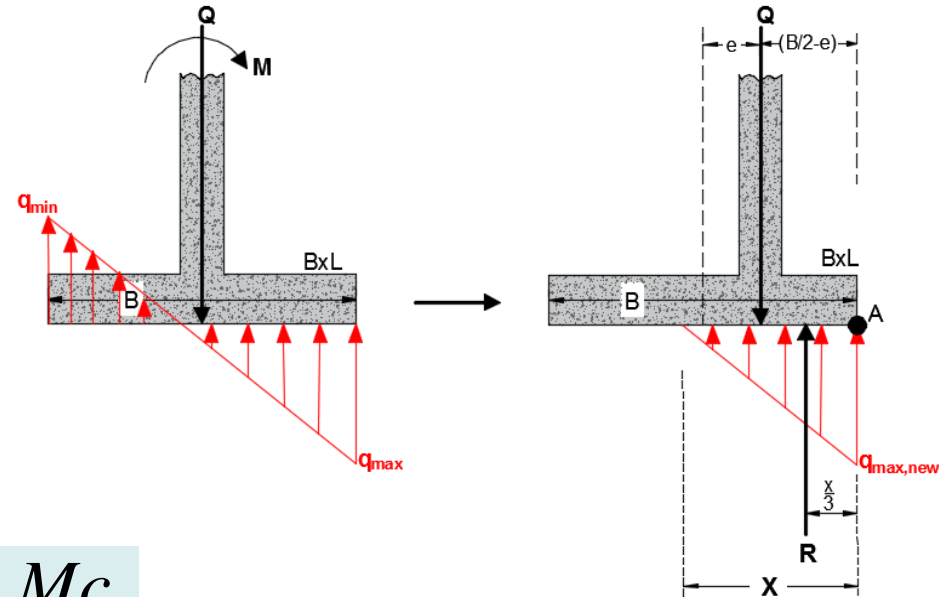

Ultimate Bearing Capacity under Eccentric Loading One-Way Eccentricity

Effective Area Method:

If the load does not exist in the center of the foundation, or if the foundation located to moment in addition to the vertical loads, the stress distribution under the foundation is not uniform. So, to calculate the ultimate (uniform) bearing capacity under the foundation, new area should be determined to make the applied load in the center of this area and to develop uniform pressure under this new area. This new area is called Effective area.

Ultimate Bearing Capacity under Eccentric Loading One-Way Eccentricity

Effective Area Method (Meyerhoff, 1953)

In 1953, Meyerhof proposed a theory that is generally referred to as the *effective area method*.

The following is a step-by-step procedure for determining the ultimate load that the soil can support and the factor of safety against bearing capacity failure:

Step 1. Determine the effective dimensions of the foundation (Figure 4.19a):

$$B' = \text{effective width} = B - 2e$$

$$L' = \text{effective length} = L$$

Note that if the eccentricity were in the direction of the length of the foundation, the value of L' would be equal to $L - 2e$. The value of B' would equal B . The smaller of the two dimensions (i.e., L' and B') is the effective width of the foundation.

Step 2. Use Eq. (4.26) for the ultimate bearing capacity:

$$q'_u = c'N_cF_{cs}F_{cd}F_{ci} + qN_qF_{qs}F_{qd}F_{qi} + \frac{1}{2}\gamma B'N_\gamma F_{\gamma s}F_{\gamma d}F_{\gamma i} \quad (4.51)$$

To evaluate F_{cs} , F_{qs} , and $F_{\gamma s}$, use the relationships given in Table 4.3 with *effective length* and *effective width* dimensions instead of L and B , respectively. To determine F_{cd} , F_{qd} , and $F_{\gamma d}$, use the relationships given in Table 4.3. However, do not replace B with B' .

Step 3. The total ultimate load that the foundation can sustain is

$$Q_u = \frac{A'}{q'_u(B')(L')} \quad (4.52)$$

where $A' = \text{effective area}$.

Ultimate Bearing Capacity under Eccentric Loading One-Way Eccentricity

Step 4. The factor of safety against bearing capacity failure is

$$FS = \frac{Q_u}{Q}$$

It is important to note that q'_u is the ultimate bearing capacity of a foundation of width $B' = B - 2e$ with a centric load (Figure 4.19a). However, the actual distribution of soil reaction at ultimate load will be of the type shown in Figure 4.19b. In Figure 4.19b, $q_{u(e)}$ is the average load per unit area of the foundation. Thus,

$$q_{u(e)} = \frac{q'_u(B - 2e)}{B} \quad (4.53)$$

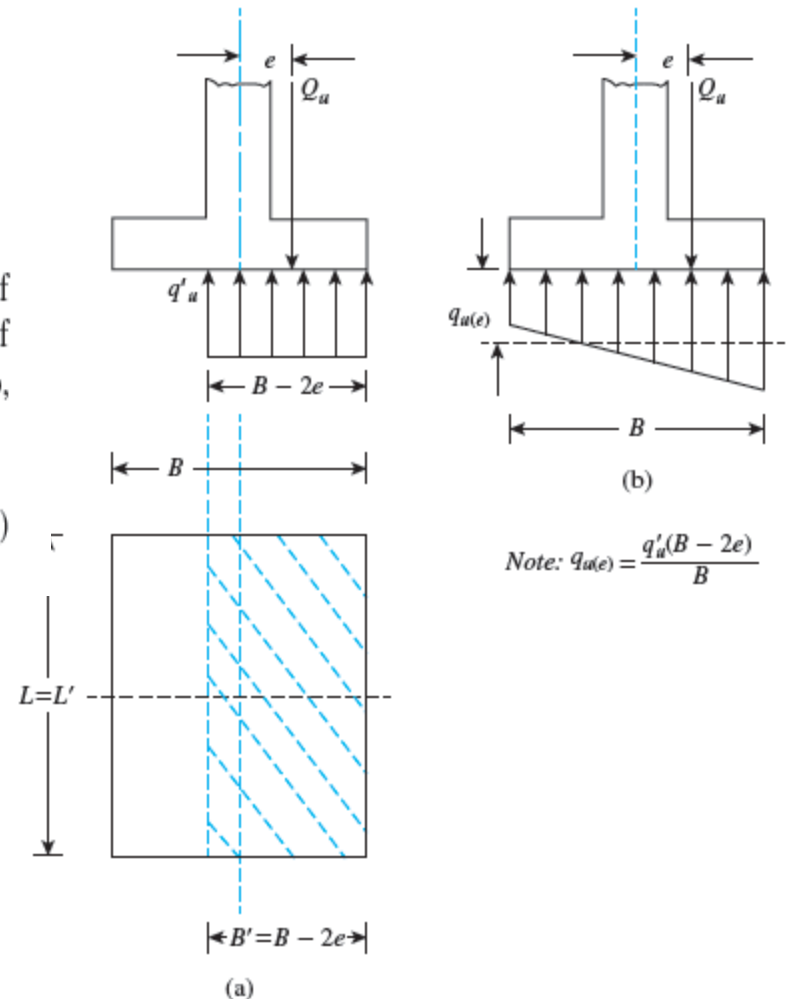


Figure 4.19 Definition of q'_u and $q_{u(e)}$

EXAMPLE 4.7

Example 4.7

A continuous foundation is shown in Figure 4.23. If the load eccentricity is 0.2 m, determine the ultimate load, Q_u , per unit length of the foundation. Use Meyerhof's effective area method.

Solution

For $c' = 0$, Eq. (4.51) gives

$$q'_u = q N_q F_{qs} F_{qd} F_{qi} + \frac{1}{2} \gamma' B' N_\gamma F_{\gamma s} F_{\gamma d} F_{\gamma i}$$

where $q = (16.5)(1.5) = 24.75 \text{ kN/m}^2$.

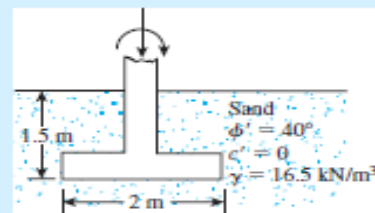


Figure 4.23 A continuous foundation with load eccentricity

For $\phi' = 40^\circ$, from Table 4.2, $N_q = 64.2$ and $N_\gamma = 109.41$. Also,

$$B' = 2 - (2)(0.2) = 1.6 \text{ m}$$

Because the foundation in question is a continuous foundation, B'/L' is zero. Hence, $F_{qs} = 1$, $F_{\gamma s} = 1$. From Table 4.3,

$$F_{qi} = F_{\gamma i} = 1$$

$$F_{qd} = 1 + 2 \tan \phi' (1 - \sin \phi')^2 \frac{D_f}{B} = 1 + 0.214 \left(\frac{1.5}{2} \right) = 1.16$$

$$F_{\gamma d} = 1$$

and

$$\begin{aligned} q'_u &= (24.75)(64.2)(1)(1.16)(1) \\ &\quad + \left(\frac{1}{2} \right) (16.5)(1.6)(109.41)(1)(1)(1) = 3287.39 \text{ kN/m}^2 \end{aligned}$$

Consequently,

$$Q_u = (B')(1)(q'_u) = (1.6)(1)(3287.39) \approx \mathbf{5260 \text{ kN}}$$

Ultimate Bearing Capacity under Eccentric Loading Two-Way Eccentricity

This condition is equivalent to a load Q_u placed eccentrically on the foundation with $x = e_B$ and $y = e_L$ (Figure 4.24d). Note that

$$e_B = \frac{M_y}{Q_u} \quad (4.65)$$

and

$$e_L = \frac{M_x}{Q_u} \quad (4.66)$$

If Q_u is needed, it can be obtained from Eq. (4.52); that is,

$$Q_u = q'_u A'$$

where, from Eq. (4.51),

$$q'_u = c' N_c F_{cs} F_{cd} F_{ci} + q N_q F_{qs} F_{qd} F_{qi} + \frac{1}{2} \gamma B' N_\gamma F_{\gamma s} F_{\gamma d} F_{\gamma i}$$

and

$$A' = \text{effective area} = B' L'$$

As before, to evaluate F_{cs} , F_{qs} , and $F_{\gamma s}$ (Table 4.3), we use the effective length L' and effective width B' instead of L and B , respectively. To calculate F_{cd} , F_{qd} , and $F_{\gamma d}$, we do not replace B with B' . In determining the effective area A' , effective width B' , and effective length L' , five possible cases may arise (Highter and Anders, 1985).

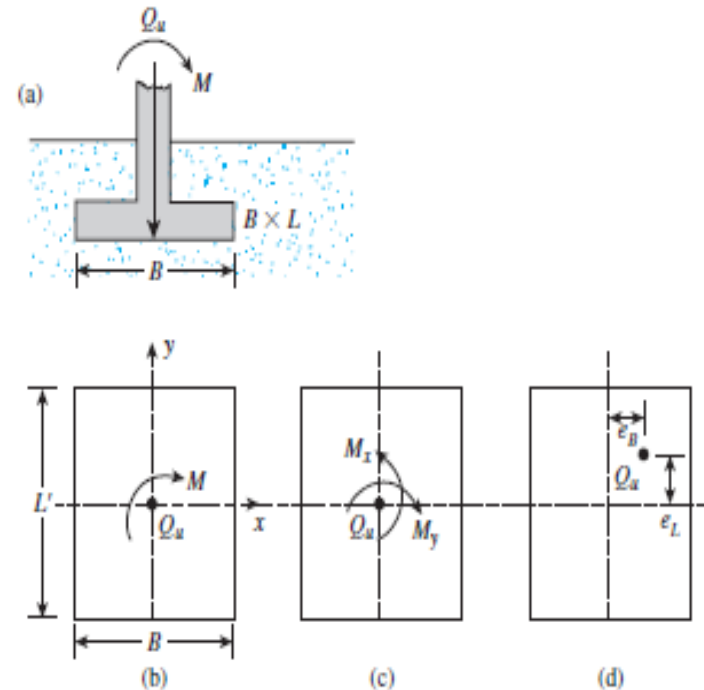


Figure 4.24 Analysis of foundation with two-way eccentricity

Ultimate Bearing Capacity under Eccentric Loading Two-Way Eccentricity

Case I. $e_L/L \geq \frac{1}{6}$ and $e_B/B \geq \frac{1}{6}$. The effective area for this condition is shown in Figure 4.25, or

$$A' = \frac{1}{2}B_1L_1 \quad (4.67)$$

where

$$B_1 = B \left(1.5 - \frac{3e_B}{B} \right) \quad (4.68)$$

and

$$L_1 = L \left(1.5 - \frac{3e_L}{L} \right) \quad (4.69)$$

The effective length L' is the larger of the two dimensions B_1 and L_1 . So the effective width is

$$B' = \frac{A'}{L'} \quad (4.70)$$

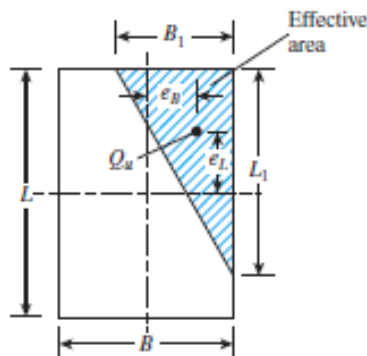


Figure 4.25 Effective area for the case of $e_L/L \geq \frac{1}{6}$ and $e_B/B \geq \frac{1}{6}$

Ultimate Bearing Capacity under Eccentric Loading Two-Way Eccentricity

Case II. $e_L/L < 0.5$ and $0 < e_B/B < \frac{1}{6}$. The effective area for this case, shown in Figure 4.26a, is

$$A' = \frac{1}{2}(L_1 + L_2)B \quad (4.71)$$

The magnitudes of L_1 and L_2 can be determined from Figure 4.26b. The effective width is

$$B' = \frac{A'}{L_1 \text{ or } L_2 \text{ (whichever is larger)}} \quad (4.72)$$

The effective length is

$$L' = L_1 \text{ or } L_2 \text{ (whichever is larger)} \quad (4.73)$$

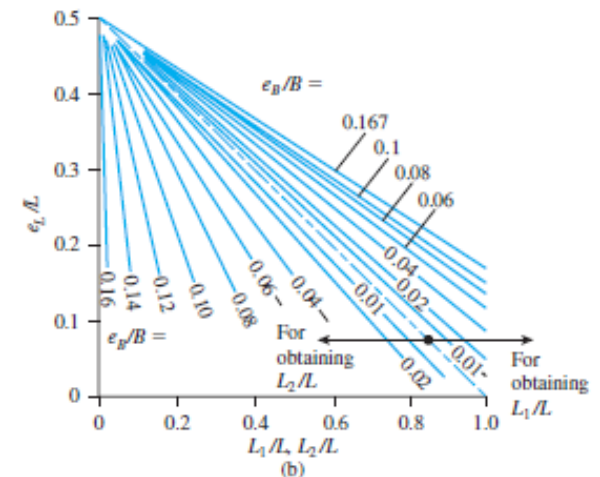
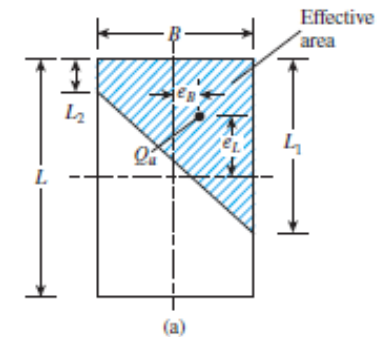


Figure 4.26 Effective area for the case of $e_L/L < 0.5$ and $0 < e_B/B < \frac{1}{6}$

Ultimate Bearing Capacity under Eccentric Loading Two-Way Eccentricity

Case III. $e_L/L < \frac{1}{6}$ and $0 < e_B/B < 0.5$. The effective area, shown in Figure 4.27a, is

$$A' = \frac{1}{2}(B_1 + B_2)L \quad (4.74)$$

The effective width is

$$B' = \frac{A'}{L} \quad (4.75)$$

The effective length is

$$L' = L \quad (4.76)$$

The magnitudes of B_1 and B_2 can be determined from Figure 4.27b.

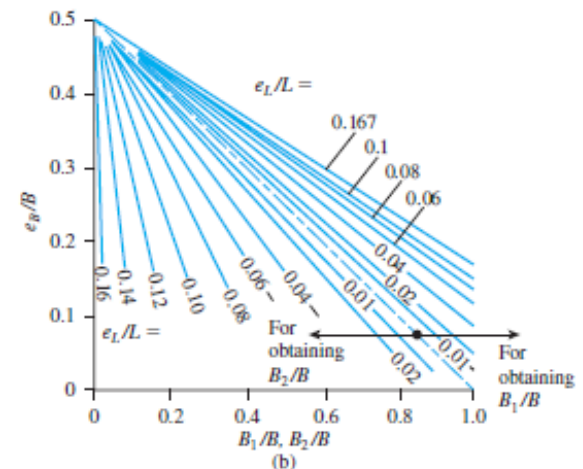
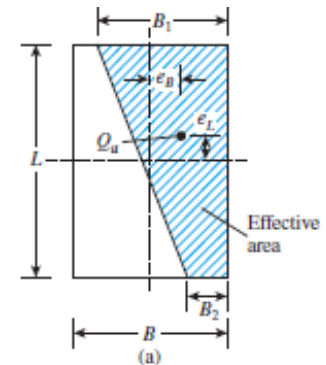


Figure 4.27 Effective area for the case of $e_L/L < \frac{1}{6}$ and $0 < e_B/B < 0.5$

Ultimate Bearing Capacity under Eccentric Loading Two-Way Eccentricity

Case IV. $e_L/L < \frac{1}{6}$ and $e_B/B < \frac{1}{6}$. Figure 4.28a shows the effective area for this case. The ratio B_2/B , and thus B_2 , can be determined by using the e_L/L curves that slope upward. Similarly, the ratio L_2/L , and thus L_2 , can be determined by using the e_B/B curves that slope downward. The effective area is then

$$A' = L_2 B + \frac{1}{2}(B + B_2)(L - L_2) \quad (4.77)$$

The effective width is

$$B' = \frac{A'}{L}$$

The effective length is

$$L' = L$$

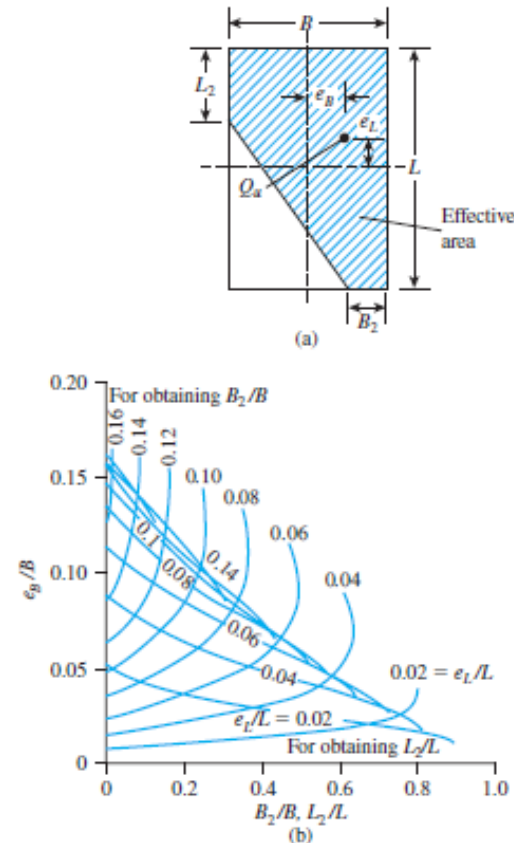


Figure 4.28 Effective area for the case of $e_L/L < \frac{1}{6}$ and $e_B/B < \frac{1}{6}$ (Based on Hightler, W. H. and Anders, J. C. (1985). "Dimensioning Footings Subjected to Eccentric Loads," *Journal of Geotechnical Engineering*, American Society of Civil Engineers, Vol. 111, No. GT5, pp. 659–665.)

Ultimate Bearing Capacity under Eccentric Loading Two-Way Eccentricity

Case V. (Circular Foundation) In the case of circular foundations under eccentric loading (Figure 4.29a), the eccentricity is always one way. The effective area A' and the effective width B' for a circular foundation are given in a nondimensional form in Table 4.10. Once A' and B' are determined, the effective length can be obtained as

$$L' = \frac{A'}{B'} \quad (4.80)$$

Table 4.10 Variation of A'/R^2 and B'/R with e_R/R for Circular Foundations

e_R/R	A'/R^2	B'/R
0.1	2.8	1.85
0.2	2.4	1.32
0.3	2.0	1.2
0.4	1.61	0.80
0.5	1.23	0.67
0.6	0.93	0.50
0.7	0.62	0.37
0.8	0.35	0.23
0.9	0.12	0.12
1.0	0	0

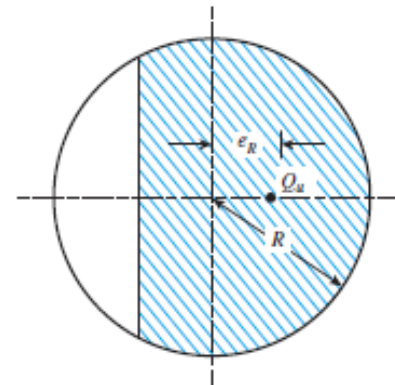


Figure 4.29 Effective area for circular foundation

EXAMPLE 4.10

Example 4.10

A square foundation is shown in Figure 4.30, with $e_L = 0.3$ m and $e_B = 0.15$ m. Assume two-way eccentricity, and determine the ultimate load, Q_u .

Solution

We have

$$\frac{e_L}{L} = \frac{0.3}{1.5} = 0.2$$

and

$$\frac{e_B}{B} = \frac{0.15}{1.5} = 0.1$$

This case is similar to that shown in Figure 4.26a. From Figure 4.26b, for $e_L/L = 0.2$ and $e_B/B = 0.1$,

$$\frac{L_1}{L} \approx 0.85; \quad L_1 = (0.85)(1.5) = 1.275 \text{ m}$$

and

$$\frac{L_2}{L} \approx 0.21; \quad L_2 = (0.21)(1.5) = 0.315 \text{ m}$$

From Eq. (4.71),

$$A' = \frac{1}{2}(L_1 + L_2)B = \frac{1}{2}(1.275 + 0.315)(1.5) = 1.193 \text{ m}^2$$

From Eq. (4.73),

$$L' = L_1 = 1.275 \text{ m}$$

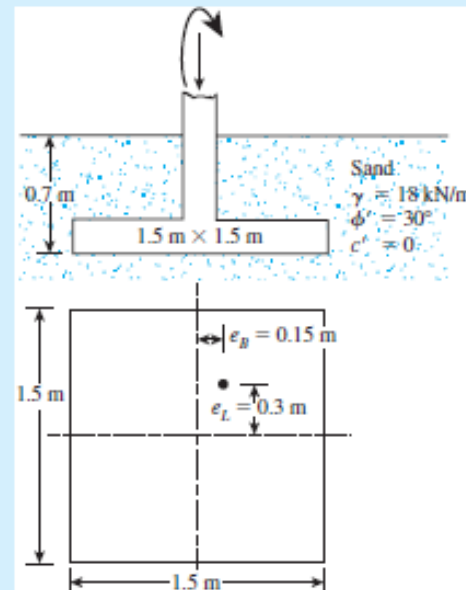


Figure 4.30 An eccentrically loaded foundation

From Eq. (4.72),

$$B' = \frac{A'}{L'} = \frac{1.193}{1.275} = 0.936 \text{ m}$$

Note from Eq. (4.51) with $c' = 0$,

$$q'_a = qN_q F_{qs} F_{qd} F_{q\gamma} + \frac{1}{2} \gamma B' N_{\gamma} F_{\gamma s} F_{\gamma d} F_{\gamma \gamma}$$

where $q = (0.7)(18) = 12.6 \text{ kN/m}^2$.

EXAMPLE 4.10

For $\phi' = 30^\circ$, from Table 4.2, $N_q = 18.4$ and $N_\gamma = 22.4$. Thus from Table 4.3,

$$F_{qs} = 1 + \left(\frac{B'}{L'}\right) \tan \phi' = 1 + \left(\frac{0.936}{1.275}\right) \tan 30^\circ = 1.424$$

$$F_{\gamma s} = 1 - 0.4 \left(\frac{B'}{L'}\right) = 1 - 0.4 \left(\frac{0.936}{1.275}\right) = 0.706$$

$$F_{qd} = 1 + 2 \tan \phi' (1 - \sin \phi')^2 \frac{D_f}{B} = 1 + \frac{(0.289)(0.7)}{1.5} = 1.135$$

and

$$F_{\gamma d} = 1$$

So

$$\begin{aligned} Q_u &= A' q'_u = A' (q N_q F_{qs} F_{qd} + \frac{1}{2} \gamma B' N_\gamma F_{\gamma s} F_{\gamma d}) \\ &= (1.193)[(12.6)(18.4)(1.424)(1.135) \\ &\quad + (0.5)(18)(0.936)(22.4)(0.706)(1)] \approx \mathbf{606 \text{ kN}} \end{aligned}$$

EXAMPLE 4.11

Example 4.11

Consider the foundation shown in Figure 4.30 with the following changes:

$$e_L = 0.18 \text{ m}$$

$$e_B = 0.12 \text{ m}$$

For the soil, $\gamma = 16.5 \text{ kN/m}^3$

$$\phi' = 25^\circ$$

$$c' = 25 \text{ kN/m}^2$$

Determine the ultimate load, Q_u .

Solution

$$\frac{e_L}{L} = \frac{0.18}{1.5} = 0.12; \quad \frac{e_B}{B} = \frac{0.12}{1.5} = 0.08$$

This is the case shown in Figure 4.28a. From Figure 4.28b,

$$\frac{B_2}{B} \approx 0.1; \quad \frac{L_2}{L} \approx 0.32$$

So

$$B_2 = (0.1)(1.5) = 0.15 \text{ m}$$


$$L_2 = (0.32)(1.5) = 0.48 \text{ m}$$

From Eq. (4.77),

$$\begin{aligned} A' &= L_2 B + \frac{1}{2}(B + B_2)(L - L_2) = (0.48)(1.5) + \frac{1}{2}(1.5 + 0.15)(1.5 - 0.48) \\ &= 0.72 + 0.8415 = 1.5615 \text{ m}^2 \end{aligned}$$

$$B' = \frac{A'}{L} = \frac{1.5615}{1.5} = 1.041 \text{ m}$$

$$L' = 1.5 \text{ m}$$

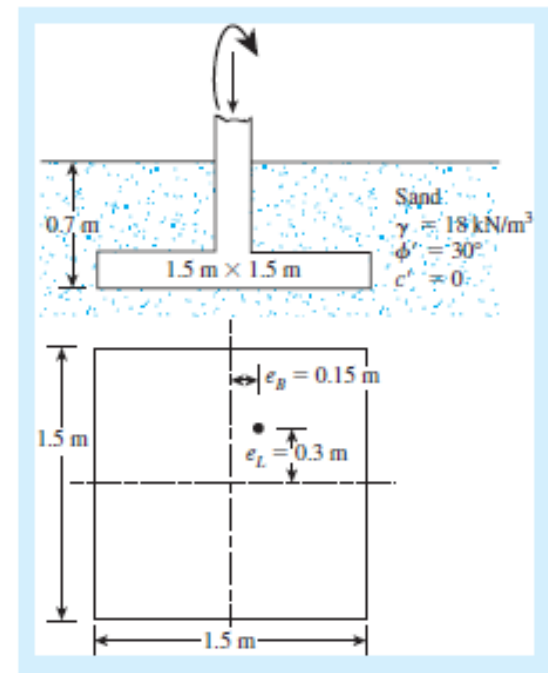

EXAMPLE 4.11

From Eq. (4.51),

$$q'_a = c' N_c F_{ca} F_{ca} + q N_q F_{qa} F_{qa} + \frac{1}{2} \gamma B' N_\gamma F_{\gamma a} F_{\gamma a}$$

For $\phi' = 25^\circ$, Table 4.2 gives $N_c = 20.72$, $N_q = 10.66$ and $N_\gamma = 10.88$. From Table 4.3,

$$F_{ca} = 1 + \left(\frac{B'}{L'} \right) \left(\frac{N_q}{N_c} \right) = 1 + \left(\frac{1.041}{1.5} \right) \left(\frac{10.66}{20.72} \right) = 1.357$$

$$F_{qa} = 1 + \left(\frac{B'}{L'} \right) \tan \phi' = 1 + \left(\frac{1.041}{1.5} \right) \tan 25 = 1.324$$

$$F_{\gamma a} = 1 - 0.4 \left(\frac{B'}{L'} \right) = 1 - 0.4 \left(\frac{1.041}{1.5} \right) = 0.722$$

$$F_{qa} = 1 + 2 \tan \phi' (1 - \sin \phi')^2 \left(\frac{D_f}{B} \right) = 1 + 2 \tan 25 (1 - \sin 25)^2 \left(\frac{0.7}{1.5} \right) = 1.145$$

$$F_{ca} = F_{qa} - \frac{1 - F_{qa}}{N_c \tan \phi'} = 1.145 - \frac{1 - 1.145}{20.72 \tan 25} = 1.16$$

$$F_{\gamma a} = 1$$

Hence,

$$\begin{aligned} q'_a &= (25)(20.72)(1.357)(1.16) + (16.5 \times 0.7)(10.66)(1.324)(1.145) \\ &\quad + \frac{1}{2}(16.5)(1.041)(10.88)(0.722)(1) \\ &= 815.39 + 186.65 + 67.46 = 1069.5 \text{ kN/m}^2 \\ Q_a &= A' q'_a = (1069.5)(1.5615) = \mathbf{1670 \text{ kN}} \end{aligned}$$

IMPORTANT NOTES

1. The soil above the bottom of the foundation are used only to calculate the term (q) in the second term of bearing capacity equations (Terzaghi and Meyerhof) and all other factors are calculated for the underlying soil.
2. Always the value of (q) is the effective stress at the level of the bottom of the foundation.
3. For the underlying soil, if the value of $(c=\text{cohesion}=0.0)$ you don't have to calculate factors in the first term in equations (N_c in Terzaghi's equations) and ($N_c, F_{cs}, F_{cd}, F_{ci}$ in Meyerhof equation).
4. For the underlying soil, if the value of $(\phi=0.0)$ you don't have to calculate factors in the last term in equations (N_γ in Terzaghi's equations) and ($N_\gamma, F_{\gamma s}, F_{\gamma d}, F_{\gamma i}$ in Meyerhof equation).
5. If the load applied on the foundation is inclined with an angle $(\beta=\phi)$. The value of $(F_{\gamma i})$ will be zero, so you don't have to calculate factors in the last term of Meyerhof equation ($N_\gamma, F_{\gamma s}, F_{\gamma d}$).

IMPORTANT NOTES

6. Always if we want to calculate the eccentricity, it's calculated as following:

$$e = \frac{\text{Overall Moment}}{\text{Vertical Loads}}$$

7. If the foundation is square, strip or circular, you may calculate (q_u) from Terzaghi or Meyerhof equations (should be specified in the problem).

8. But, if the foundation is rectangular, you must calculate (q_u) from Meyerhof general equation.

9. If the foundation width (B) is required, and there exist water table below the foundation at distance (d), you should assume $d \leq B$, and calculate B, then make a check for your assumption.