




Data Structures

ADT List

ADT List

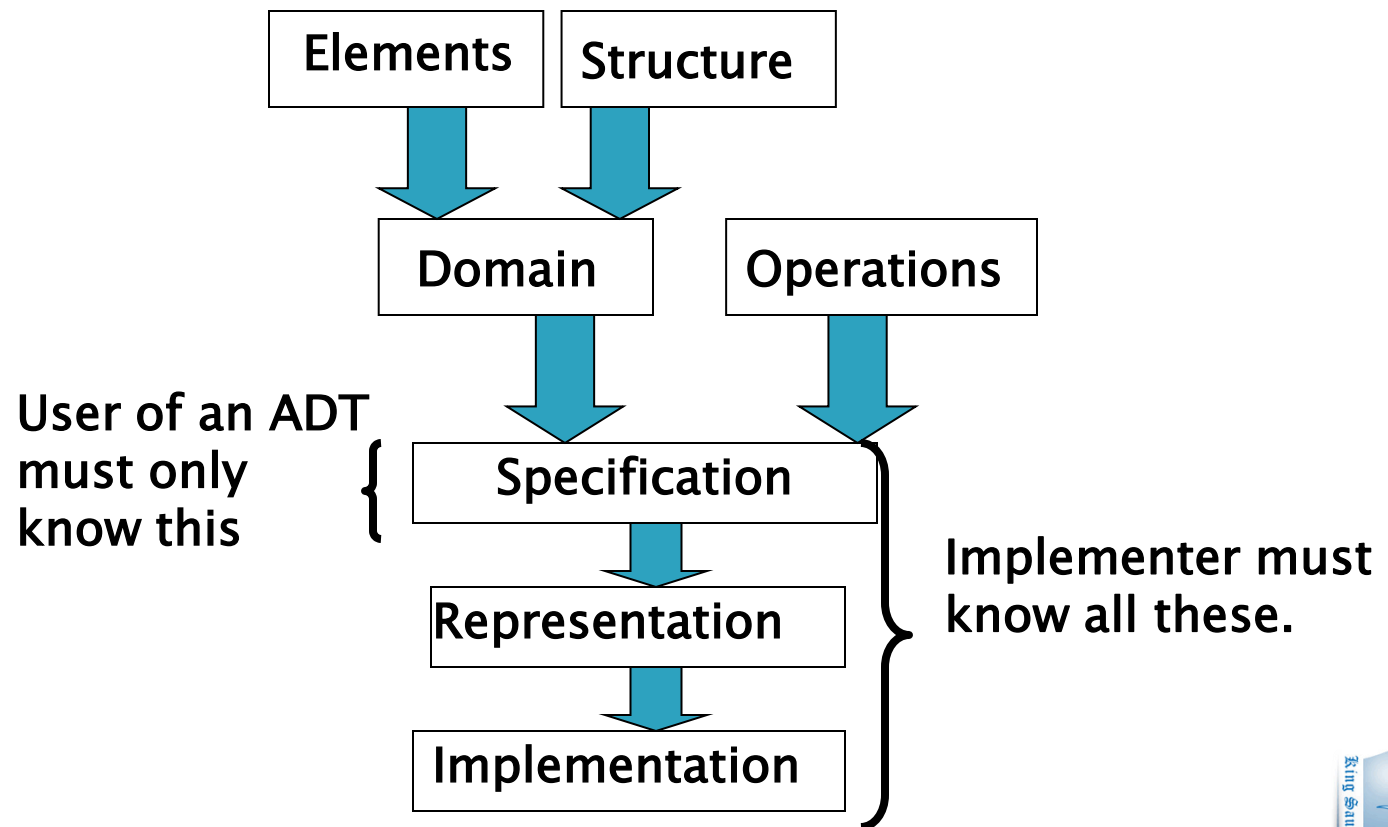

ADT List: Specification

Elements: The elements are of generic type $\langle \text{Type} \rangle$ (The elements are placed in nodes for linked list implementation).

Structure: the elements are linearly arranged. The first element is called head, there is a element called current.

Domain: the number of elements in the list is bounded therefore the domain is finite.
Type name of elements in the domain: List



ADT List: Specification

Operations: We assume all operations operate on a list L.

1. **Method FindFirst ()**
requires: list L is not empty. **input:** none
results: first element set as the current element. **output:** none.
2. **Method FindNext ()**
requires: list L is not empty. Cur is not last. **input:** none
results: element following the current element is made the current element.
output: none.
3. **Method Retrieve (Type e)**
requires: list L is not empty. **input:** none
results: current element is copied into e. **output:** element e.

ADT List: Specification

Operations:

4. **Method Update (Type e).**
requires: list L is not empty. **input:** e.
results: the element e is copied into the current node.
output: none.
5. **Method Insert (Type e).**
requires: list L is not full. **input:** e.
results: a new node containing element e is created and inserted after the current element in the list. The new element e is made the current element. If the list is empty e is also made the head element. **output:** none.

ADT List: Specification

Operations:

6. Method Remove ()

requires: list L is not empty. **input:** none

results: the current element is removed from the list. If the resulting list is empty current is set to NULL. If successor of the deleted element exists it is made the new current element otherwise first element is made the new current element. **output:** none.

7. Method Full (boolean flag)

input: none. **returns:** if the number of elements in L has reached the maximum number allowed then flag is set to true otherwise false. **output:** flag.



ADT List: Specification


Operations:

8. **Method Empty** (boolean flag).
input: none. **results:** if the number of elements in L is zero, then flag is set to true otherwise false.
Output: flag.
9. **Method Last** (boolean flag).
input: none. **requires:** L is not empty. **Results:** if the last element is the current element then flag is set to true otherwise false. **Output:** flag


Representation/Implementation

- ▶ Programmers have to deal with the questions:
 - How to represent lists? Storage structure affects the efficiency of the operations.
 - How to implement the operations? Algorithm chosen must be efficient.
- ▶ Lists can be represented as
 - Linked List
 - Array based List

List (Linked List)

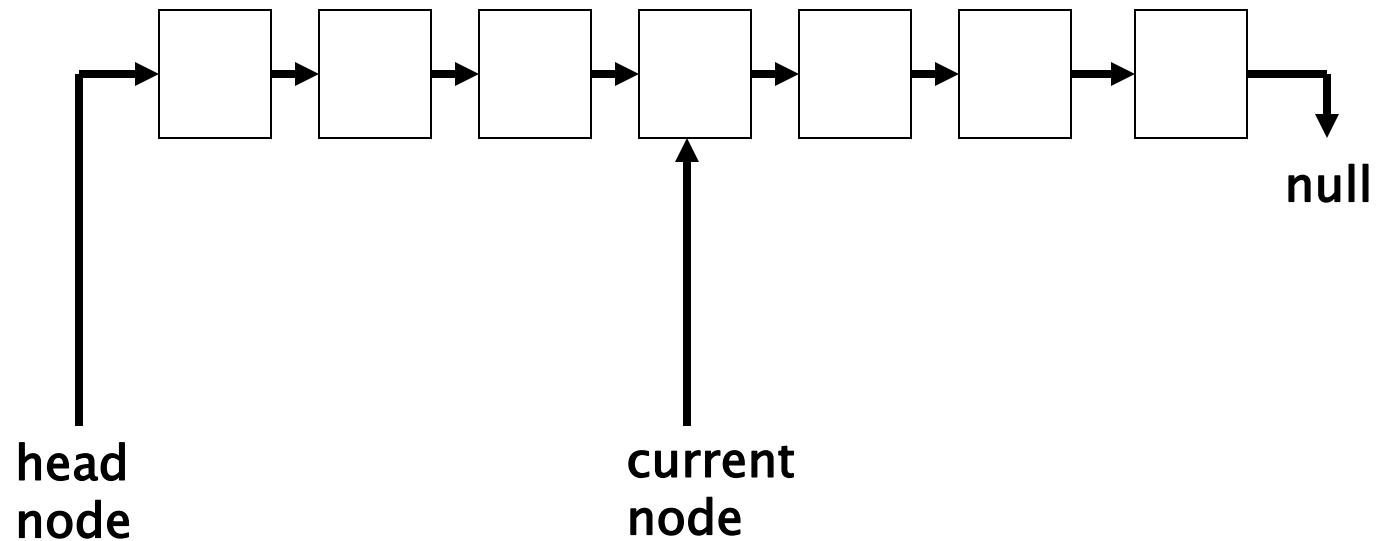

List (Array Based)

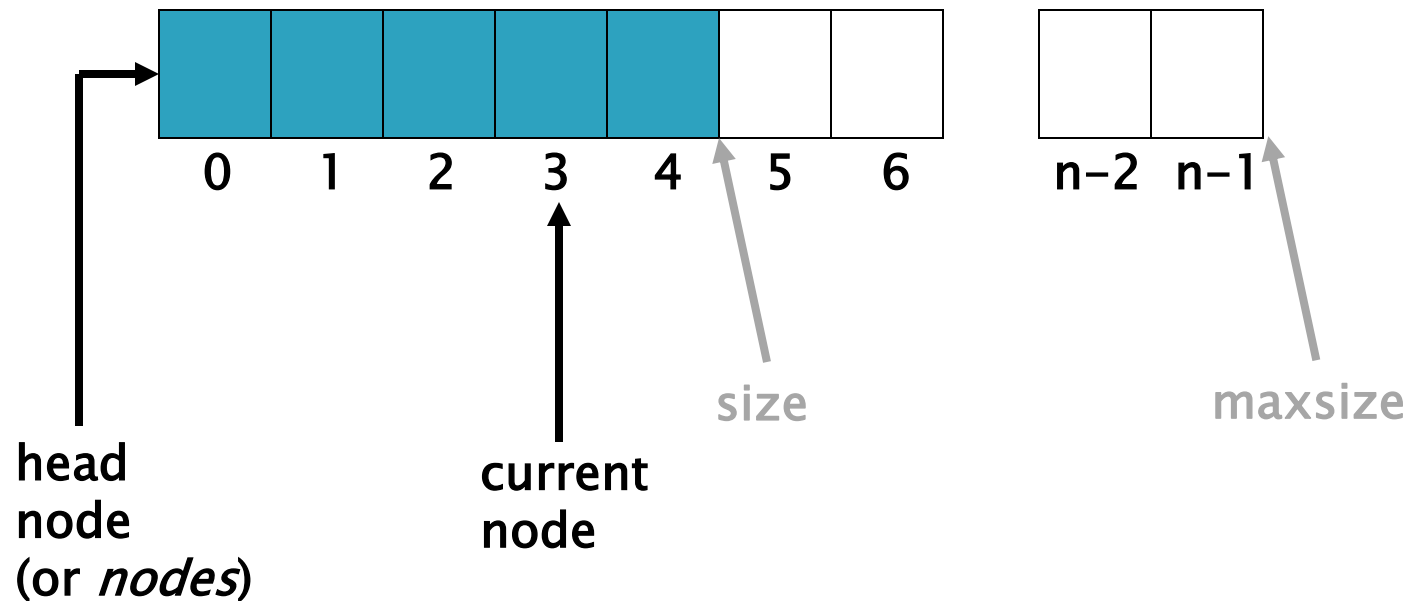

ADT List (Linked List): Element

```
public class Node<T> {  
    public T data;  
    public Node<T> next;  
  
    public Node () {  
        data = null;  
        next = null;  
    }  
  
    public Node (T val) {  
        data = val;  
        next = null;  
    }  
  
    // Setters/Getters...  
}
```

ADT List (Linked List): Representation


```
public class LinkedList<T> {  
    private Node<T> head;  
    private Node<T> current;  
  
    public LinkedList () {  
        head = current = null;  
    }  
  
    public boolean empty () {  
        return head == null;  
    }  
  
    public boolean last () {  
        return current.next == null;  
    }  
}
```



ADT List (Linked List): Representation

```
public class LinkedList<T> {  
    private Node<T> head;  
    private Node<T> current;  
  
    public LinkedList () {  
        head = current = null;  
    }  
  
    public boolean empty () {  
        return head == null;  
    }  
  
    public boolean last () {  
        return current.next == null;  
    }  
}
```

H
↓
null
true



H
↓
 ...
false

ADT List (Linked List): Representation

```
public class LinkedList<T> {  
    private Node<T> head;  
    private Node<T> current;  
  
    public LinkedList () {  
        head = current = null;  
    }  
}
```

```
public boolean empty () {  
    return head == null;  
}
```

```
public boolean last () {  
    return current.next == null;  
}
```

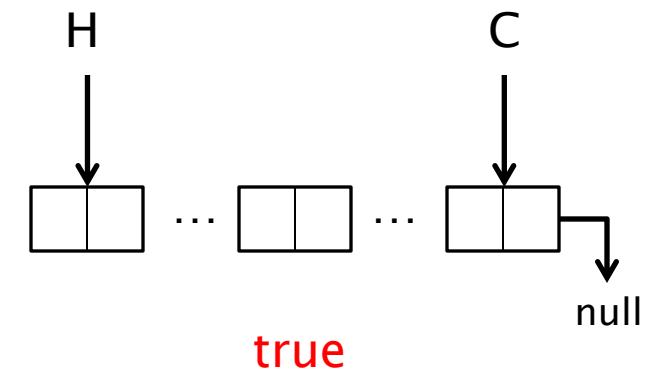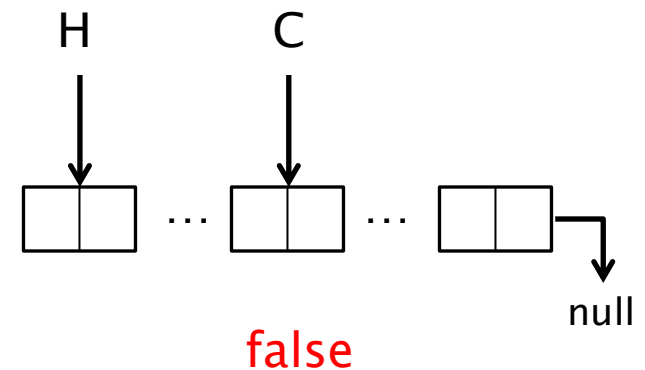


ADT List (Linked List): Implementation

```
public boolean full () {  
    return false;  
}  
public void findfirst () {  
    current = head;  
}  
public void findnext () {  
    current = current.next;  
}  
public T retrieve () {  
    return current.data;  
}  
public void update (T val) {  
    current.data = val;  
}
```




ADT List (Linked List): Implementation

```
public boolean full () {  
    return false;  
}  
public void findfirst () {  
    current = head;  
}  
public void findnext () {  
    current = current.next;  
}  
public T retrieve () {  
    return current.data;  
}  
public void update (T val) {  
    current.data = val;  
}
```

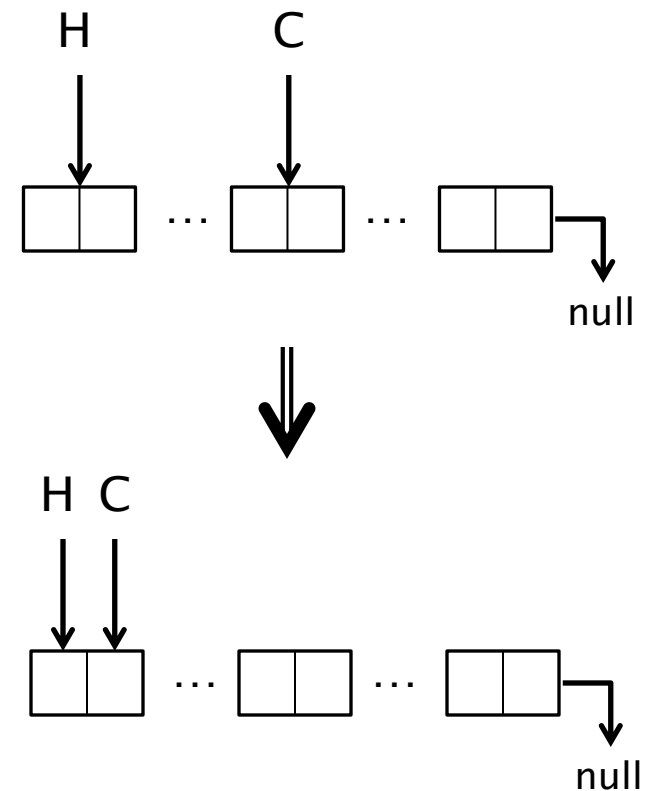


ADT List (Linked List): Implementation

```
public boolean full () {  
    return false;  
}  
public void findfirst () {  
    current = head;  
}  
public void findnext () {  
    current = current.next;  
}  
public T retrieve () {  
    return current.data;  
}  
public void update (T val) {  
    current.data = val;  
}
```

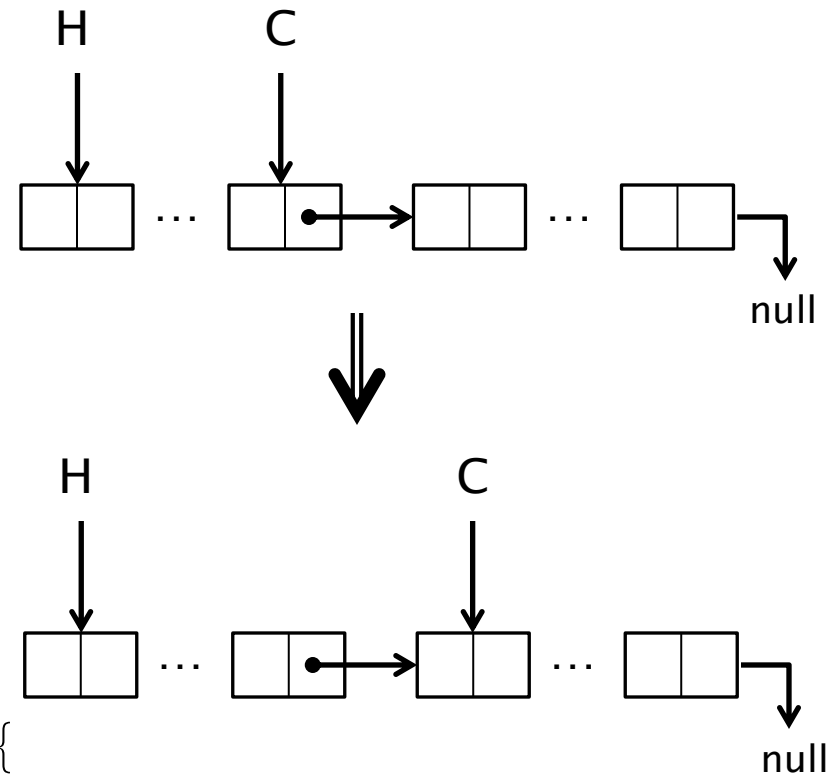


ADT List (Linked List): Implementation

```
public boolean full () {  
    return false;  
}  
public void findfirst () {  
    current = head;  
}  
public void findnext () {  
    current = current.next;  
}  
public T retrieve () {  
    return current.data;  
}  
public void update (T val) {  
    current.data = val;  
}
```

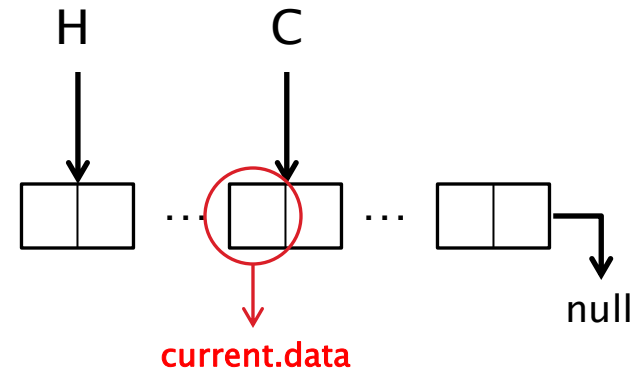

ADT List (Linked List): Implementation

```
public boolean full () {  
    return false;  
}  
public void findfirst () {  
    current = head;  
}  
public void findnext () {  
    current = current.next;  
}  
public T retrieve () {  
    return current.data;  
}  
public void update (T val) {  
    current.data = val;  
}
```

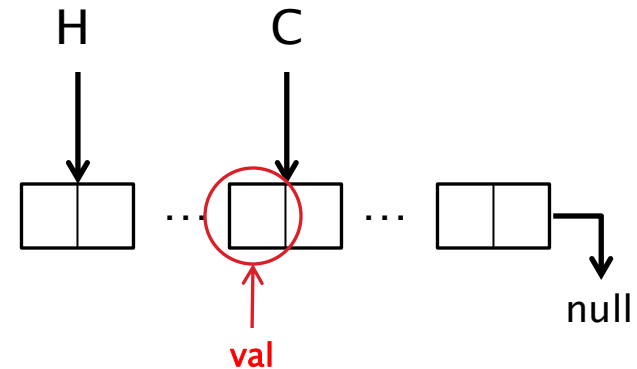


ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #1

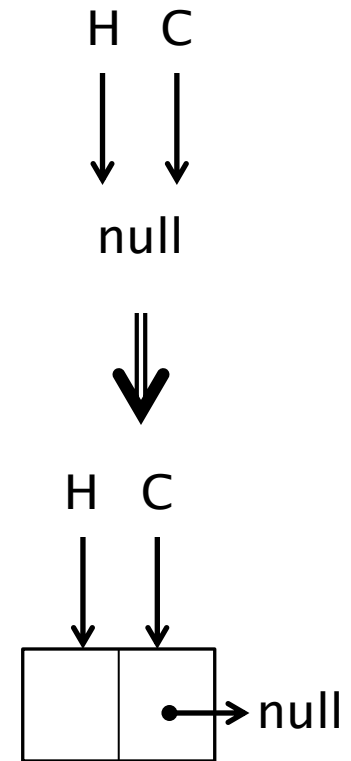

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #2



ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #2



ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #2



ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #2



ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #2



ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #2

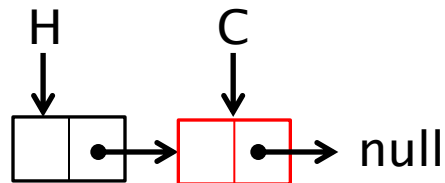

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #3

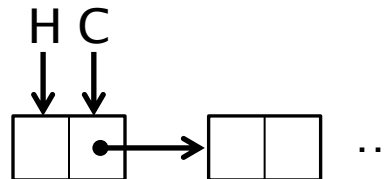

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #3

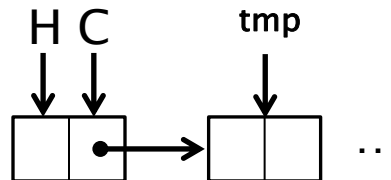

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #3

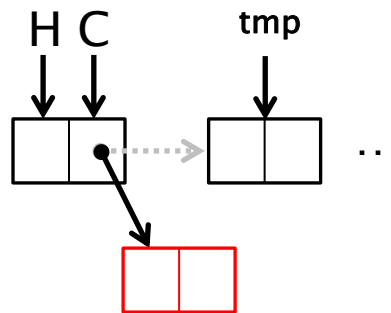

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #3

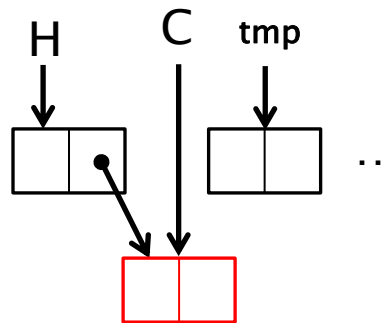

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #3

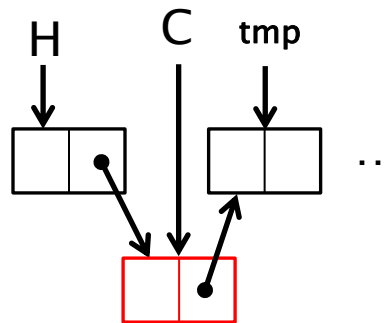

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #3

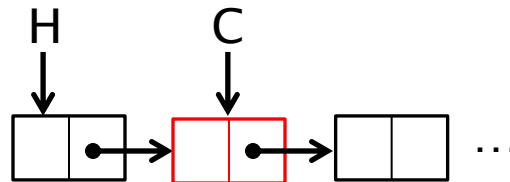

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #4

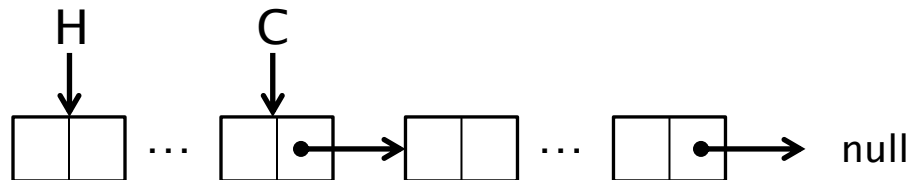

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #4

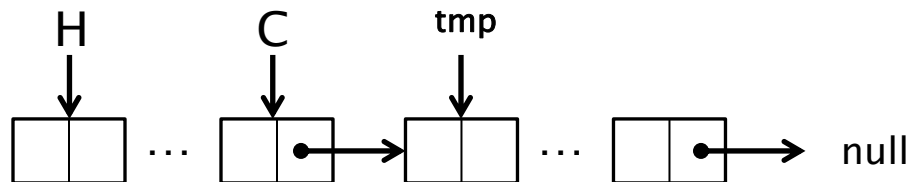

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #4

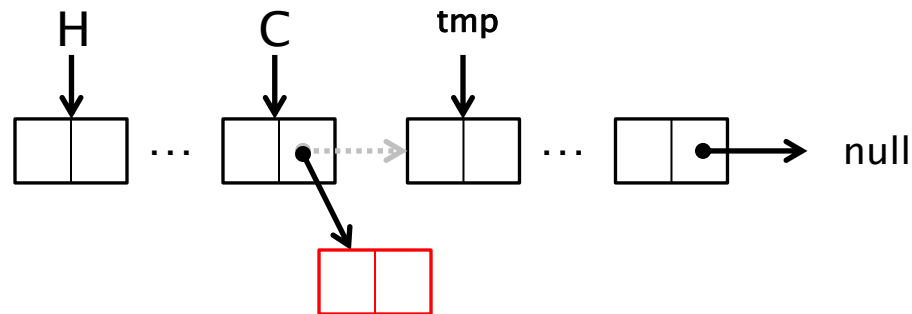

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #4

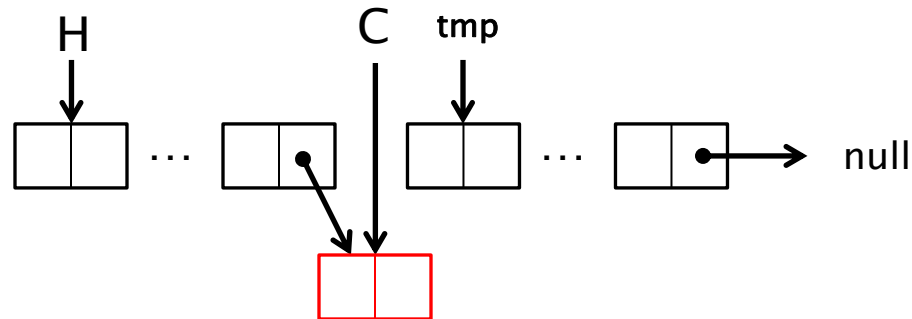

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #4

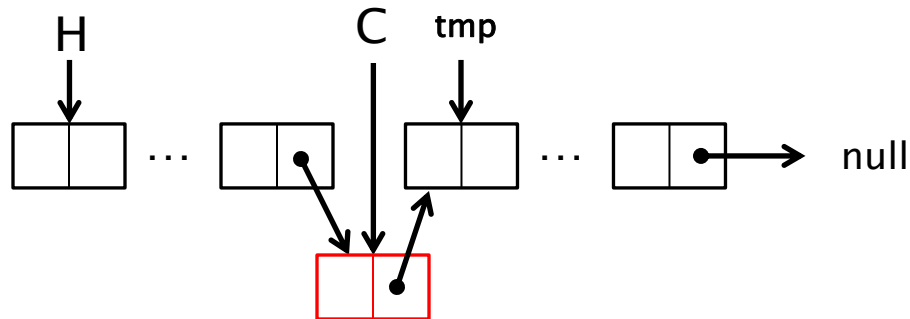

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #4

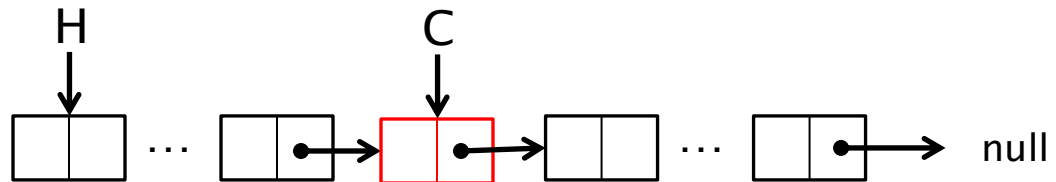

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #5

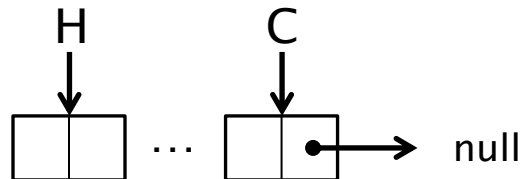

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #5

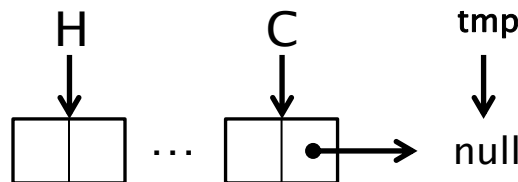

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #5

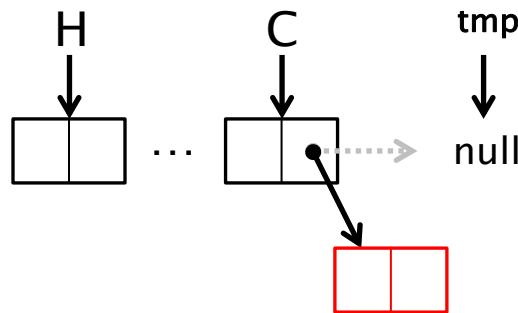

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #5

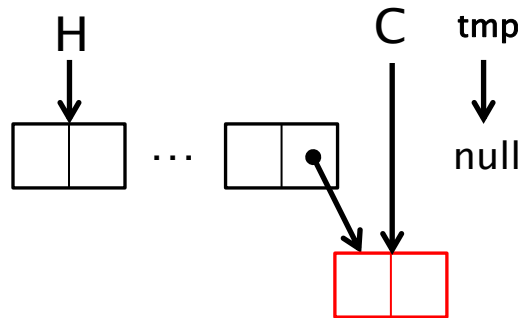

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```


Example #5

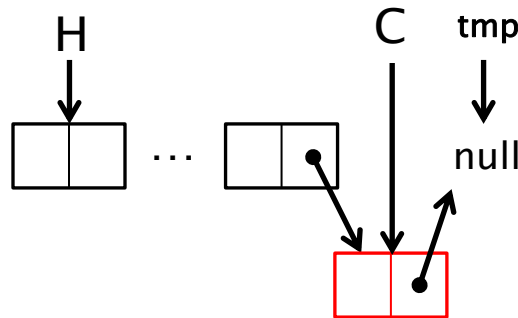

ADT List (Linked List): Implementation

```
public void insert (T val) {  
    Node<T> tmp;  
    if (empty()) {  
        current = head = new Node<T> (val);  
    }  
    else {  
        tmp = current.next;  
        current.next = new Node<T> (val);  
        current = current.next;  
        current.next = tmp;  
    }  
}
```

Example #5

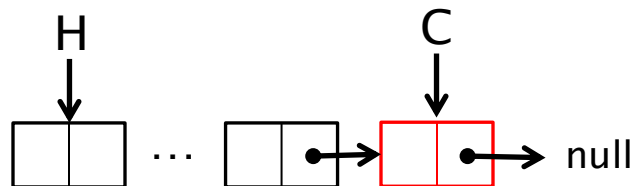


ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```



ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

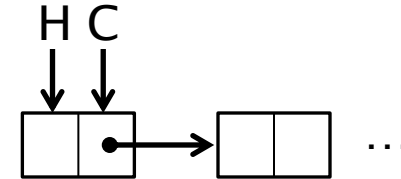

Example #1

ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

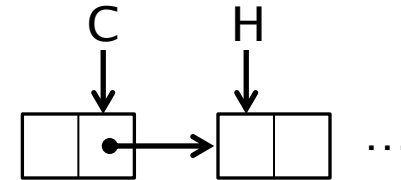

Example #1

ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

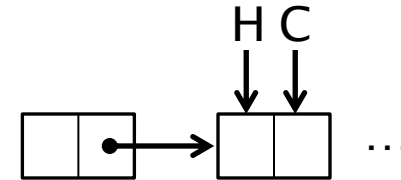

Example #1

ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

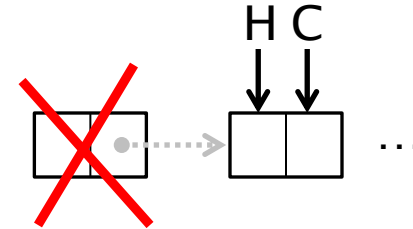

Example #1

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```




Example #1



ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```



Example #2

ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```



Example #2

ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```



Example #2

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```



Example #2

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```


H C
↓ ↓
null

Example #2



ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

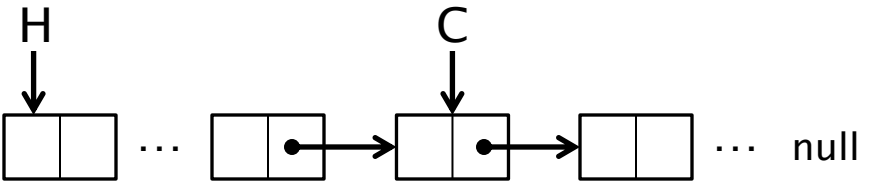


The diagram illustrates a linked list structure. It consists of several nodes, each represented as a box divided into two parts: the left part for data and the right part for the next pointer. The first node is pointed to by an arrow labeled 'H' (head). The second node is pointed to by an arrow labeled 'C' (current). The list continues with an ellipsis (...) and then another node, followed by another ellipsis (...) and finally 'null', indicating the end of the list. Arrows connect the right part of one node to the left part of the next node.

Example #3

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

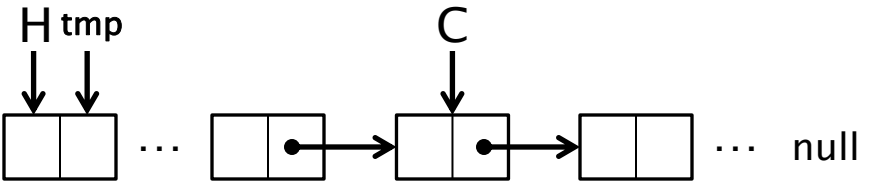

The diagram illustrates a linked list structure. It consists of two nodes, each represented as a rectangle divided into two parts: a data field and a next pointer field. The first node has an arrow labeled 'H' pointing to its data field and an arrow labeled 'tmp' pointing to its next pointer field. The second node has an arrow labeled 'C' pointing to its data field. The next pointer field of the second node points to 'null'. Ellipses (...) are used between the first and second nodes, and after the second node, to indicate the continuation of the list structure.

Example #3

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }
```

```
    else {
```

```
        Node<T> tmp = head;
```

```
        while (tmp.next != current)  
            tmp = tmp.next;
```

```
        tmp.next = current.next;
```

```
    }
```


```
    if (current.next == null)  
        current = head;
```

```
    else
```

```
        current = current.next;
```

```
    }
```


```
}
```

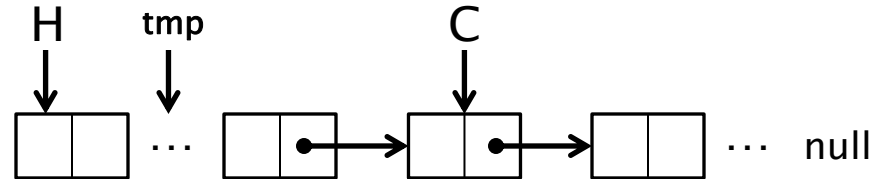

Example #3

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

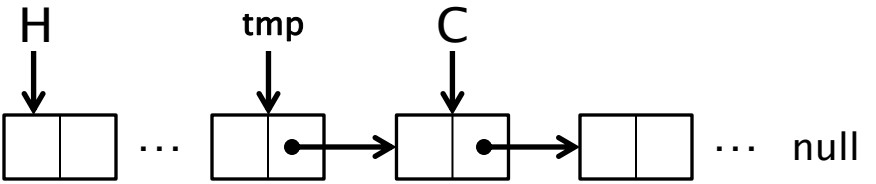


The diagram illustrates a linked list structure. It consists of several nodes, each represented as a box divided into two parts. The first node is pointed to by 'H' (head). The second node is pointed to by 'tmp'. The third node is pointed to by 'C' (current). The list ends with 'null'.

Example #3

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

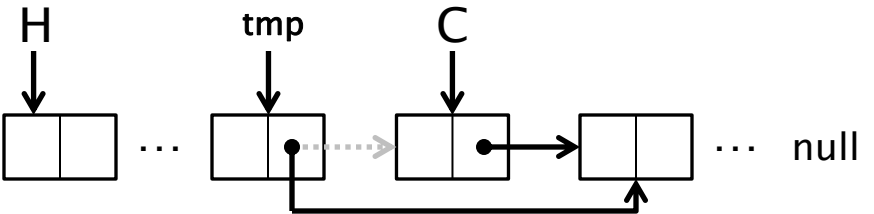

Example #3

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {
```

```
        Node<T> tmp = head;
```

```
        while (tmp.next != current)  
            tmp = tmp.next;
```

```
        tmp.next = current.next;
```


```
    }  
  
    if (current.next == null)  
        current = head;
```

```
    else
```

```
        current = current.next;
```

```
    }
```


```
}
```

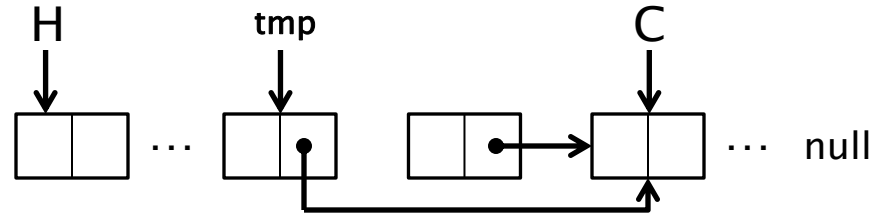

Example #3

ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

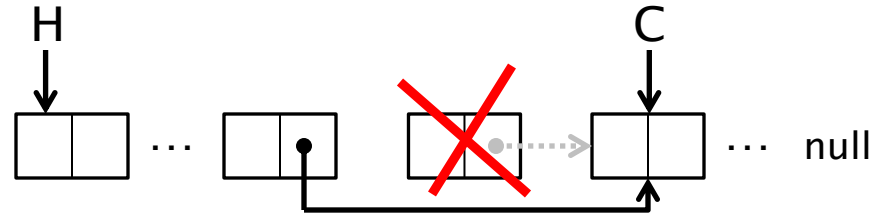

Example #3

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

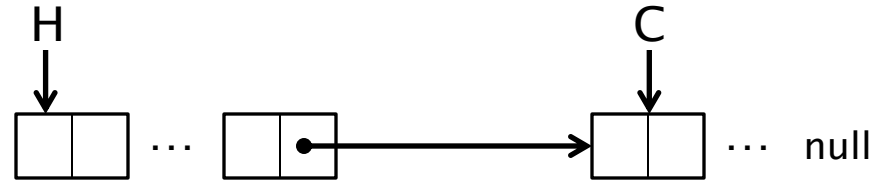


Example #3



ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

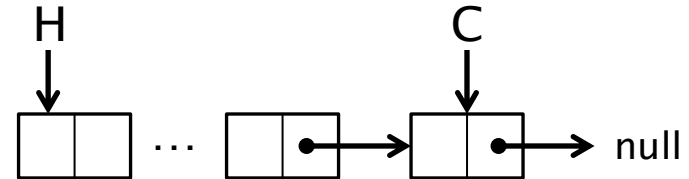

Example #4

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {
```

```
        Node<T> tmp = head;
```

```
        while (tmp.next != current)  
            tmp = tmp.next;
```


```
        tmp.next = current.next;
```

```
    }  
  
    if (current.next == null)  
        current = head;
```

```
    else  
        current = current.next;
```

```
}
```

```
}
```

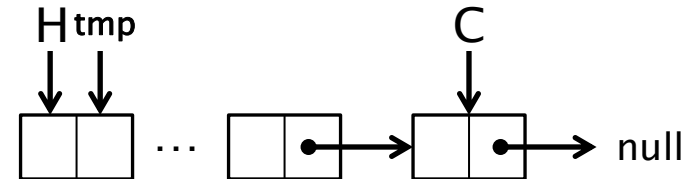

Example #4

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }
```

```
    else {
```

```
        Node<T> tmp = head;
```

```
        while (tmp.next != current)  
            tmp = tmp.next;
```

```
        tmp.next = current.next;
```

```
    }
```


```
    if (current.next == null)  
        current = head;
```

```
    else
```

```
        current = current.next;
```

```
    }
```

```
}
```

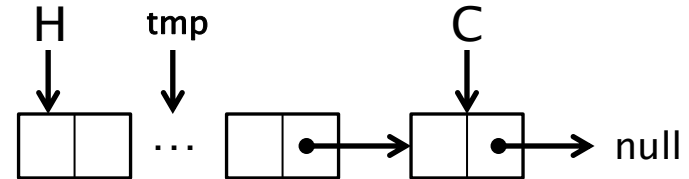

Example #4

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {
```

```
        Node<T> tmp = head;
```

```
        while (tmp.next != current)  
            tmp = tmp.next;
```


```
        tmp.next = current.next;
```

```
    }  
  
    if (current.next == null)  
        current = head;
```

```
    else  
        current = current.next;
```

```
}
```


```
}
```

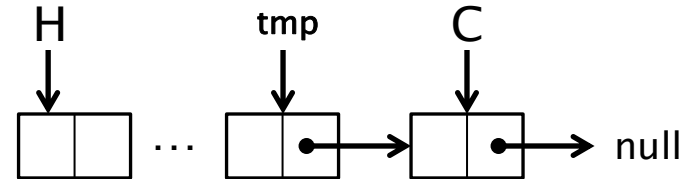

Example #4

ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

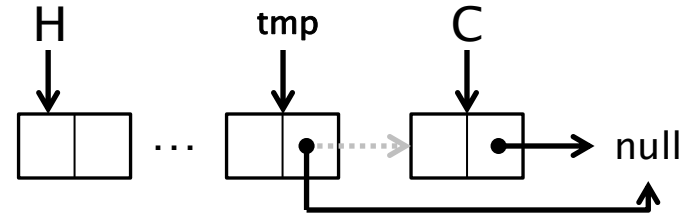

Example #4

ADT List (Linked List): Implementation


```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

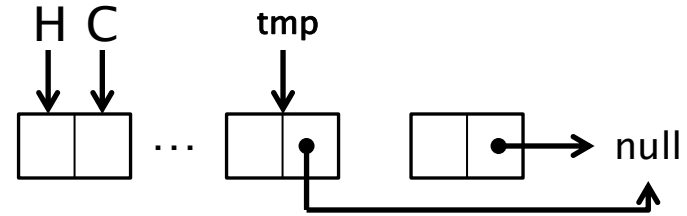

Example #4

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }  
    else {  
        Node<T> tmp = head;  
  
        while (tmp.next != current)  
            tmp = tmp.next;  
  
        tmp.next = current.next;  
    }  
  
    if (current.next == null)  
        current = head;  
    else  
        current = current.next;  
}
```

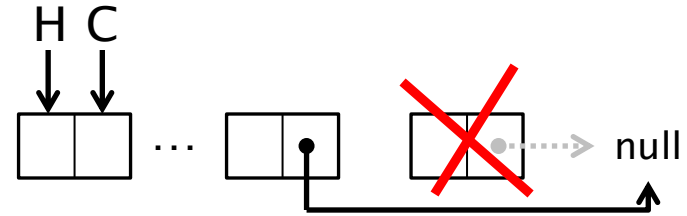

Example #4

ADT List (Linked List): Implementation

```
public void remove () {  
    if (current == head) {  
        head = head.next;  
    }
```

```
    else {
```

```
        Node<T> tmp = head;
```

```
        while (tmp.next != current)  
            tmp = tmp.next;
```

```
        tmp.next = current.next;
```

```
    }
```


```
    if (current.next == null)  
        current = head;
```

```
    else
```

```
        current = current.next;
```

```
    }
```

```
}
```

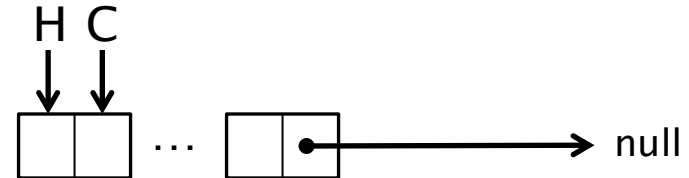

Example #4

ADT List (Array): Representation

```
public class ArrayList<T>
{
    private int maxsize;
    private int size;
    private int current;
    private T[] nodes;


    /** Creates a new instance of ArrayList */
    public ArrayList(int n) {
        maxsize = n;
        size = 0;
        current = -1;
        nodes = (T[]) new Object[n];
    }
}
```



ADT List (Array): Representation

```
public class ArrayList<T>
{
    private int maxsize;
    private int size;
    private int current;
    private T[] nodes;

    /** Creates a new instance of ArrayList */
    public ArrayList(int n) {
        maxsize = n;
        size = 0;
        current = -1;
        nodes = (T[]) new Object[n];
    }
}
```

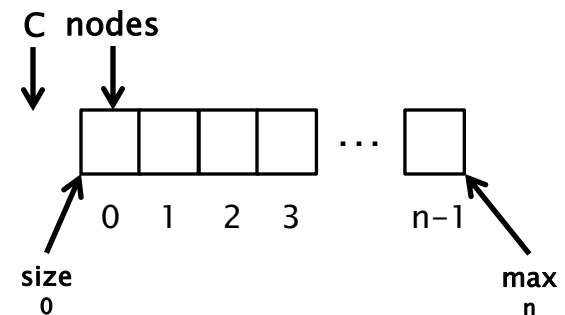


ADT List (Array): Implementation


```
public boolean full () {  
    return size == maxsize;  
}  
public boolean empty () {  
    return size == 0;  
}  
public boolean last () {  
    return current == size - 1;  
}  
public void findfirst () {  
    current = 0;  
}  
public void findnext () {  
    current++;  
}
```

ADT List (Array): Implementation

```
public boolean full () {  
    return size == maxsize;  
}  
  
public boolean empty () {  
    return size == 0;  
}  
  
public boolean last () {  
    return current == size - 1;  
}  
  
public void findfirst () {  
    current = 0;  
}  
  
public void findnext () {  
    current++;  
}
```

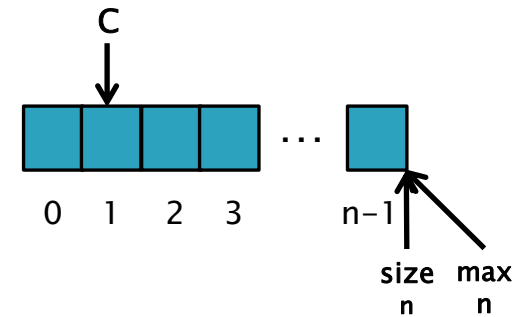


true

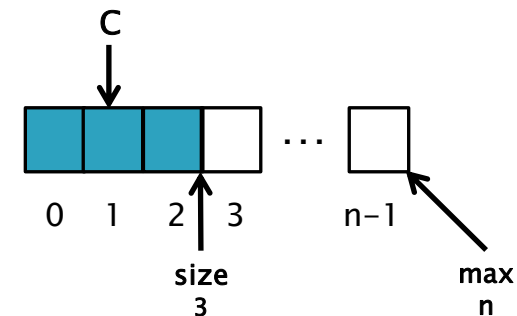


false

ADT List (Array): Implementation

```
public boolean full () {  
    return size == maxsize;  
}  
  
public boolean empty () {  
    return size == 0;  
}  
  
public boolean last () {  
    return current == size - 1;  
}  
  
public void findfirst () {  
    current = 0;  
}  
  
public void findnext () {  
    current++;  
}
```

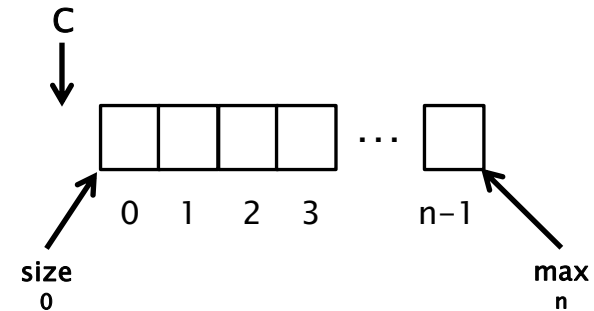


true

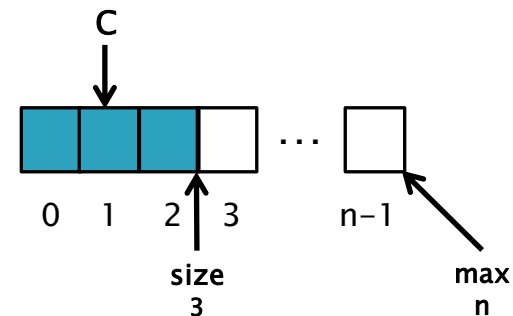


false

ADT List (Array): Implementation

```
public boolean full () {  
    return size == maxsize;  
}  
public boolean empty () {  
    return size == 0;  
}  
public boolean last () {  
    return current == size - 1;  
}  
public void findfirst () {  
    current = 0;  
}  
public void findnext () {  
    current++;  
}
```

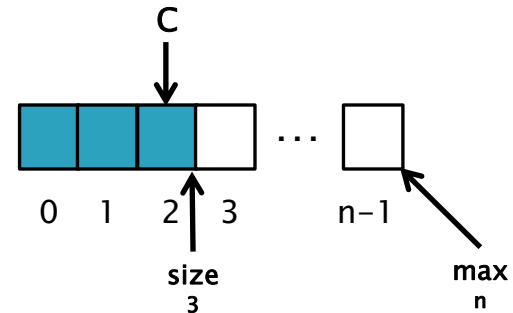


true

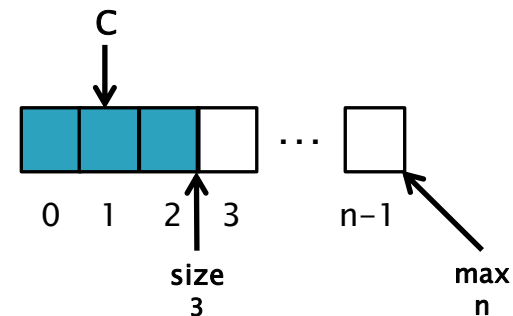

false


ADT List (Array): Implementation

```
public boolean full () {  
    return size == maxsize;  
}  
public boolean empty () {  
    return size == 0;  
}  
public boolean last () {  
    return current == size - 1;  
}  
public void findfirst () {  
    current = 0;  
}  
public void findnext () {  
    current++;  
}
```

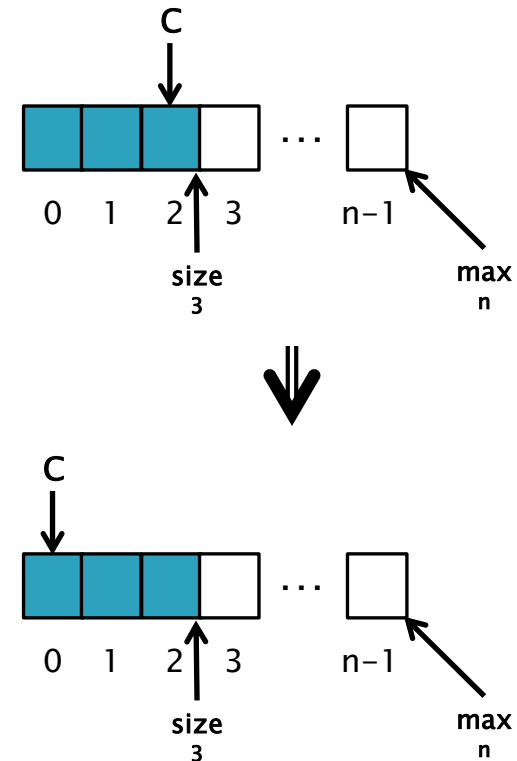

ADT List (Array): Implementation

```
public boolean full () {  
    return size == maxsize;  
}  
  
public boolean empty () {  
    return size == 0;  
}  
  
public boolean last () {  
    return current == size - 1;  
}  
  
public void findfirst () {  
    current = 0;  
}  
  
public void findnext () {  
    current++;  
}
```

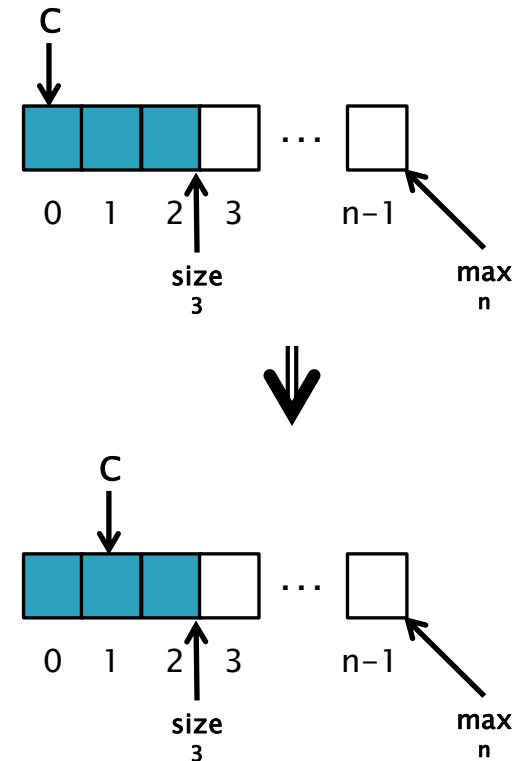

ADT List (Array): Implementation


```
public T retrieve () {  
    return nodes[current];  
}  
  
public void update (T val) {  
    nodes[current] = val;  
}  
  
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

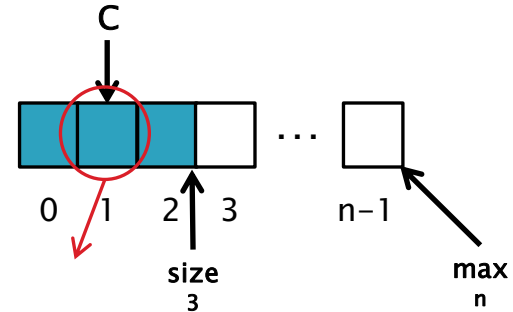


ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

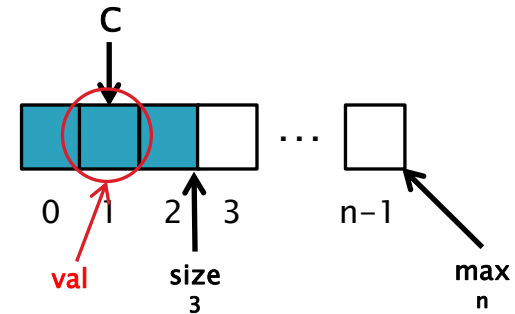


ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

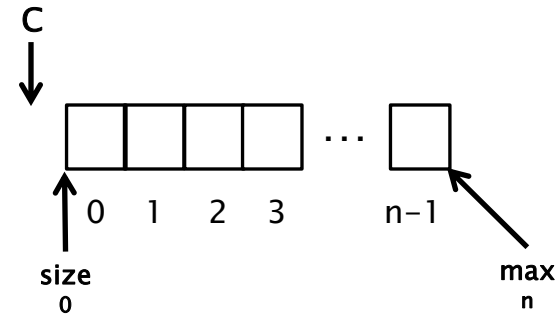


Example #1

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

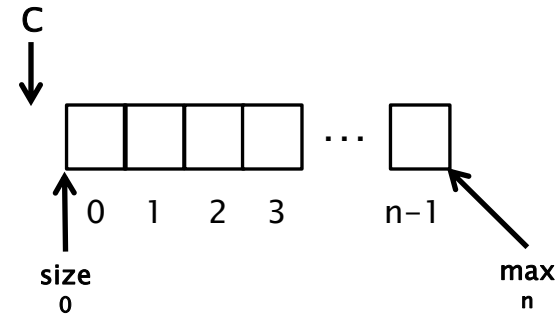


Example #1

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

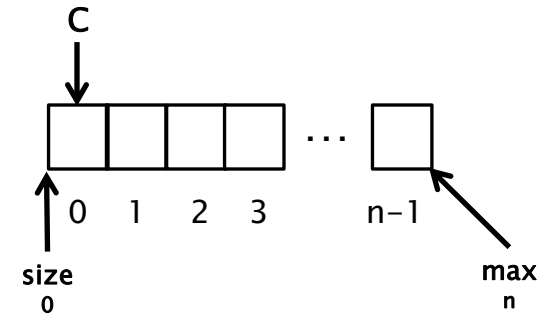


Example #1

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

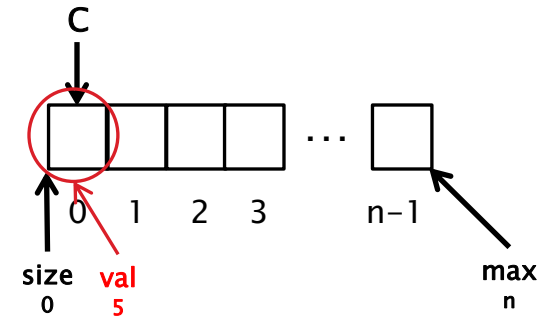


Example #1

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

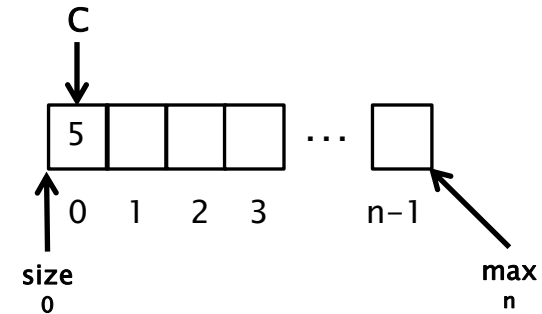


Example #1

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

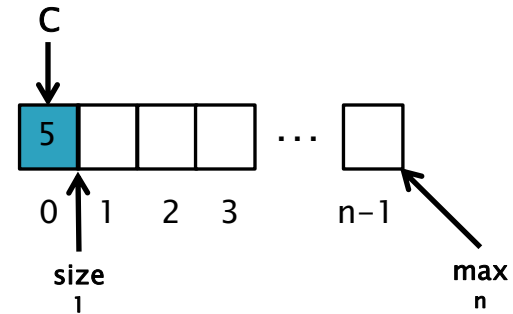


Example #1

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

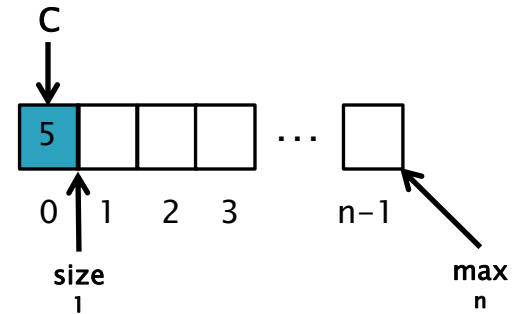


Example #2

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

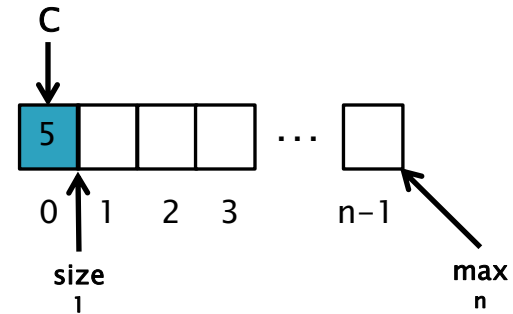


Example #2

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

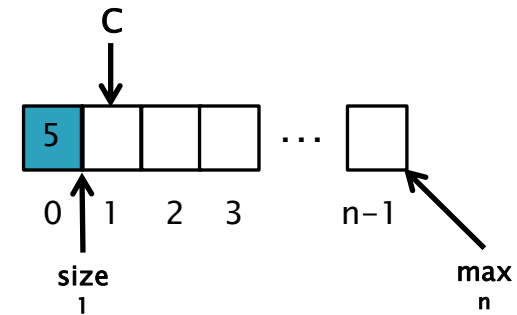


Example #2

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

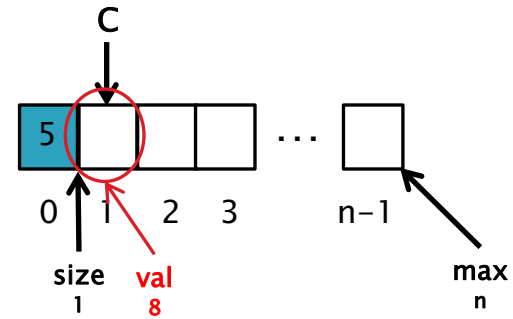


Example #2

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

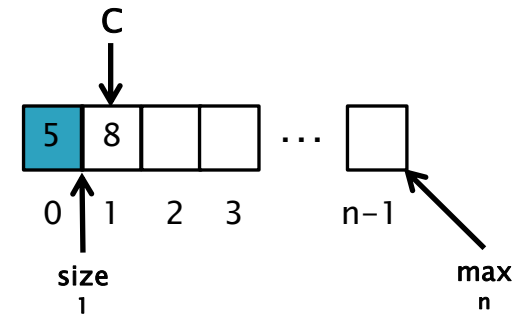


Example #2

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

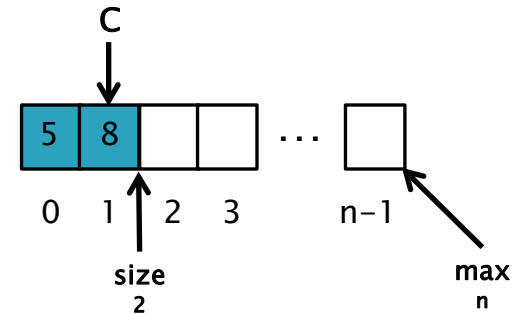


Example #2

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

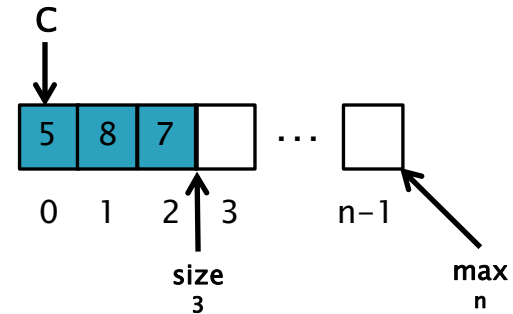


Example #3

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

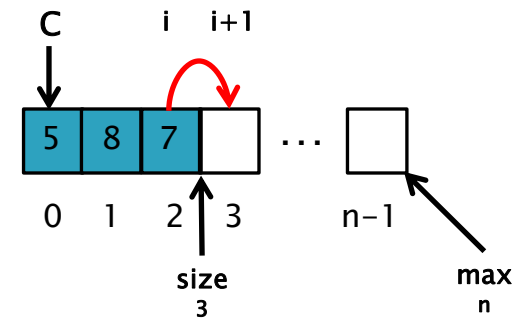


Example #3

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

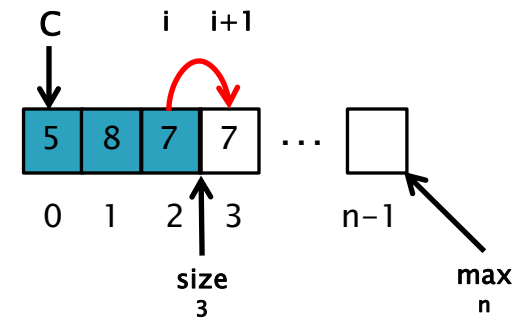


Example #3

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

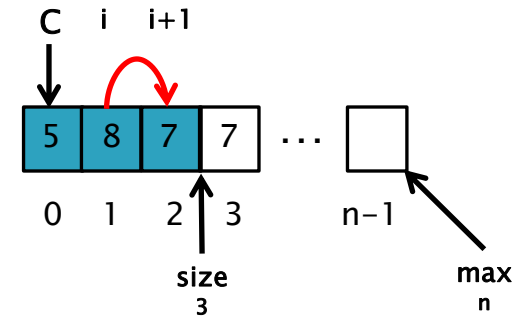


Example #3

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

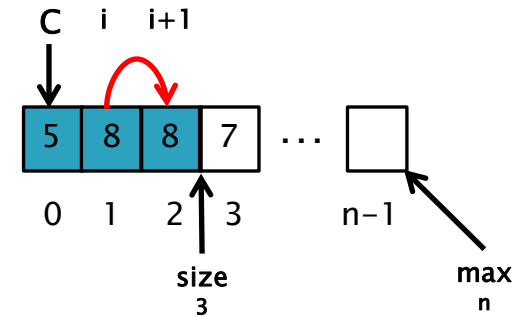


Example #3

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

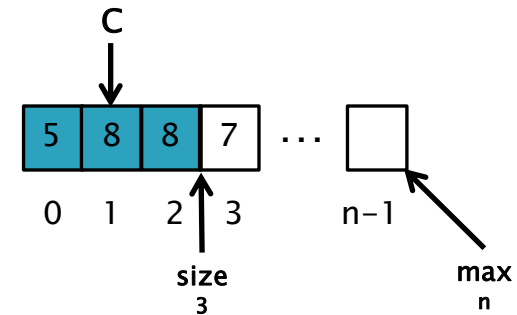


Example #3

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

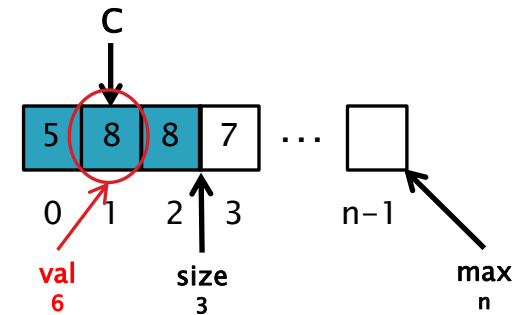


Example #3

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

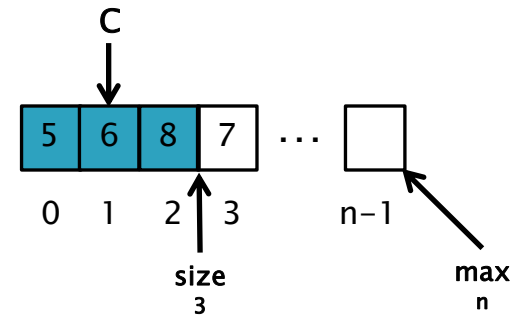


Example #3

ADT List (Array): Implementation

```
public T retrieve () {  
    return nodes[current];  
}
```

```
public void update (T val) {  
    nodes[current] = val;  
}
```

```
public void insert (T val) {  
    for (int i = size-1; i > current; --i) {  
        nodes[i+1] = nodes[i];  
    }  
    current++;  
    nodes[current] = val;  
    size++;  
}
```

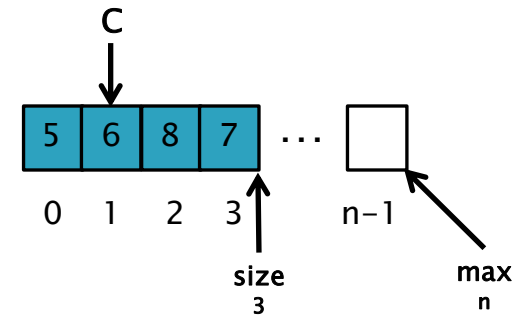


Example #3

ADT List (Array): Implementation

```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}  
}
```

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

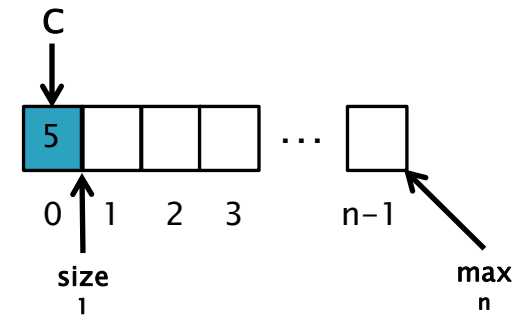

Example #1

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

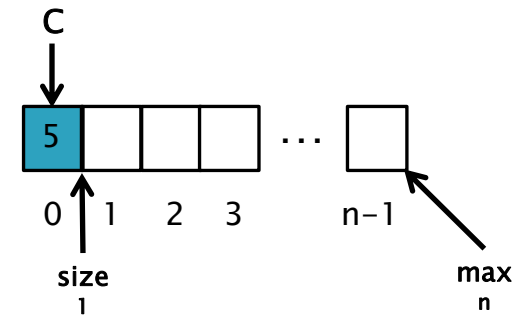

Example #1

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

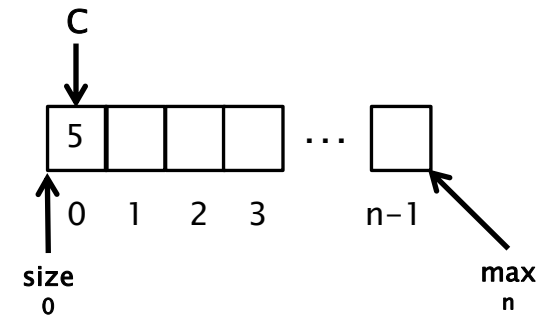

Example #1

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

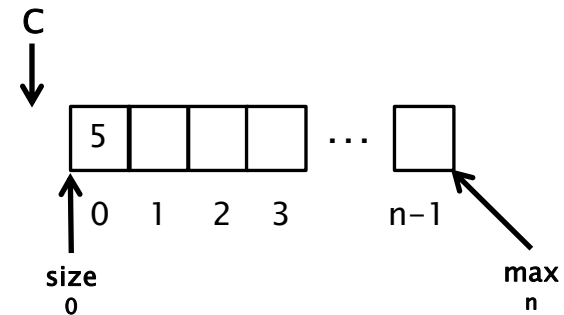

Example #1

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

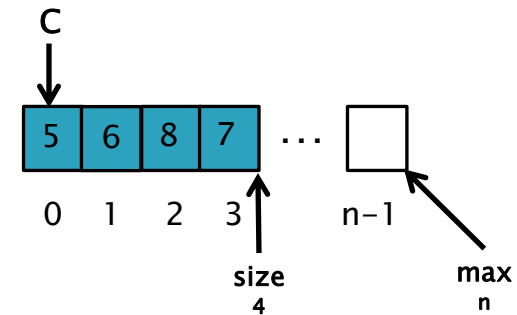

Example #2

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

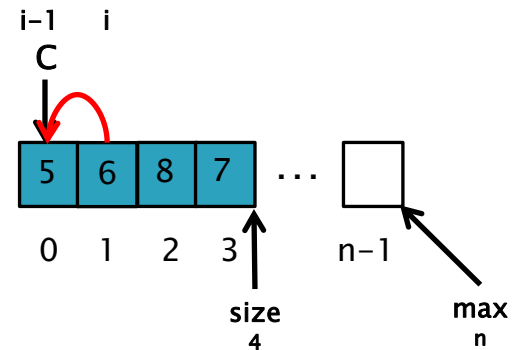

Example #2

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

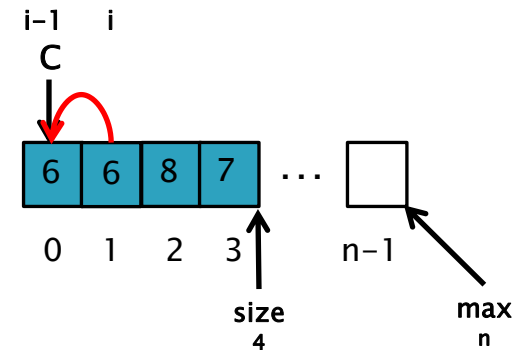

Example #2

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

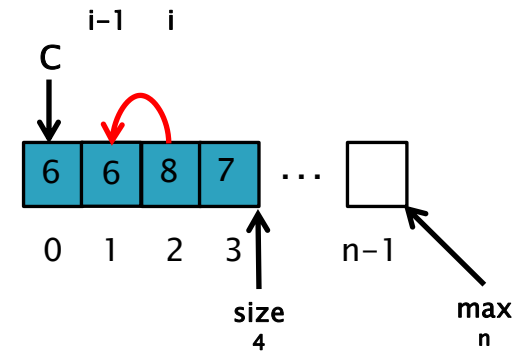

Example #2

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

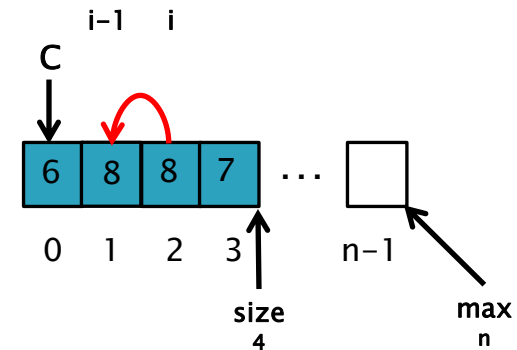

Example #2

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

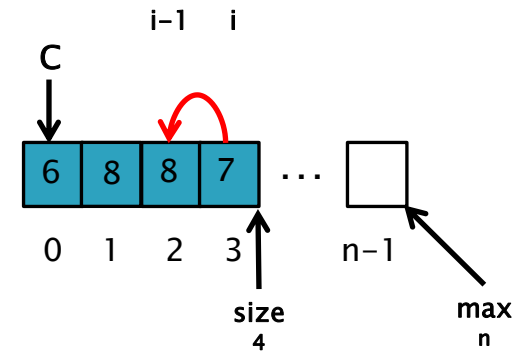

Example #2

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

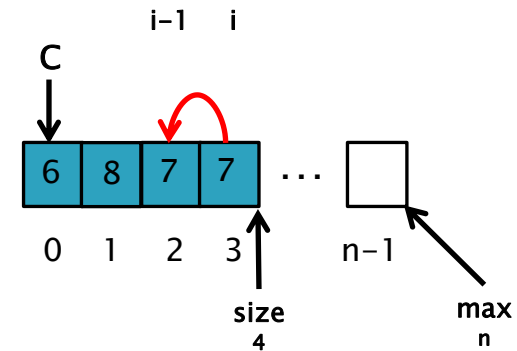

Example #2

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

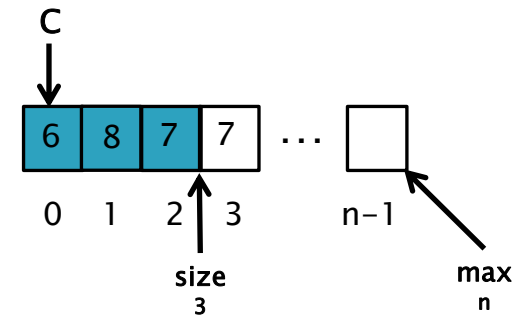

Example #2

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

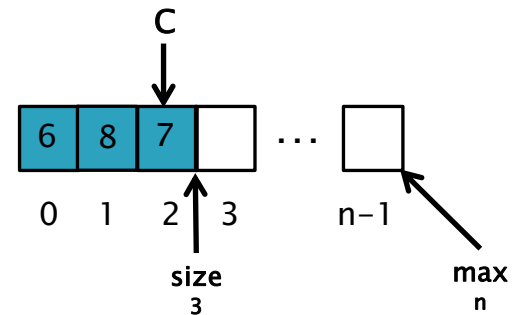

Example #3

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

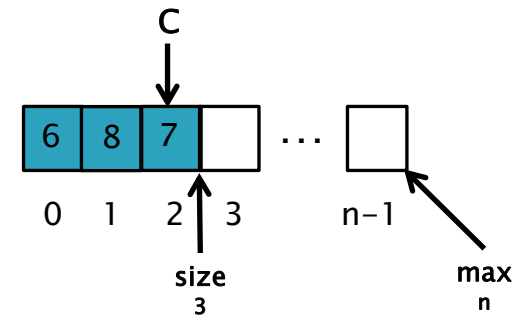

Example #3

ADT List (Array): Implementation


```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

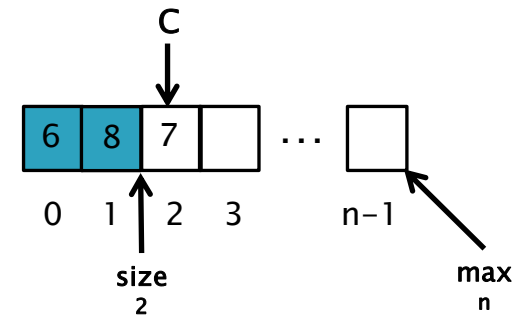

Example #3

ADT List (Array): Implementation

```
public void remove () {  
    for (int i = current + 1; i < size; i++) {  
        nodes[i-1] = nodes[i];  
    }  
    size--;  
    if (size == 0)  
        current = -1;  
    else if (current == size)  
        current = 0;  
}
```

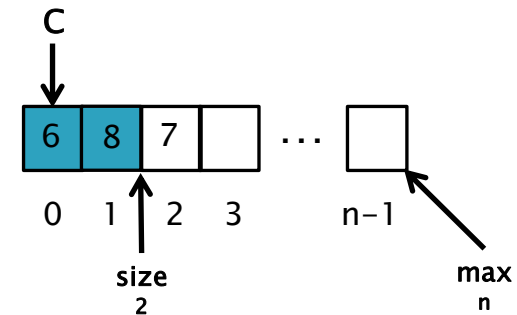

Example #3

ADT List

- ▶ How to use the ADT List?
- ▶ The implementation of ADT is available to you as a Java class ready for use.

Example: You are required to implement a static method to get the length of a list.

Using ADT List

```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";  
  
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();  
  
        System.out.println(al.retrieve());  
        System.out.println(al.full());  
  
        System.out.println(length(al));  
        System.out.println("Hello, World");  
    }  
}
```

Using ADT List


```
public static int length(ArrayList<T> l) {  
    int count = 0;  
  
    if (l.empty() == false) {  
        l.findfirst();  
        while (l.last() == false) {  
            count++;  
            l.findnext();  
        }  
        count++;  
    }  
  
    return count;  
}
```

A static method to find the length of a list.

Note: it has been implemented using the methods of ADT List

Using ADT List


```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";  
  
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();  
  
        System.out.println(al.retrieve());  
        System.out.println(al.full());  
  
        System.out.println(length(al));  
        System.out.println("Hello, World");  
    }  
}
```

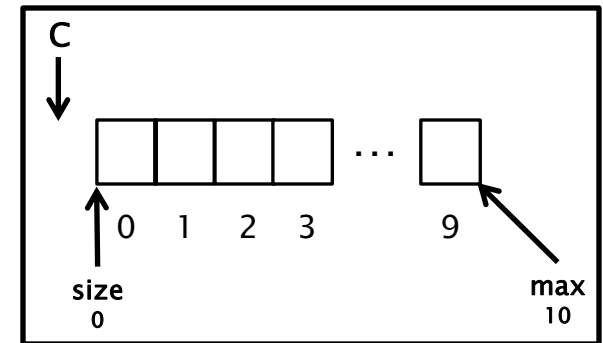

Output:

Using ADT List

```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";  
  
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();  
  
        System.out.println(al.retrieve());  
        System.out.println(al.full());  
  
        System.out.println(length(al));  
        System.out.println("Hello, World");  
    }  
}
```

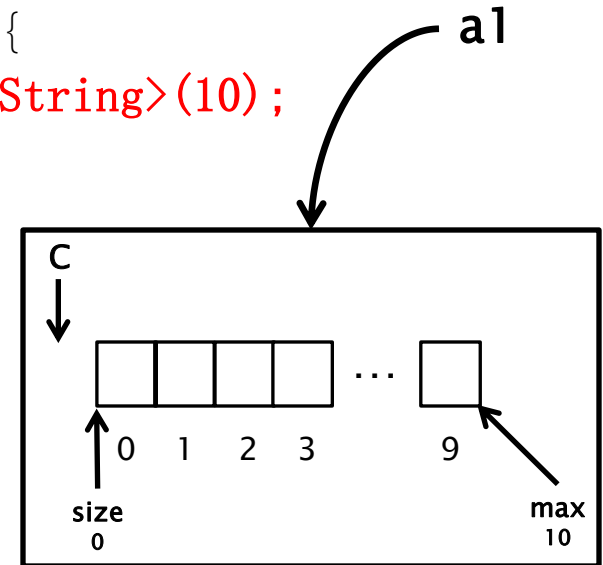

Output:

Using ADT List


```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";
```

```
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();
```

```
        System.out.println(al.retrieve());  
        System.out.println(al.full());
```

```
        System.out.println(length(al));  
        System.out.println("Hello, World");
```


```
    }
```

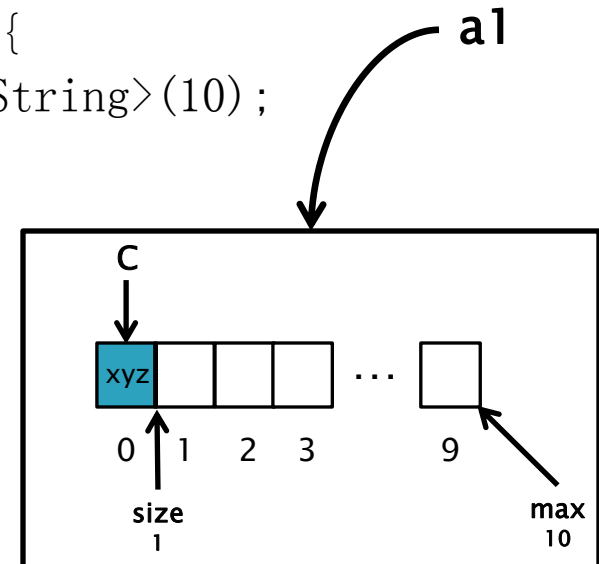

Output:

Using ADT List


```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";  
  
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();  
  
        System.out.println(al.retrieve());  
        System.out.println(al.full());  
  
        System.out.println(length(al));  
        System.out.println("Hello, World");  
    }  
}
```

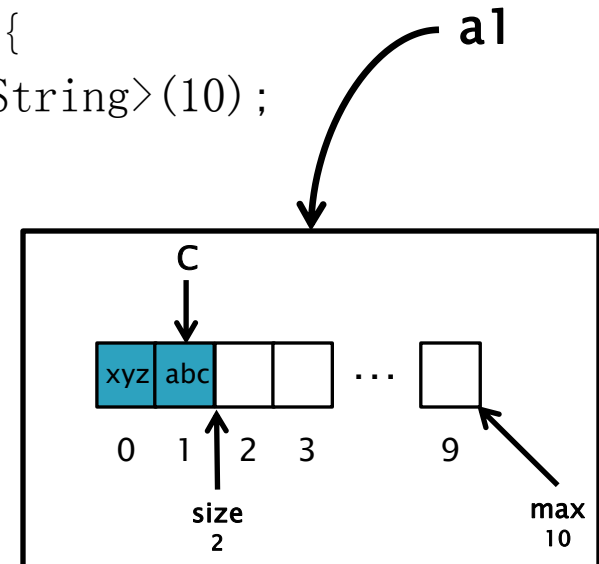

Output:

Using ADT List


```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";  
  
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();  
  
        System.out.println(al.retrieve());  
        System.out.println(al.full());  
  
        System.out.println(length(al));  
        System.out.println("Hello, World");  
    }  
}
```

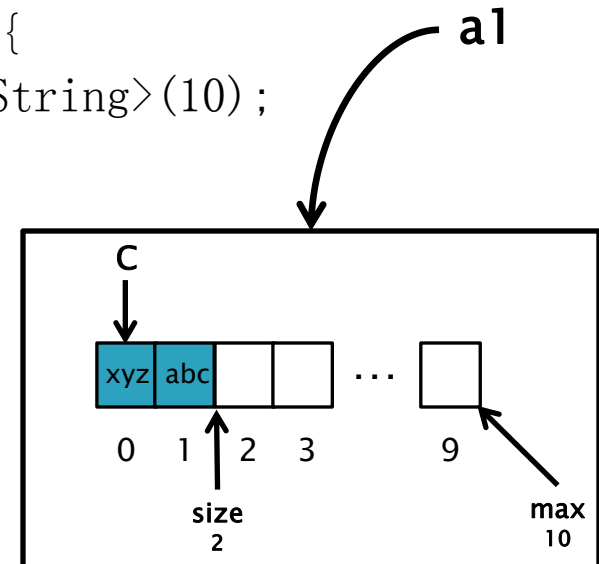

Output:

Using ADT List

```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";  
  
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();  
  
        System.out.println(al.retrieve());  
        System.out.println(al.full());  
  
        System.out.println(length(al));  
        System.out.println("Hello, World");  
    }  
}
```

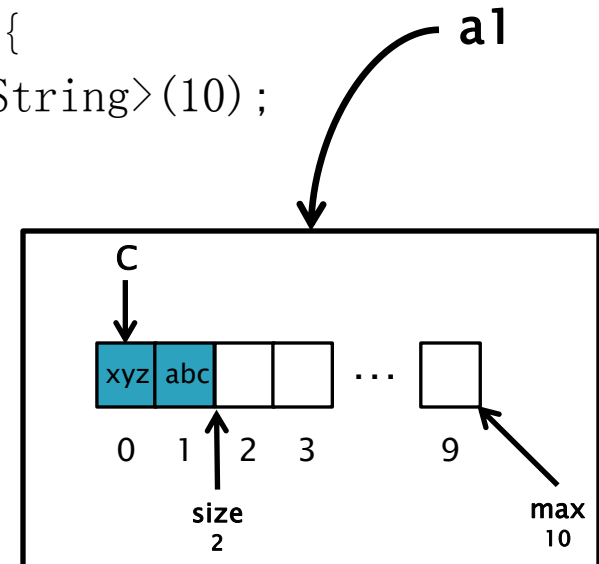


Output:

xyz
false

Using ADT List

```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";  
  
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();  
  
        System.out.println(al.retrieve());  
        System.out.println(al.full());  
  
        System.out.println(length(al));  
        System.out.println("Hello, World");  
    }  
}
```

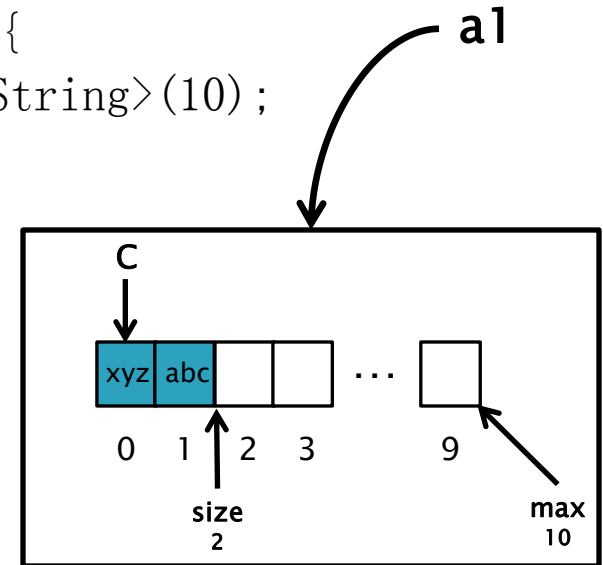


Output:

xyz
false

Using ADT List

```
public static int length(ArrayList<T> l) {  
    int count = 0;  
  
    if (l.empty() == false) {  
        l.findfirst();  
        while (l.last() == false) {  
            count++;  
            l.findnext();  
        }  
        count++;  
    }  
  
    return count;  
}
```

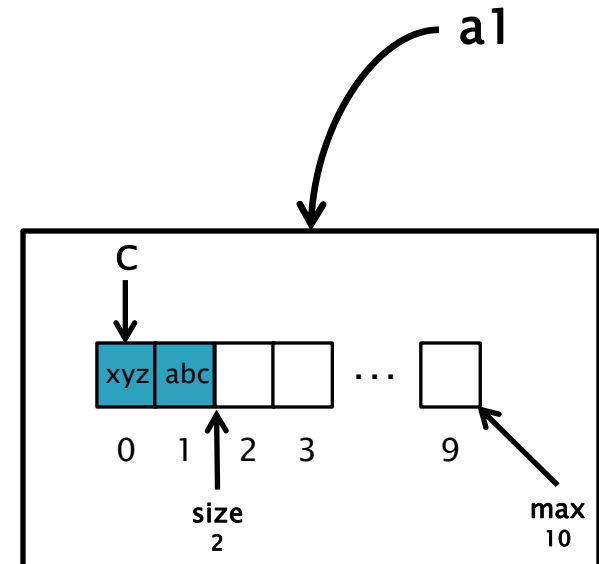


Output:

xyz
false

Using ADT List

```
public static int length(ArrayList<T> l) {  
    int count = 0;  
  
    if (l.empty() == false) {  
        l.findfirst();  
        while (l.last() == false) {  
            count++;  
            l.findnext();  
        }  
        count++;  
    }  
  
    return count;  
}
```

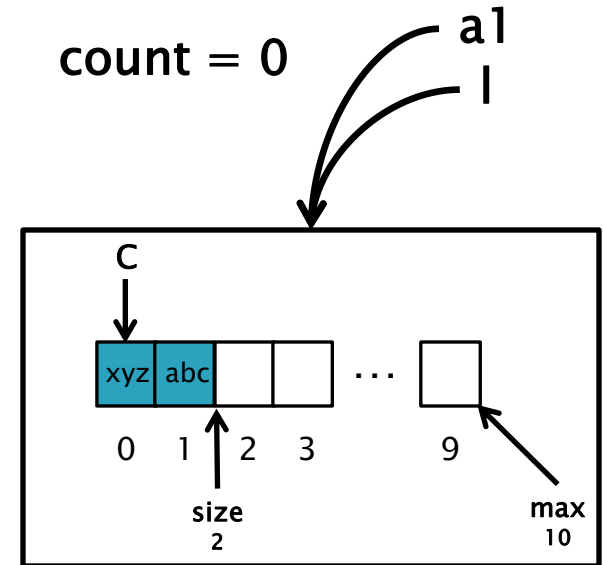


Output:

xyz
false

Using ADT List

```
public static int length(ArrayList<T> l) {  
    int count = 0;  
  
    if (l.empty() == false) {  
        l.findfirst();  
        while (l.last() == false) {  
            count++;  
            l.findnext();  
        }  
        count++;  
    }  
  
    return count;  
}
```

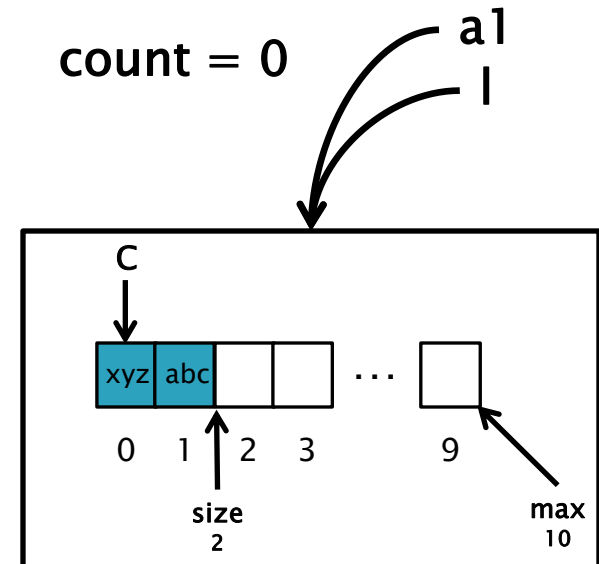


Output:

xyz
false

Using ADT List

```
public static int length(ArrayList<T> l) {  
    int count = 0;  
  
    if (l.empty() == false) {  
        l.findfirst();  
        while (l.last() == false) {  
            count++;  
            l.findnext();  
        }  
        count++;  
    }  
  
    return count;  
}
```

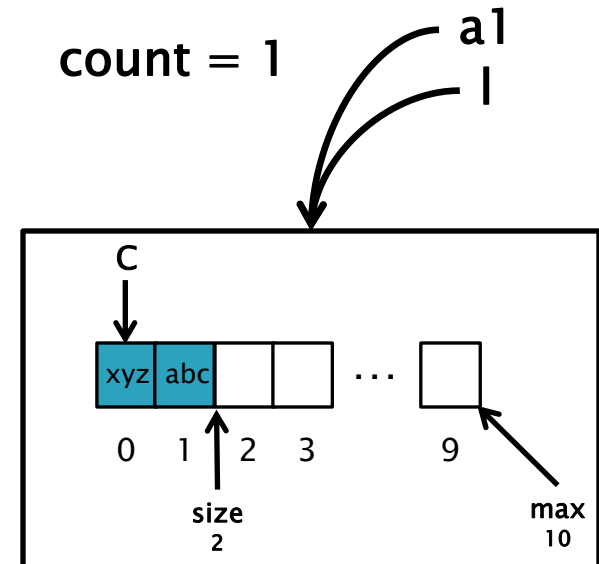


Output:

xyz
false

Using ADT List

```
public static int length(ArrayList<T> l) {  
    int count = 0;  
  
    if (l.empty() == false) {  
        l.findfirst();  
        while (l.last() == false) {  
            count++;  
            l.findnext();  
        }  
        count++;  
    }  
  
    return count;  
}
```

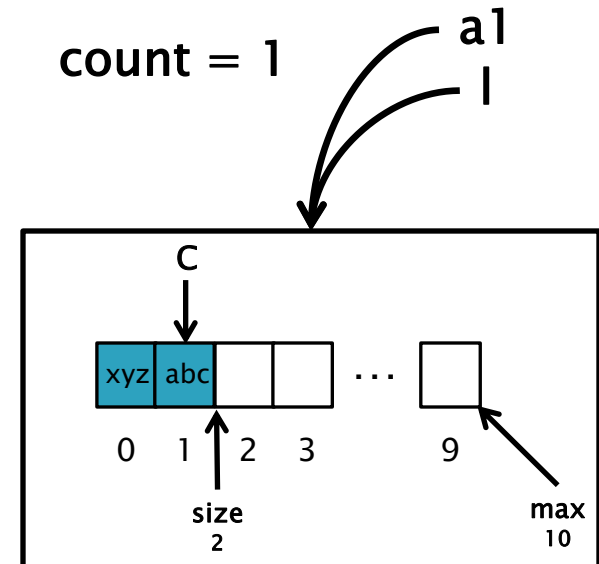


Output:

xyz
false

Using ADT List

```
public static int length(ArrayList<T> l) {  
    int count = 0;  
  
    if (l.empty() == false) {  
        l.findfirst();  
        while (l.last() == false) {  
            count++;  
            l.findnext();  
        }  
        count++;  
    }  
  
    return count;  
}
```

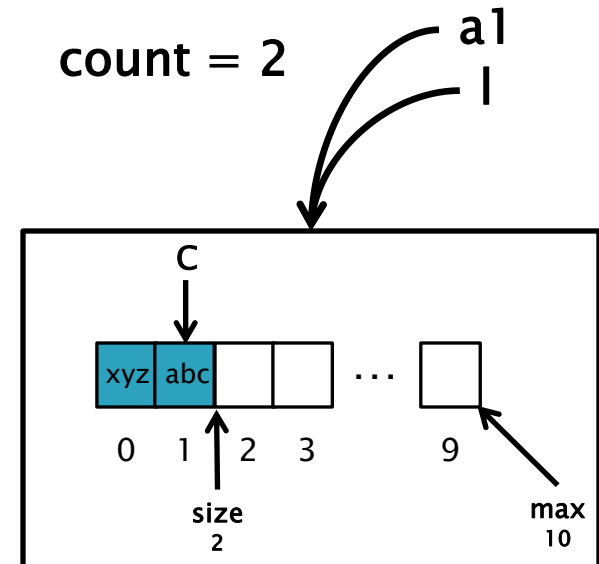


Output:

xyz
false

Using ADT List

```
public static int length(ArrayList<T> l) {  
    int count = 0;  
  
    if (l.empty() == false) {  
        l.findfirst();  
        while (l.last() == false) {  
            count++;  
            l.findnext();  
        }  
        count++;  
    }  
  
    return count;  
}
```

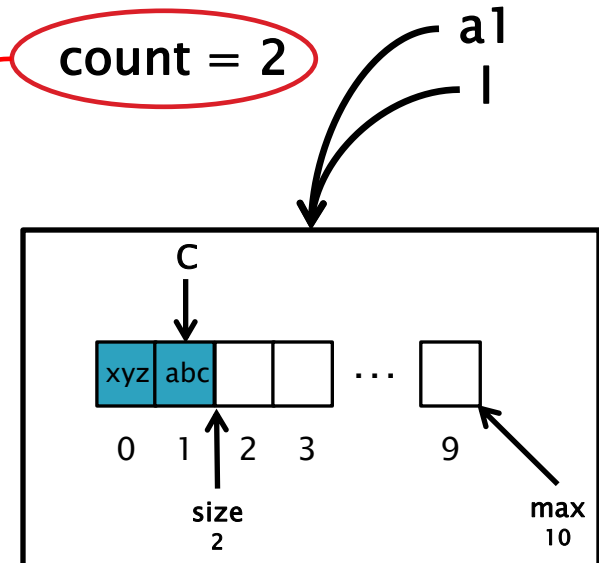


Output:

xyz
false

Using ADT List

```
public class TestArrayList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        String s1= "xyz", s2 = "abc";  
  
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();  
  
        System.out.println(al.retrieve());  
        System.out.println(al.full());  
  
        System.out.println(length(al));  
        System.out.println("Hello, World");  
    }  
}
```

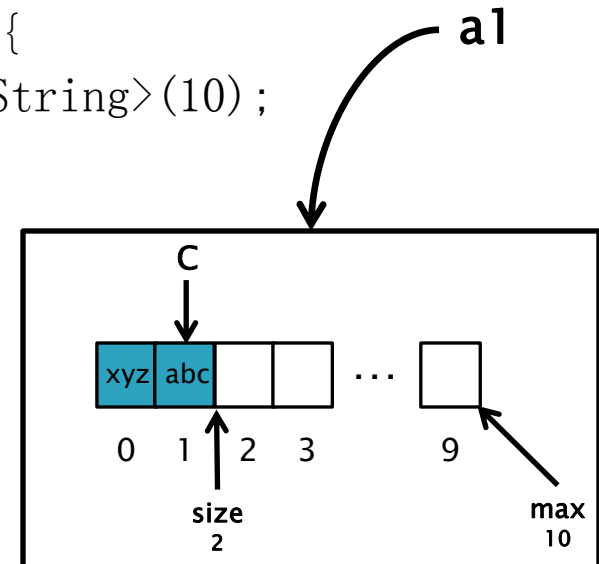

Output:

xyz
false
2
Hello, World

ADT List

What are the changes that need to be made to use List (Linked List implementation) instead of List (Array List implementation)?

Using ADT List

```
public class TestLinkedList {  
    public static void main ( String[] args ) {  
        ArrayList<String> al = new ArrayList<String>(10);  
        LinkedList<String> al = new LinkedList<String>();  
        String s1= "xyz", s2 = "abc";
```

```
        al.insert(s1);  
        al.insert(s2);  
        al.findfirst();
```

```
        System.out.println(al.retrieve());  
        System.out.println(al.full());
```

```
        System.out.println(length(al));  
        System.out.println("Hello, World");
```

```
    }
```

Only this line!

ADT List

You are required to implement a static method to search for an element e in a list L , and if e is present make current pointer point to e .
Use operations of ADT List.


Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
  
    return false;  
}  
...
```

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #1

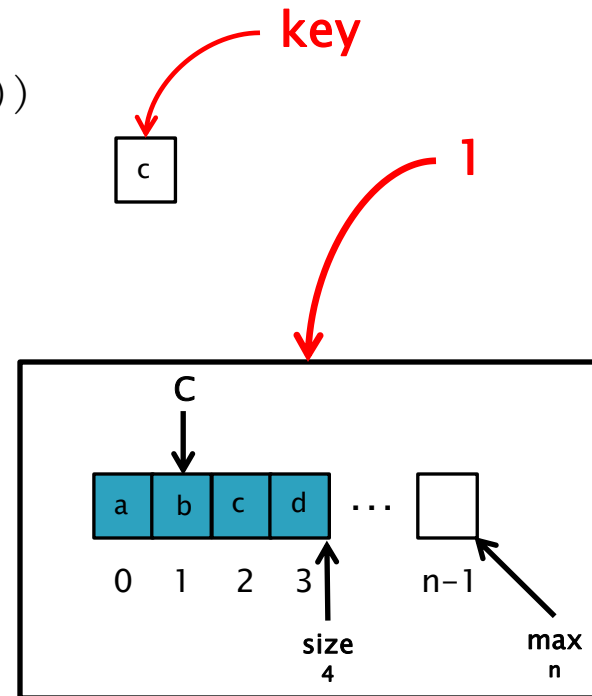

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #1

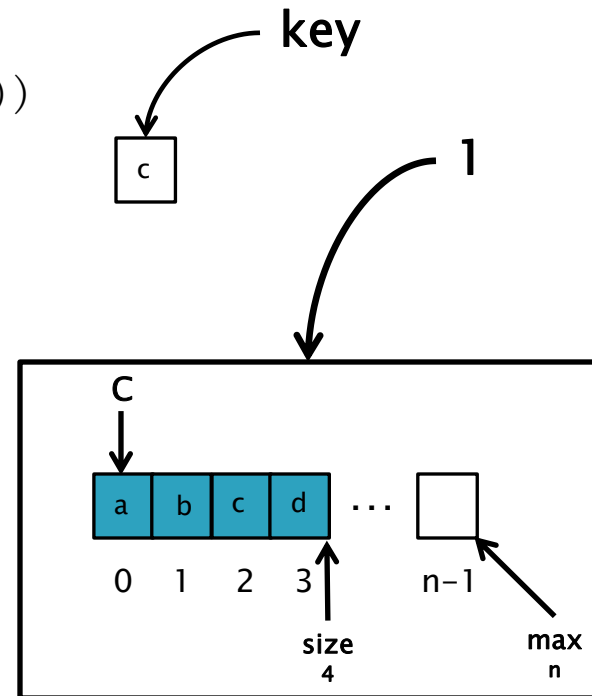

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #1

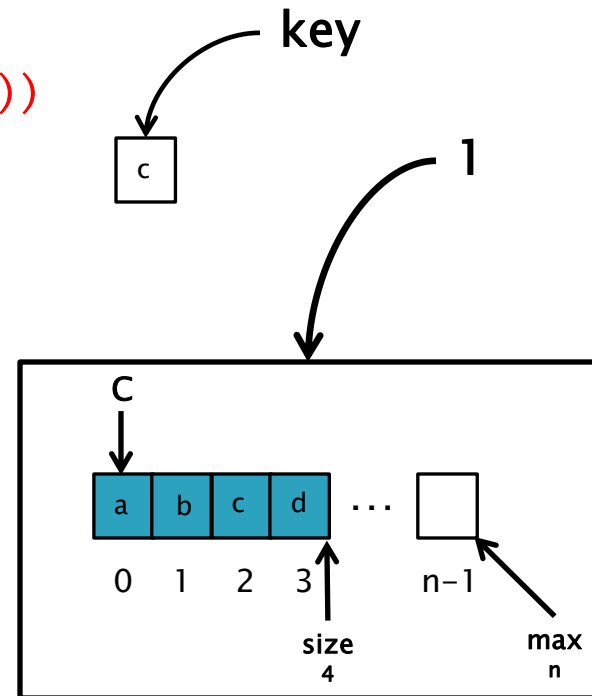

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #1

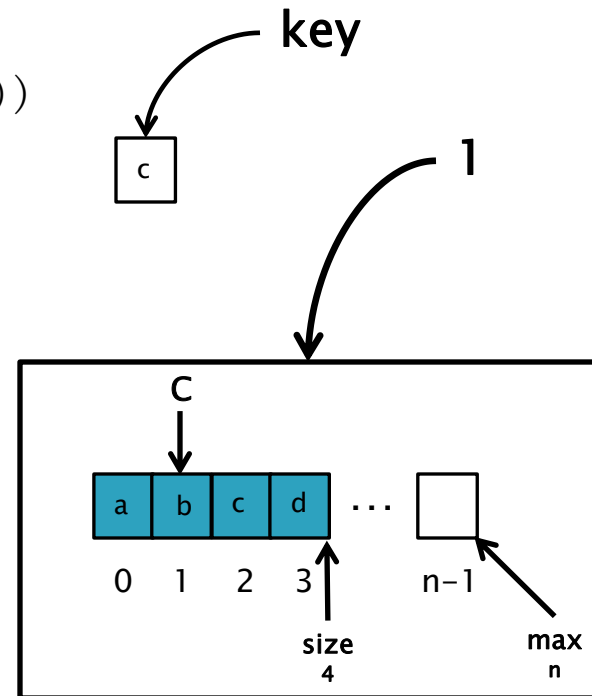

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #1

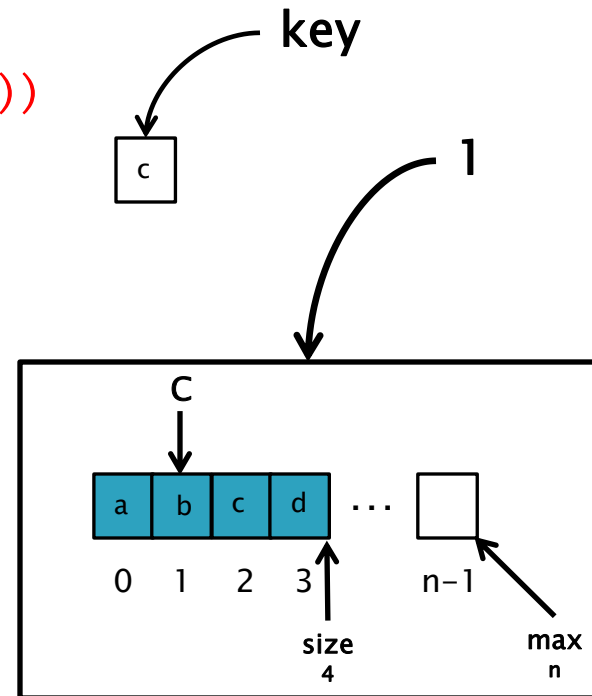

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```

Example #1

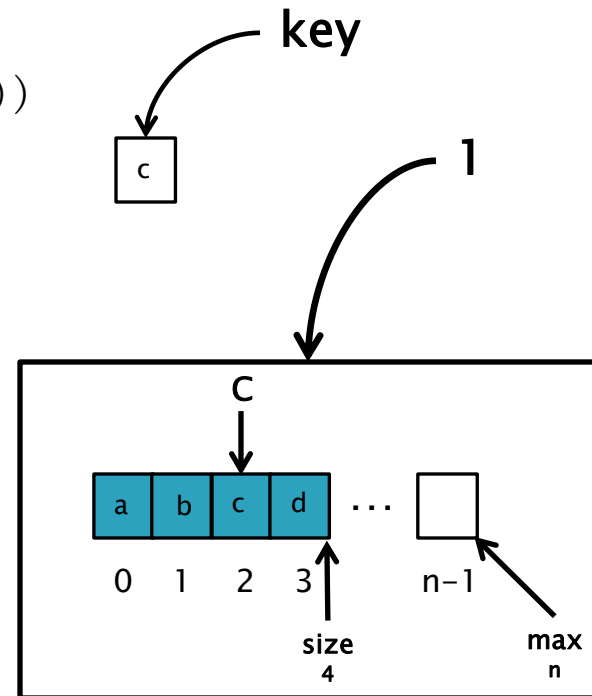


Search Item (Static Method)

```
...
public static boolean find(ArrayList<T> l, T key) {
    if(l.empty() == false) {
        l.findfirst();
        while(l.last() == false) {
            if(l.retrieve().equals(key))
                return true;
            l.findnext();
        }
        if(l.retrieve().equals(key))
            return true;
    }

    return false;
}
...
```


Example #1

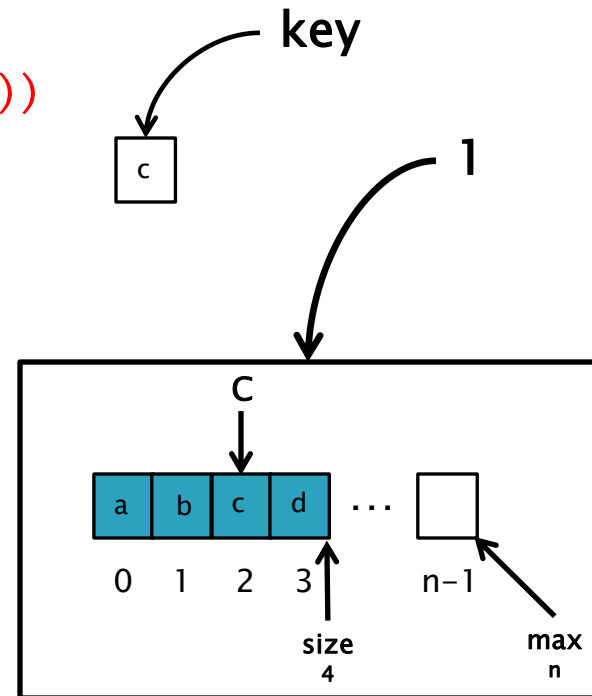

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #1

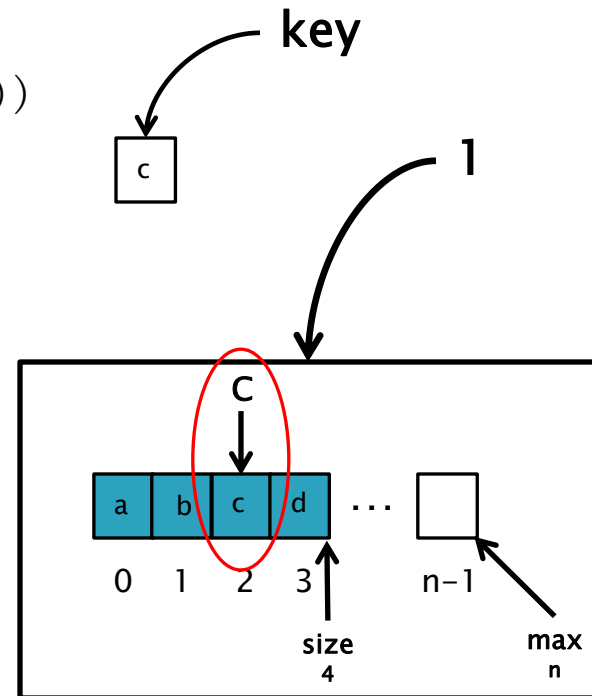

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #2

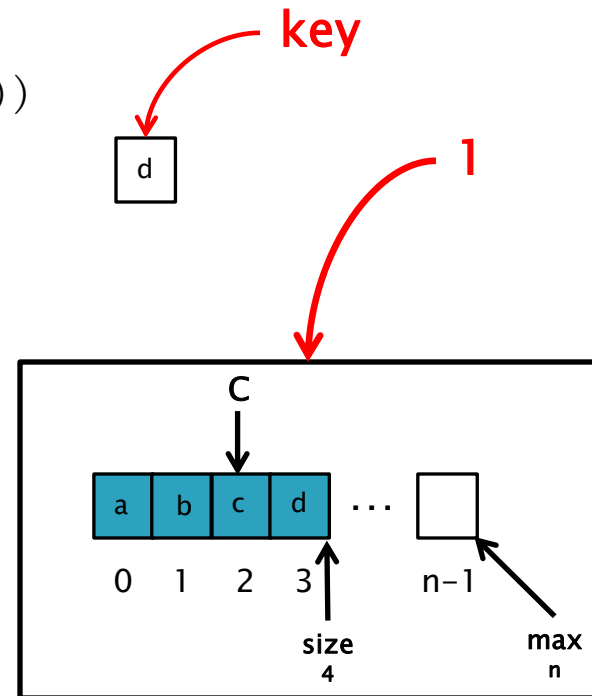

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #2

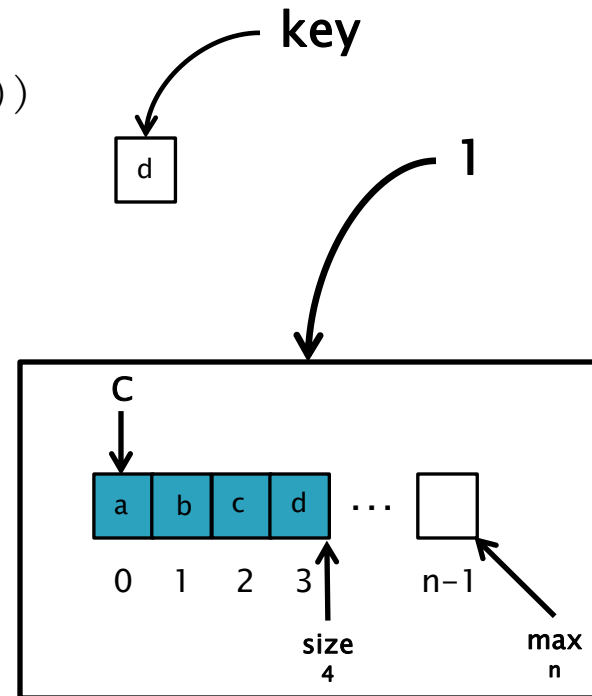

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
  
    return false;  
}  
...
```


Example #2

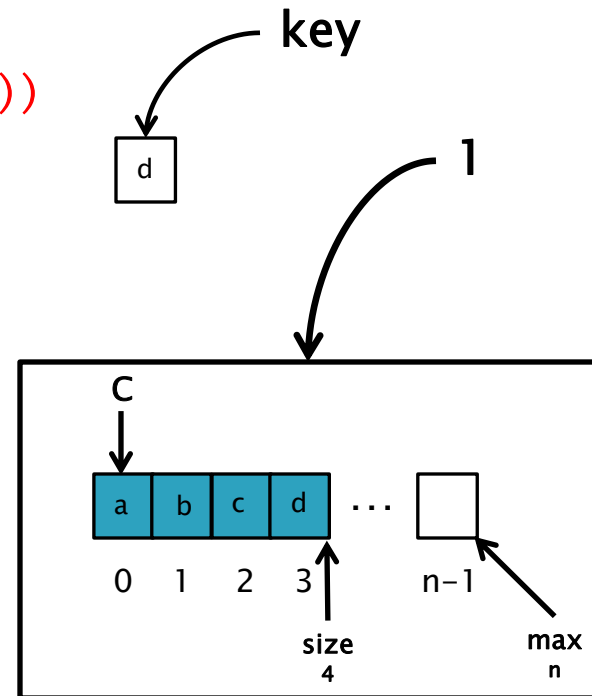

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #2

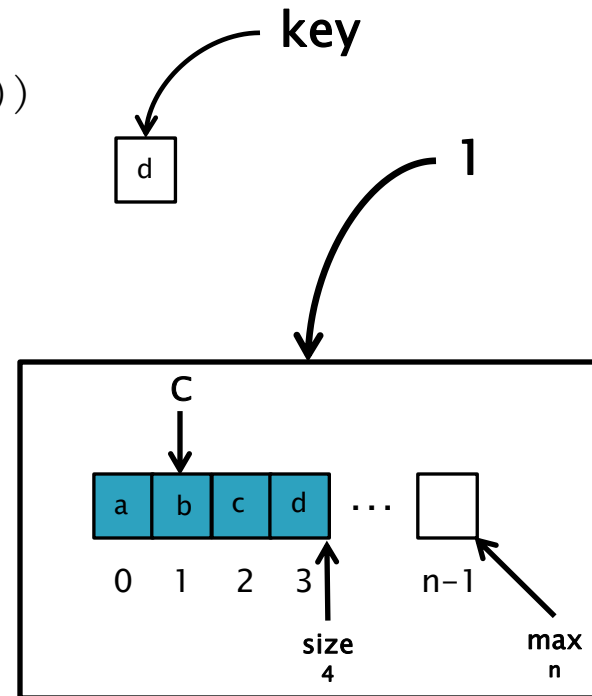

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #2

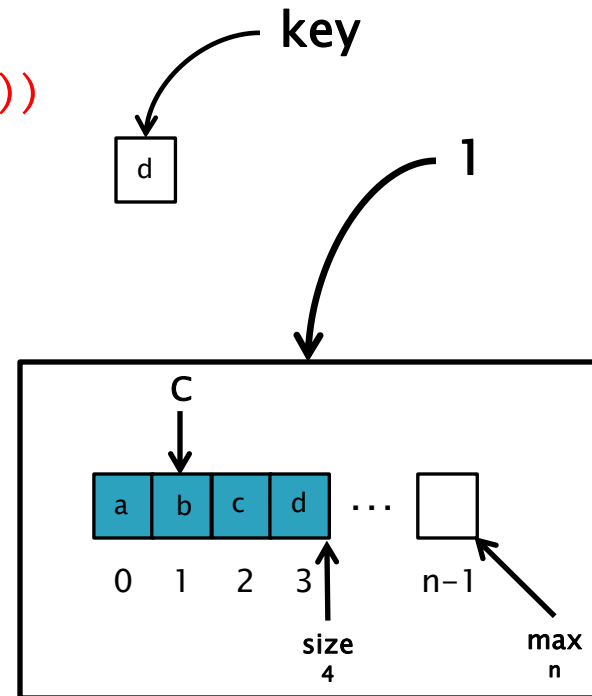

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```

Example #2

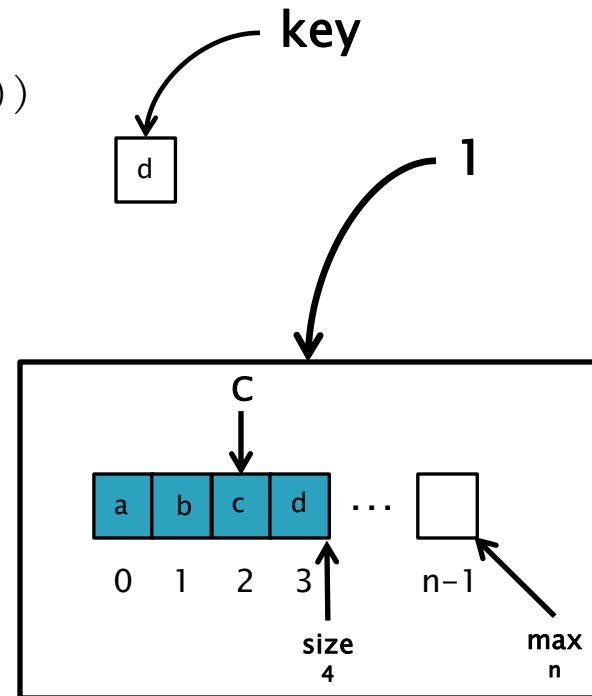


Search Item (Static Method)

```
...
public static boolean find(ArrayList<T> l, T key) {
    if(l.empty() == false) {
        l.findfirst();
        while(l.last() == false) {
            if(l.retrieve().equals(key))
                return true;
            l.findnext();
        }
        if(l.retrieve().equals(key))
            return true;
    }

    return false;
}
...
```


Example #2

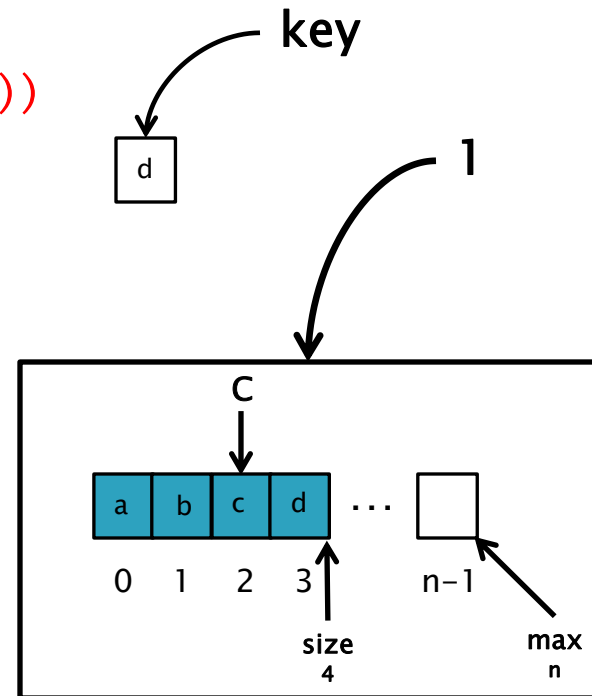

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #2

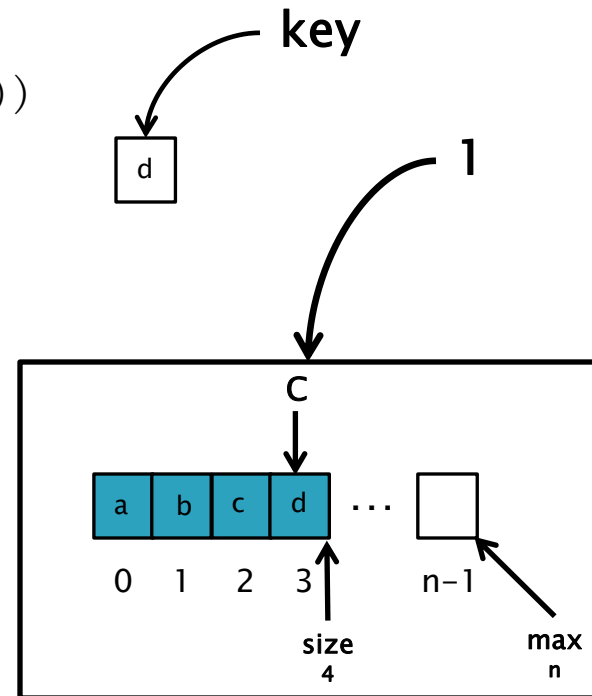

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #2

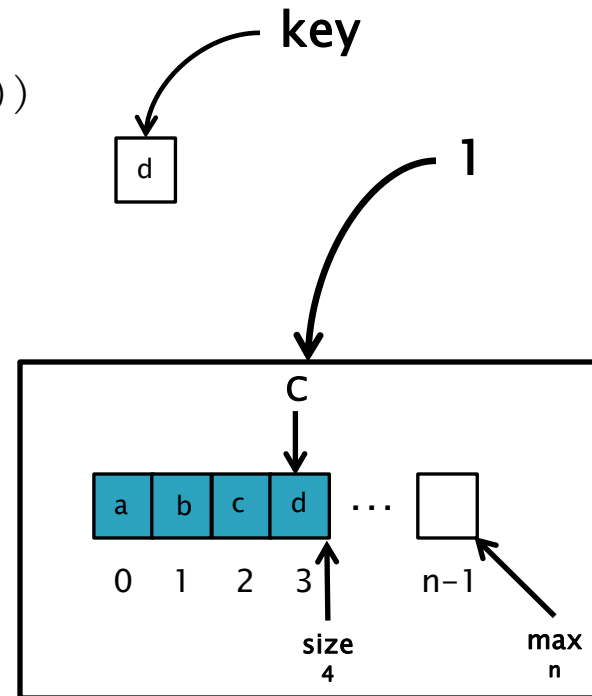

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```

Example #2

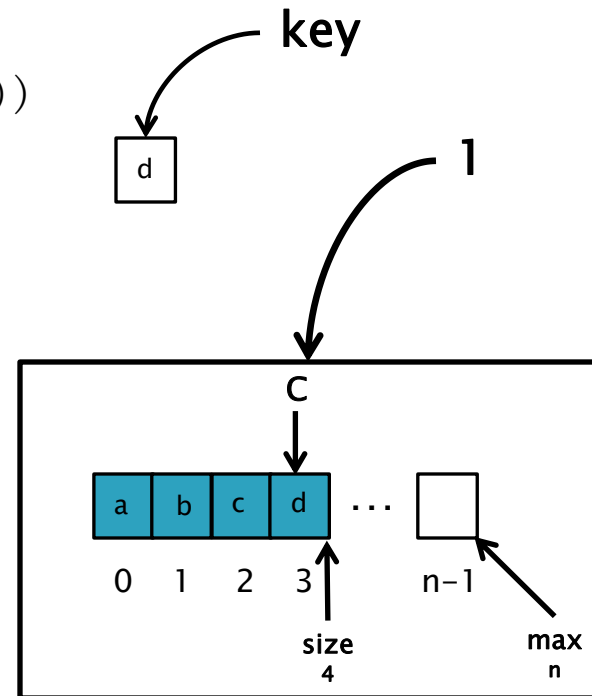


Search Item (Static Method)

...

```
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}
```

...


Example #3

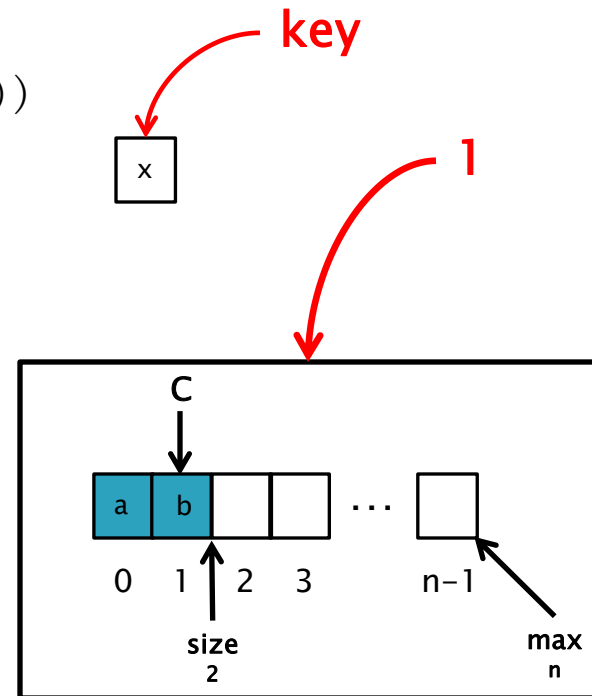

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #3

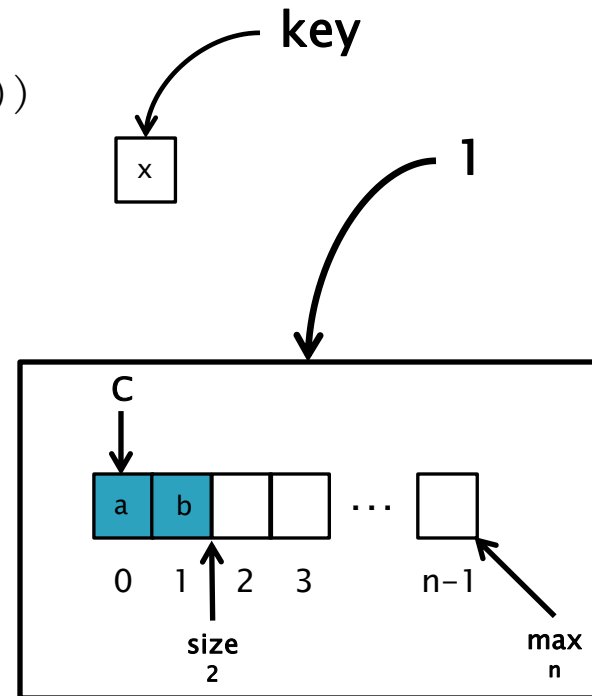

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #3

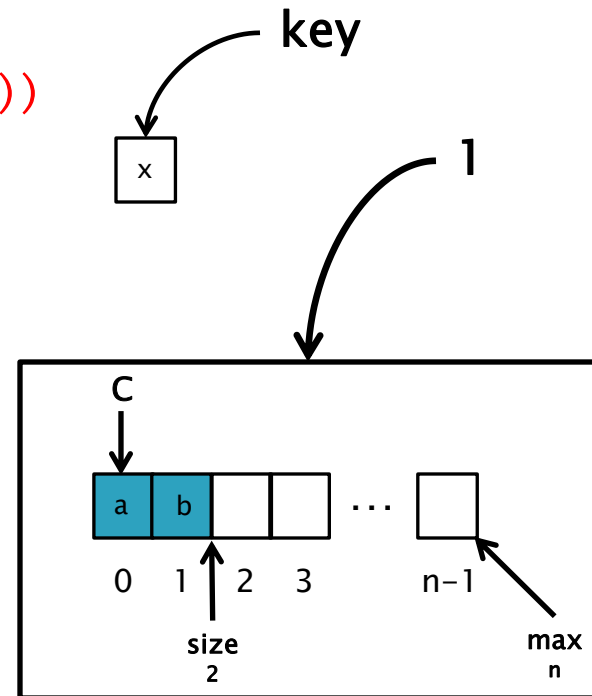

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
  
    return false;  
}  
...
```


Example #3

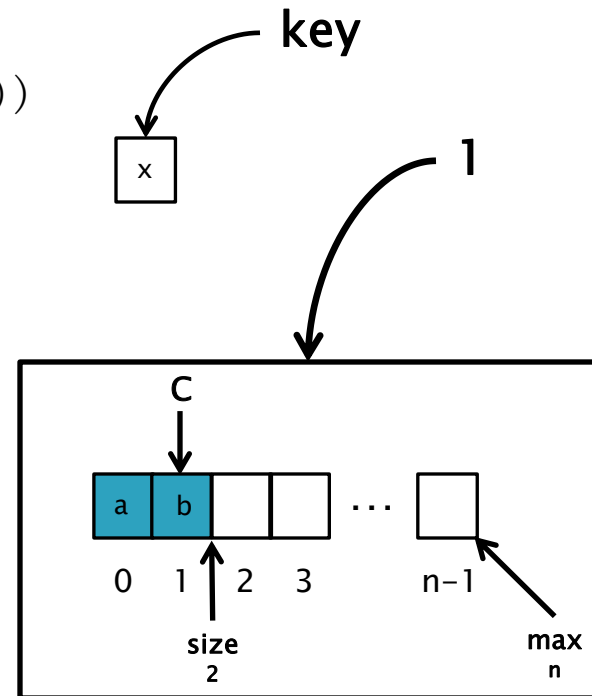

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #3

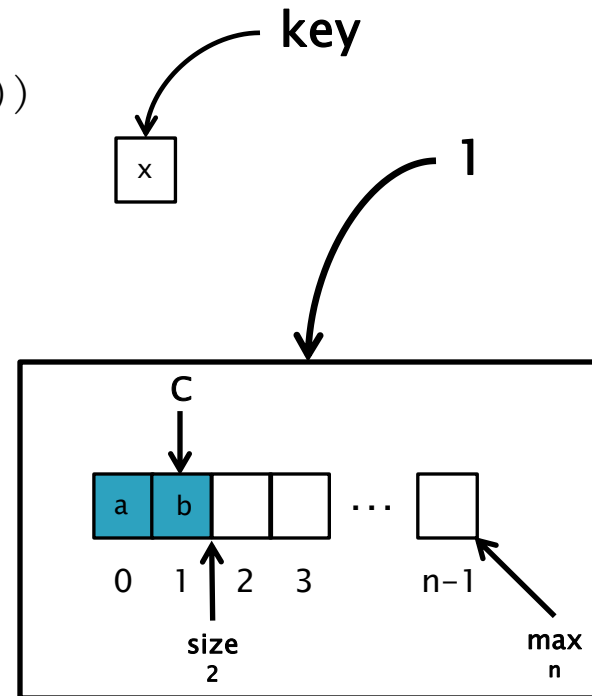

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #3

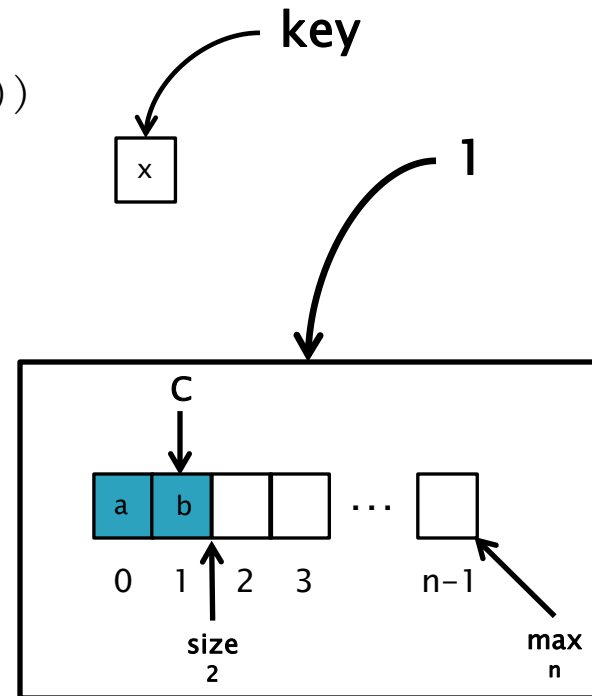

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```


Example #4

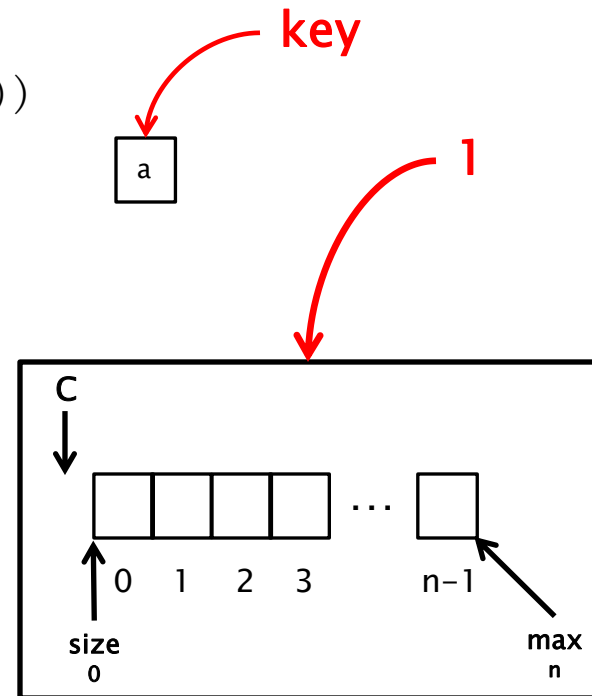

Search Item (Static Method)

```
...  
public static boolean find(ArrayList<T> l, T key) {  
    if(l.empty() == false) {  
        l.findfirst();  
        while(l.last() == false) {  
            if(l.retrieve().equals(key))  
                return true;  
            l.findnext();  
        }  
        if(l.retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```

Example #4

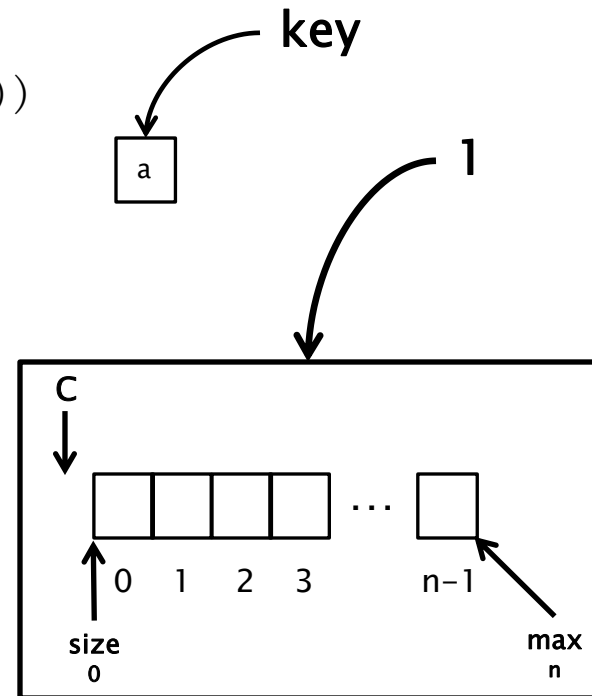

ADT List

You are required to implement the same search method but this time as a member method of the ADT List (Linked List implementation).

Search Item (Member Method) #1

...

```
public boolean find(T key) {  
    Node<T> tmp = current;  
    current = head;  
    while(current != null) {  
        if(current.data.equals(key))  
            return true;  
        currnet = current.next;  
    }  
    current = tmp;  
    return false;  
}
```

...



Search Item (Member Method) #2

...

```
public boolean find(T key) {  
    Node<T> tmp = head;  
    while(tmp != null) {  
        if(tmp.data.equals(key)) {  
            current = tmp;  
            return true;  
        }  
        tmp = tmp.next;  
    }  
    return false;  
}
```

...



Search Item (Member Method) #3

```
...  
public boolean find(T key) {  
    if(empty() == false) {  
        findfirst();  
        while(last() == false) {  
            if(retrieve().equals(key))  
                return true;  
            findnext();  
        }  
        if(retrieve().equals(key))  
            return true;  
    }  
    return false;  
}  
...
```



Comparison: Linked & Array Based Lists

Comparison on the basis:

- ▶ *worst case* time complexity operations
 - Linked List: insert- $O(1)$; remove – $O(n)$.
 - Array List: insert – $O(n)$; remove – $O(n)$.
 - All other operations have time complexity $O(1)$.
- ▶ Best case time complexities?

(We will discuss Big O notation in detail later)

Comparison: Linked & Array Based Lists

▶ Linked List.

- Advantages: No need to know the size in advance. Fast “Insert” – $O(1)$.
- Disadvantage: a pointer at each node (more memory needed). For traversal, pointer hopping is required.

▶ Array Based List.

- Advantages: No pointers to be stored (less memory). For traversal, no pointer hopping is required (array faster in traversal).
- Disadvantage: list size must be known in advance. Slow “Insert” – $O(n)$.

List: Other Implementations

▶ Singly-Linked List.



- Design Variations: (i) Count of elements may be kept i.e. *size*. **Why?** (ii) pointer to tail may be kept i.e. *last*. **Why?**

▶ Doubly-Linked List.


- each node has two pointers: next node and previous node.
- Advantages: it is efficient to go from a node to its previous node or move back-to-front in the list
- operations insert – $O(1)$;
- remove – $O(1)$.

(We will cover this topic in detail later)


List: Singly Linked

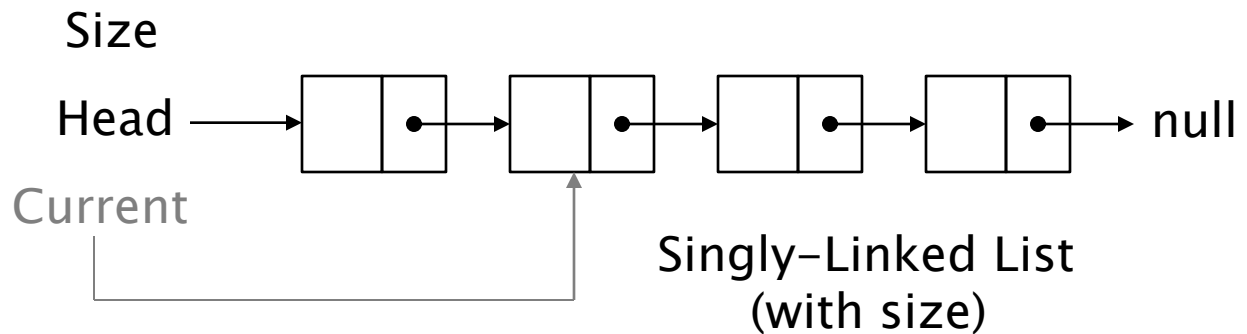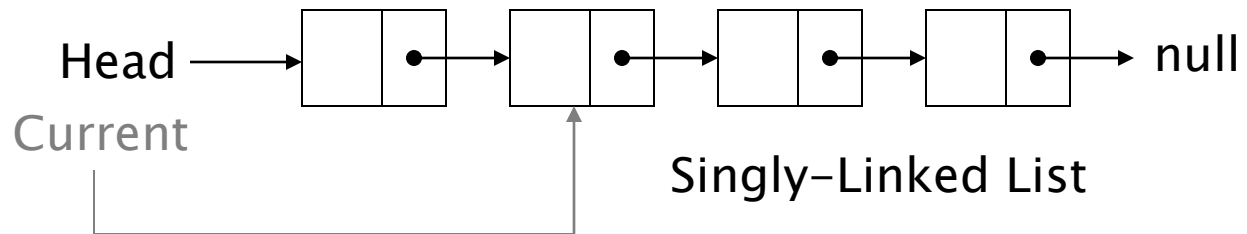

List: Singly Linked with Tail

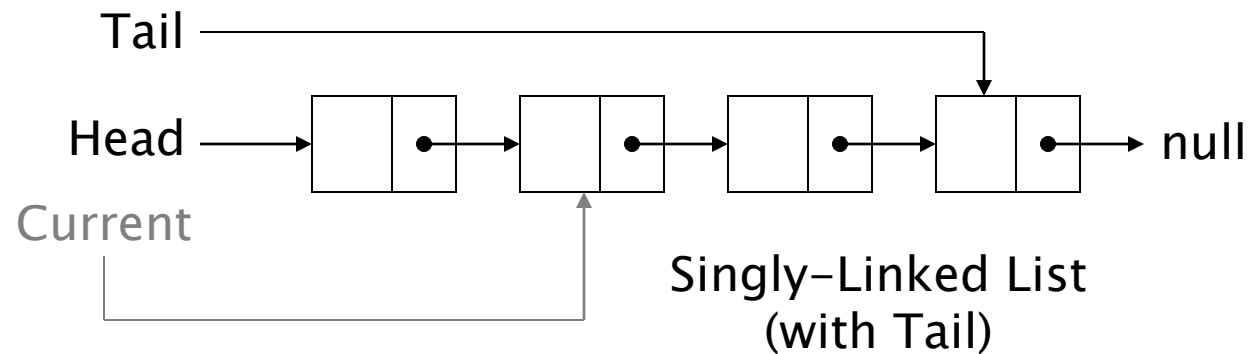

List: Doubly-Linked

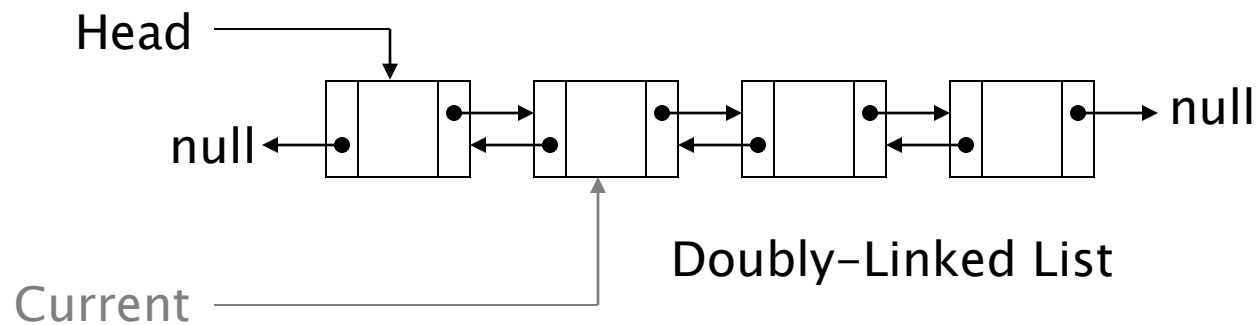

List: Other Implementations


▶ List with Sentinel Nodes.

- Has special header & trailer nodes that do not store data
- All nodes that store data have previous & next nodes – so no special cases for insert & remove.
- Advantage– simplifies code

▶ Circular List.

- tail pointer made to point to the head → tail has next node. Advantage: simpler code.

List: with Sentinel Nodes

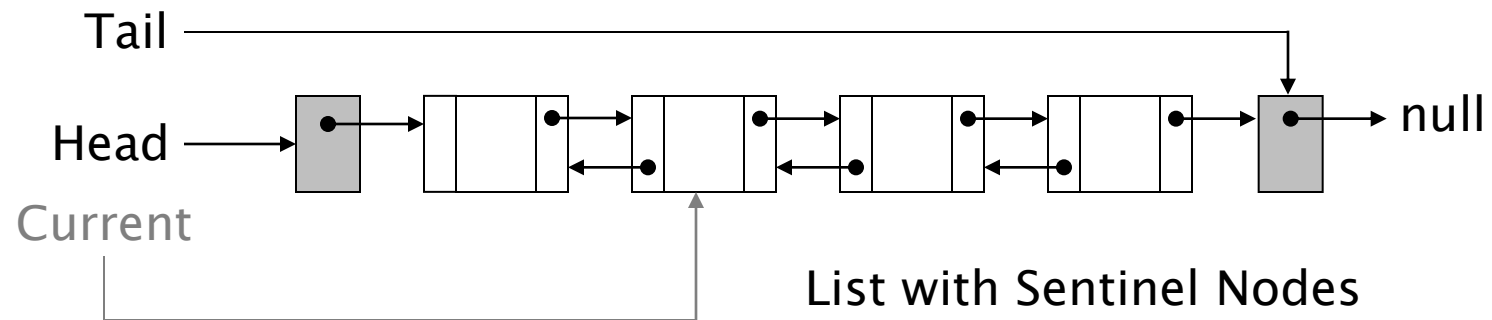

List: Circular List

